

Cub Cadet[®]

ENDURO SERIES[™]

FORCE SERIES

PRO SERIES



CATALOGUE 2019

MORE POWER TO YOU

OUR HISTORY KEEPS US GOING

1961
1st Cub Cadet
hits the Market

1963
1st Shaft
Drive Model

1980
1st Super
Garden Tractor

1980
1st Twin Cylinder
Engine

1993
1st Steerable
Track Drive Snow
Thrower

2006
Utility Vehicles
Debut



1966
The world's 1st
Garden Tractor
with Hydrostatic
Transmission

1972
"Cadet" Lawn
Tractor Debuts

1985
Breaking New Ground
in Cut Quality

1994
1st Lawn Tractor
with Shaft Drive

2005
500 Series Lawn Tractors –
Made in Germany

We know what our customers expect from their gardening equipment: Power, performance, endurance and durability. That's why we strive for every Cub Cadet product to be the best in class.

We continuously endeavour to further improve our product ranges, by incorporating new and proven technologies, implementing innovative engineering solutions and offering service solutions and accessory ranges that deliver true advantages.

With constantly higher quality standards and power, we ensure you get the ultimate user experience. Power you can rely on again and again.

<p>2007 Synchro-Steer® Technology debuts, an Industry First</p>	<p>2011 50th Anniversary Celebration with Innovation</p>	<p>2014 Introduction of the innovative Boosted Airflow Technology</p>	<p>2017 Introduction of the PRO SERIES – Zero-Turns</p>	<p>2018 Introduction of the 80V LI-ION DURA SYSTEM Battery Technology</p>	<p>2018 Introduction of the XM Series Lawnmowers</p>	
						
						
<p>2009 Industry's Tightest Turning Circle</p>	<p>2010 Most Advanced Residential Zero-Turn</p>	<p>2012 Introduction of the TRILOY Series Lawnmowers</p>	<p>2015 MySpeed – The Innovative Variable Speed System</p>	<p>2017 Introduction of the XT ENDURO SERIES Lawn Tractors</p>	<p>2018 Introduction of the XR ENDURO SERIES Robotic Mowers</p>	

THE CUB CADET PRODUCT HIGHLIGHTS FOR 2019

GREAT POWER – IMPRESSIVE REACH

Last year, we were delighted with new product lines that made an immediate impact on the market: XM lawnmowers and XR robotic mowers. Building on this success, Cub Cadet is expanding these model ranges for 2019.

The XM3 ER53 is the new flagship model of the XM series. It raises the bar for top class lawnmowers in terms of both power and performance.

Then there's the XR1 500 robotic mower, which is our entry model in the automated mowing category. It demonstrates that performance can be combined with low price.

The third new product is the LC2 BP6, a powerful lawn edge cutter that achieves clean edges – fast and precisely.



XM3 ENDURO SERIES™

Our new top of the range lawnmower is the Cub Cadet XM3 ER53. The key to its power lies in the powerful Kawasaki engine which fully meets professional requirements, gaining more output than expected from every cubic cm of engine displacement.

The blade-brake clutch allows the engine to continue running with the mowing deck switched off so there's no need to restart the engine, saving you time.

NEW

NEW

XR1

ENDURO SERIES™



The Cub Cadet XR1 500 is the ideal entry-level robotic model. Its robust design features metal sliding surfaces and steel blades as well as a floating mulch deck. With these features and its powerful 100 Watt motor it packs a punch that makes it stand out from the crowd of entry-level robotic mowers.

LC

FORCE SERIES

Achieving perfect lawn edges is now no longer a chore, thanks to the LC2 BP6. This powerful lawn edge cutter does the job quickly and efficiently, even shaping long straight edges thanks to its clever design.

NEW



THE CUB CADET PRODUCT SERIES FOR 2019

EXCEED YOUR EXPECTATIONS.

THE CUB CADET PRODUCT CATEGORIES

At Cub Cadet we are continually improving our product to meet the expectations and requirements of our customers.

Our FORCE SERIES models are suited to beginners, the ENDURO SERIES™ fit the bill for experienced users and our PRO SERIES is ideal for professionals.

These categories are designed to help customers and dealers find the perfect product for their needs.



CONTENTS



INTRODUCTION	1-2	New product highlights
	3	Cub Cadet product series
	5-8	Find your Cub Cadet model

LAWNMOWERS	1	9-26	LM Lawnmowers
		27-40	XM Lawnmowers



MINI-RIDERS	2	41-48	LR Mini-Rider
		45	Mini-Rider accessories



LAWN TRACTORS	3	49-58	LT Lawn Tractors
		59-78	XT Lawn Tractors
		79-82	Lawn Tractor accessories



ROBOTIC MOWERS	4	83-98	XR Robotic Mowers
		99-100	Robotic Mower accessories



80V LI-ION DURA SYSTEM	5	101-110	80V Li-Ion Dura System
		105	80V Leaf Blower
		106-108	80V Hedge Trimmer
		107-109	80V Lawn Trimmer
		108-110	80V Lawnmowers



CHORE PERFORMERS	6	113	Lawn Edge Cutter
		114	Lawn Trimmer
		115	Scarifier
		116	Tiller



ZERO-TURNS	7	119-128	XZ Zero-Turns
		129-130	XZ accessories
		131-144	PRO Zero-Turns
		145-146	PRO SERIES accessories



FIND YOUR CUB CADET MODEL

FORCE SERIES FOR AMBITIOUS GARDENERS

These entry-level machines are the perfect solution if you have a medium to large sized garden and are looking for a lawnmower with power, performance and durability.

ENDURO SERIES™ FOR EXPERTS

Ideal for ambitious gardeners with a landscaped garden. If you are looking to “move up a level” then the added power and performance will allow you to finish your work faster and with better results. As an experienced gardener, you are looking for the perfect lawnmower to meet your high demands.

PRO SERIES FOR PROFESSIONALS

A must if you are a true professional, a landscape gardener who is required to professionally maintain large park areas and public green spaces on a daily basis. You place great value on premium performance, absolute reliability of your equipment and the ultimate efficiency in use.

THE FASTEST WAY TO YOUR IDEAL MODEL

Did you know that the cutting width of your lawnmower (the size of the cutting deck) is the key factor in determining how much time you need to mow your lawn. The larger the cutting width, the faster you're done!

Using the football field illustration as a guide, the diagrams on the next 3 pages will help illustrate the differences in the area of cutting achievable per hour for each of the Cub Cadet Series – Force, Enduro and PRO.

CUTTING AREA EXAMPLE

With a 42cm / 16" cutting width, you can mow a 650m² lawn in about an hour (in collecting mode). Choose a 53cm / 21" lawnmower and you could manage 950m² in the same time. Alternatively, with the 53cm / 21" cutting width, you can mow a 600m² lawn in just 40 minutes instead of an hour.



FORCE SERIES

LM LR LT

LM LAWNMOWERS

The LM lawnmowers in the FORCE SERIES are ideally suited for smaller and winding lawns. Cordless lithium-ion battery models offer lightweight mowing, push models with petrol engines cover more ground and self-propelled and MySPEED models drive the wheels as well making it even easier to cut the lawn.

LR MINI-RIDERS

These mini-riders are the perfect choice when you need to mow a sizeable lawn but have narrow passages. Easy to use and compact in design these have the same strength, durability and cutting characteristics of our larger tractors.

LT LAWN TRACTORS



The LT Lawn Tractors are the most powerful models in the FORCE SERIES. With the largest cutting decks and biggest collection bags as well as side discharge and rear collection models - dealing with larger lawns is made easier and more enjoyable.



MULCHING OR DISCHARGING



COLLECTING & EMPTYING

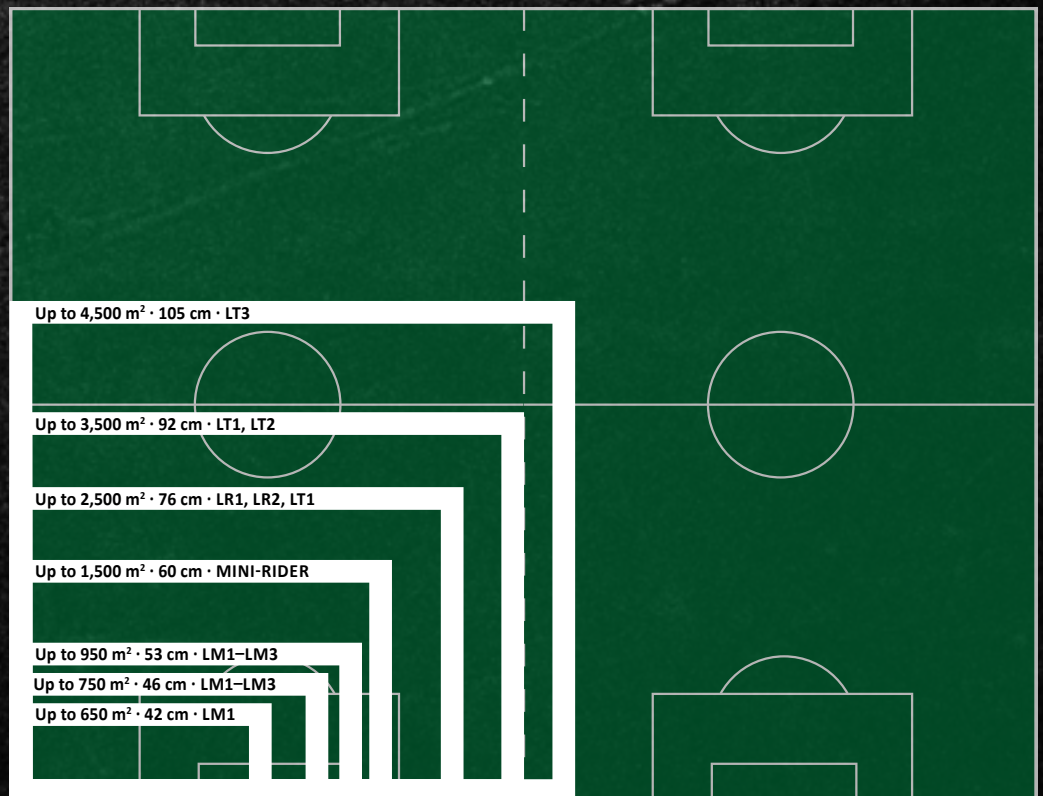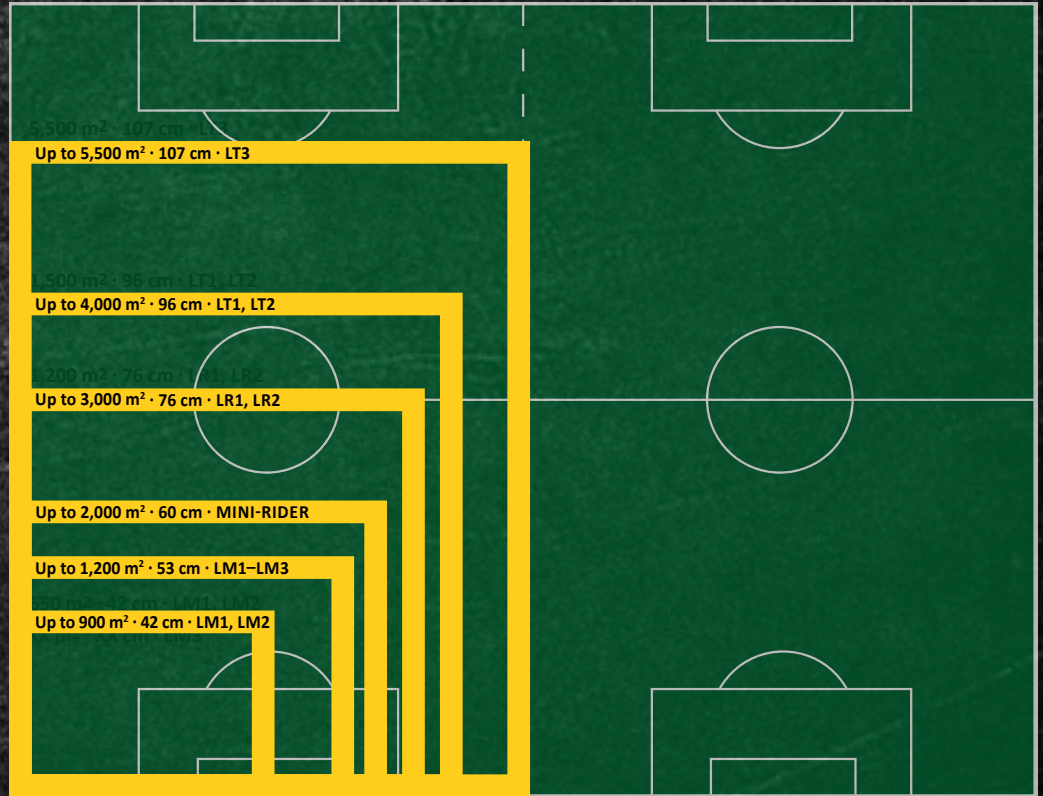

The above illustrations are to be used as a guide only as specifications and conditions will affect performance.

ENDURO SERIES™

XM

XT

XZ

XM LAWNMOWERS



The XM Lawnmowers in the ENDURO SERIES are a step up in performance, innovation and design, packed with extensive features including 3T technology, variable speed and high-performance engines.

XT LAWN TRACTORS

Step up to unbeatable power, performance and efficiency from a range of lawn tractors that deliver best-in-class strength, durability and quality. With market leading features including the smallest turning circle and ultra-efficient EFI engines, these are the most innovative lawn tractors we have ever built.

XZ ZERO-TURN

The XZ line up of Zero-Turns feature the innovative 360° turning technology, providing the ultimate manoeuvrability. XZ Zero-Turns with SyncroSteer benefit from full steering wheel control over all four wheels, perfect for hills and undulating terrain.

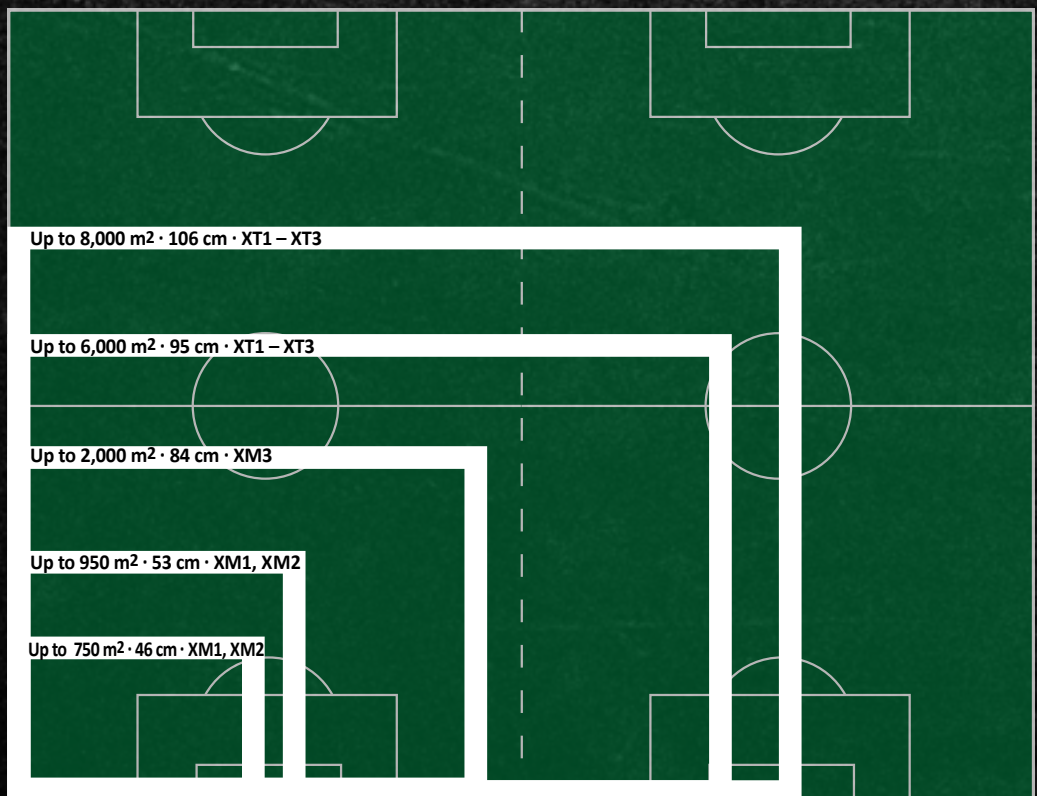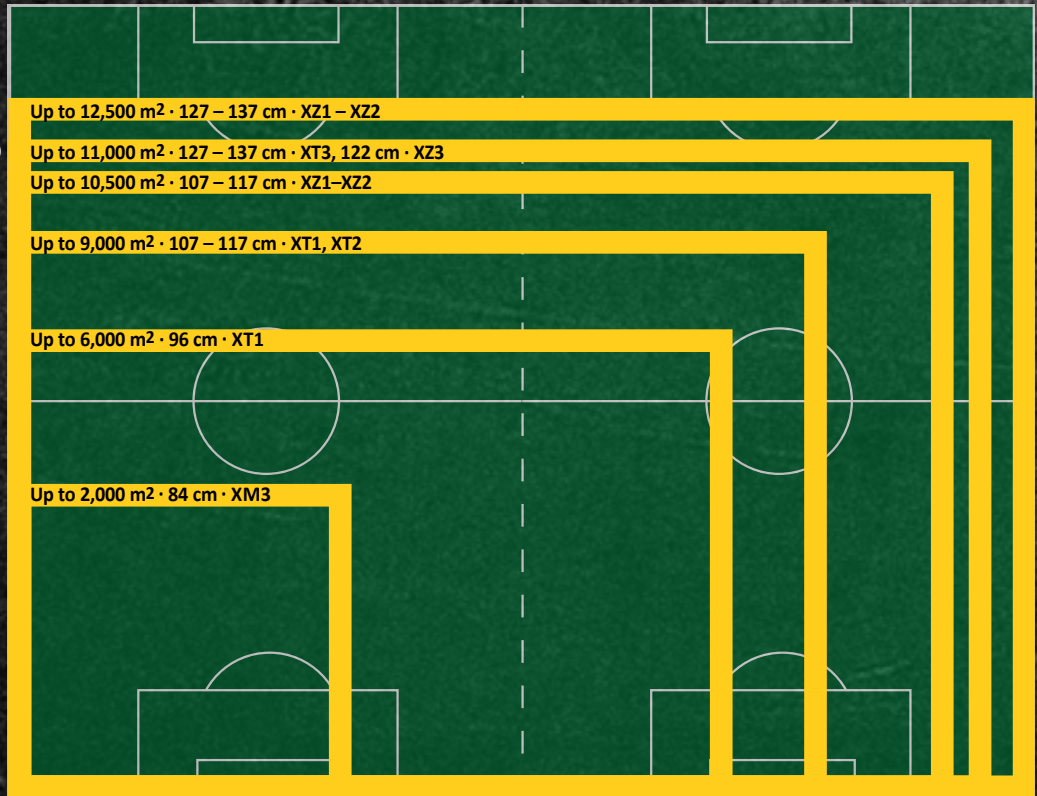

The above illustrations are to be used as a guide only as specifications and conditions will affect performance.

PRO SERIES

Z1 Z5 Z7

PRO Z

ZERO-TURN


The models in the PRO SERIES are the ultimate in performance, designed to handle the serious rigors of professional users. With outstanding speed, efficiency and comfort, these machines impress users on a daily basis.



MULCHING OR
DISCHARGING



COLLECTING &
EMPTYING

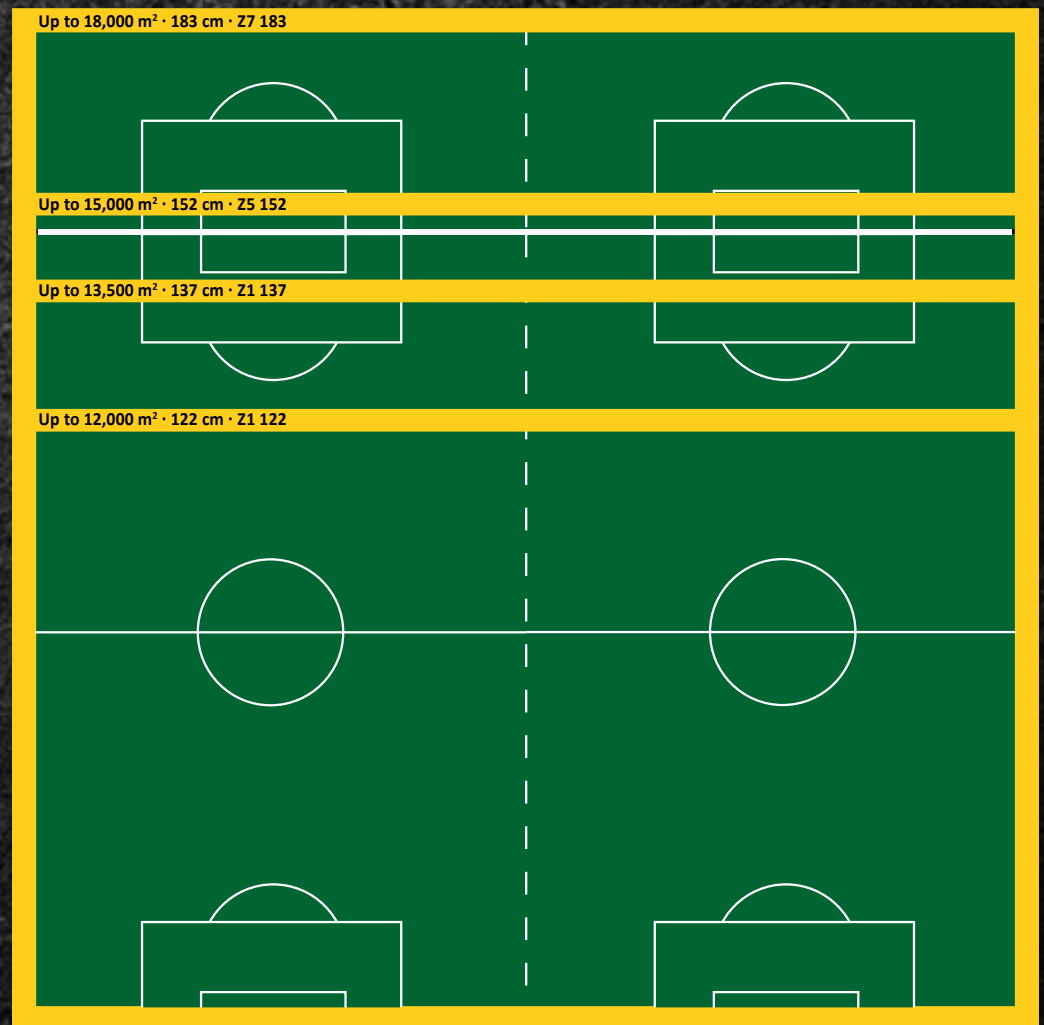

The above illustrations are to be used as a guide only as specifications and conditions will affect performance.

PROFESSIONAL ZERO-TURNS

Great Power, Zero-Turning Circle



The surface area illustrations are to show what could be achieved in 1 hour with optimal mowing conditions. There are several factors which can influence performance: the texture of the lawn, (height, density, humidity), the lawn area (hills, gradients, shapes and obstacles such as trees, ponds etc) and working temperature. For hills requiring ascending and descending, we recommend a more powerful model with a steering wheel.

Cub Cadet[®]





LM
FORCE SERIES

XM
ENDURO SERIES™

**HARD
WORKING.
EASY TO USE.**

LAWNMOWERS

A lawnmower should be easy to use, hard-working and deliver flawless performance with features that boast incredible control, unmatched efficiency and user comfort. If you are looking to maintain a small, irregular shaped lawn, or even larger undulating grounds, there is a size and model to meet your needs. From lithium-ion battery lawnmowers to wide cut large area mowers, all Cub Cadet lawnmowers are guaranteed to deliver the pristine Cub Cadet cut, mow after mow, season after season.

Cub Cadet[®]

LM1
FORCE SERIES



3-in-1 OPTION

COLLECT, DISCHARGE & OPTIONAL MULCHING.

3-in-1 option means that you have the choice between collecting the clippings, or discharging them out the back. You also have the option to buy an additional mulch kit as an accessory.

LM SERIES – PERFECT CUT AND PERFECT COLLECTION

Their tough construction ensures a long life cycle and the Cub Cadet OHV engine delivers power and performance to meet and exceed your demands.

With the Cub Cadet LM Range, you have the choice between collecting and discharging the clippings and lots of other useful features including easy-to-empty grass bag, ergonomically formed handle, convenient central height adjustment and ball bearing wheels. Mowing the lawn with a LM lawnmower is more pleasure, than a chore.



LARGE GRASS BAG


A large grass bag reduces the amount of time emptying it, enabling quicker mowing and reducing the number of trips to the compost heap.

The cloth bag fits through the mowers handle to secure in place and can easily be removed. A quick, simple and efficient system.



CENTRAL CUTTING HEIGHT ADJUSTMENT

Comfortably change the cutting height centrally with one lever – choose from 6 different positions giving a cutting height range from 28 - 92mm.



ERGONOMIC HANDLE

Ergonomic handle gives you full control of the lawnmower with the most comfortable hand position. The handle is fully foldable for space-saving storage and easy transport.



SELF-PROPELLED

Self-propelled mowers make mowing on sloping and expansive terrain a breeze. Varispeed models can adapt to your personal pace.



LM1 FORCE SERIES

The Cub Cadet LM1 range feature a 3-in-1 option, which gives you the choice between bagging and discharging the clippings and the option to mulch with a mulch accessory kit.



3-in-1
OPTION
POWERED BY
Cub Cadet

LM1 AP42

Cutting width:	42 cm / 16"
Mowing area:	650 m ² /h
Grass bag capacity:	60 l
Engine:	Cub Cadet 35 OHV, Pull starter
Engine displacement:	79 cm ³
Drive:	Push
Cutting height adjustment:	6 positions/central
Model number:	11A-LQSJ603



3-in-1
OPTION
POWERED BY
Cub Cadet

LM1 AR42

Cutting width:	42 cm / 16"
Mowing area:	650 m ² /h
Grass bag capacity:	60 l
Engine:	Cub Cadet 35 OHV, Pull starter
Engine displacement:	79 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central
Model number:	12A-LQSJ603



3-in-1
OPTION
POWERED BY
Cub Cadet

LM1 AP46

Cutting width:	46 cm / 18"
Mowing area:	700 m ² /h
Grass bag capacity:	60 l
Engine:	Cub Cadet 35 OHV, Pull starter
Engine displacement:	79 cm ³
Drive:	Push
Cutting height adjustment:	6 positions/central
Model number:	11A-TQSI603

THE 4TH AND 5TH LETTER IN THE MOWER NAME

Cub Cadet products are named to showcase their technical information and details.

The 4th letter of the product name always indicates the engine displacement. For walk behind mowers the letters stand for:

A = up till 99 ccm	E = 176–200 ccm	I = 276–300 ccm
B = 100–125 ccm	F = 201–225 ccm	J = 301–325 ccm
C = 126–150 ccm	G = 226–250 ccm	K = 326–350 ccm
D = 151–175 ccm	H = 251–275 ccm	L = 351–375 ccm

The 5th letter shows whether it's a push mower or self-propelled via rear- or front-wheel drive:

P = push mower
F = front-wheel drive
R = rear-wheel drive

Additional lower-case letters signal further special product features and benefits, e.g.:

e = electric starter
s = MySpeed

MULCHING LAWMOWERS. CLEVER AND ENVIRONMENTALLY FRIENDLY.

Everyone who likes beautifully groomed lawns should have a mulching lawnmower to optimise the nutrient cycle of the lawn. Our mulching mowers are perfect for this type of lawn care with the grass being cut several times and then equally distributed onto the ground where it can be used as a natural green fertiliser. This saves on fertilisers, which is not only good for the environment but good for your wallet as well. Another benefit of a mulching mower is that there is no collecting or grass disposal, meaning you do not have to stop to empty the grass bag which is a great time saver.



LM1 AR46

Cutting width:	46 cm / 18"
Mowing area:	700 m ² /h
Grass bag capacity:	60 l
Engine:	Cub Cadet 35 OHV, Pull starter
Engine displacement:	79 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central
Model number:	12A-TQSI603



LM1 CR53

Cutting width:	53 cm / 21"
Mowing area:	950 m ² /h
Grass bag capacity:	70 l
Engine:	Cub Cadet 45 OHV, Pull starter
Engine displacement:	140 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central
Model number:	12A-PQSC603



LM1 DF53

Cutting width:	53 cm / 21"
Mowing area:	1,200 m ² /h
Ejection type:	Side discharge
Engine:	Cub Cadet 55 OHV, Pull starter with AutoChoke
Engine displacement:	159 cm ³
Drive:	Front-wheel drive
Cutting height adjustment:	individual, 9 positions
Model number:	12A-A02P603

Cub Cadet®



MOW AT YOUR OWN PACE

The intuitive, state-of-the-art MySPEED™ handle on our LM2 and LM3 Lawnmowers means that the lawnmower drives at your walking speed. Simply grab the handle, start to walk and see how easy and relaxing mowing can be.

The MySPEED™ system delivers high-performance and industry-leading control with ultra-soft rubber grips to reduce vibrations and operator fatigue. With a MySPEED™ equipped lawnmower, you will experience smoother engagement, superior speed variability and enhanced traction – all with no effort and whilst simply walking at your natural pace.



MY SPEED

THE MYSPEED™ DRIVE SYSTEM

The wheel drive is automatically switched on as soon as you push the handle forward. The speed automatically adjusts to your walking speed.



MY SPEED EVO

THE MYSPEED™ EVO DRIVE SYSTEM

MySpeed EVO lets you configure the maximum speed step-by-step by adjusting the mower speed to the terrain. For example, when you need to limit the maximum speed in angled areas and flower beds for maximum manoeuvrability. For long straights, however, faster mowing makes sense (only with XM2 DR46s).

LM2 FORCE SERIES

ELECTRIC START

Get your lawnmower started with the turn of a key.

MySPEED™ VARIABLE SPEED CONTROL

With a variable drive speed system you will set your mowing pace, not the lawnmower.

HEIGHT ADJUSTABLE HANDLE

The handle can be matched to your preferred height, providing a stress and fatigue free mowing experience.

CENTRAL CUTTING HEIGHT ADJUSTMENT

One lever adjusts all four wheels simultaneously. The conveniently placed central lever enables six different cutting heights from 28 – 92mm.

LARGE GRASS BAG

A large grass bag reduces the amount of time spent emptying it, enabling quicker mowing and reducing the number of trips to the compost heap.



3-in-1

COLLECT, DISCHARGE & MULCHING.

3-in-1 means that you have the choice between collecting the clippings, discharging them out the back, or mulching.

1
LAWNMOWERS

MYSPEED

THE MySPEED™ DRIVE SYSTEM.

The intuitive MySPEED™ drive system engages once the handle is pushed forward. If you walk faster, the handle is naturally pushed further forward and the lawnmower speed increases effortlessly.

If you walk slower, the handle automatically pivots back and the lawnmower slows down. If you stop walking, the handle moves to neutral and the lawnmower stands still, ready to move when you do.

When in motion, the lawnmower speed reacts to your desired walking speed, meaning a relaxed and natural mowing experience.

TIP: Do not pivot the handle forward to engage the MySPEED™ drive system. Simply grab the handle and start to walk normally. The handle will gradually pivot forward and the lawnmower will start to move forward with you.



3-in-1
POWERED BY
Cub Cadet
MYSPEED

LM2 DR46s

Cutting width:	46 cm / 18"
Mowing area:	750 m ² /h
Grass bag capacity:	60 l
Engine:	Cub Cadet 55 OHV, Pull starter with AutoChoke
Engine displacement:	159 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central
Model number:	12BBTQKC603



3-in-1
POWERED BY
Cub Cadet
MYSPEED

LM2 DR46es

Cutting width:	46 cm / 18"
Mowing area:	750 m ² /h
Grass bag capacity:	60 l
Engine:	Cub Cadet 55 OHV, Electric starter
Engine displacement:	159 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central
Model number:	12BCTQS7603



3-in-1
POWERED BY
Cub Cadet
MYSPEED

LM2 DR53s

Cutting width:	53 cm / 21"
Mowing area:	950 m ² /h
Grass bag capacity:	70 l
Engine:	Cub Cadet 55 OHV, Pull starter with AutoChoke
Engine displacement:	159 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central
Model number:	12BBPQKC603

LM3 FORCE SERIES



EASY STARTING B&S ENGINE

The Briggs & Stratton engines with ReadyStart® Technology and Start Guarantee® let you start the mower easily and confidently.



4-in-1



MYSPEED

LM3 CR46s

Cutting width:	46 cm / 18"
Mowing area:	750 m ² /h
Grass bag capacity:	60 l
Engine:	B&S 575 EX Series, ReadyStart®, Pull starter
Engine displacement:	140 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central
Model number:	12BBTV5E603

4-in-1

COLLECTION, REAR DISCHARGE, SIDE DISCHARGE & MULCHING.

4-in-1 means you have the choice of four different options for disposing of the grass clippings, giving you the flexibility to mow your way. A 4-in-1 lawnmower offers the freedom to select the ideal discharge solution for all conditions.



HIGH REAR WHEELS

High rear wheels let you negotiate potholes and uneven lawns effortlessly, for ultra-comfortable handling and smooth driving.



FRONT CASTER WHEELS

The caster wheels of this mower give you optimal manoeuvrability. (available on LM3 ER53)



HARD TOP BAG WITH FILL INDICATOR

The dust proof hard top keeps dust down during dry periods and the fill indicator flap signals when the grass bag is ready to be emptied. (not available on LM3 ER53)



VARIOSPEED CONTROL

Six speeds let you adjust your pace to every setting: slower on tighter curves; faster for larger areas. (available on LM3 ER53)



LM3 CR53s

Cutting width:	53 cm / 21"
Mowing area:	950 m ² /h
Grass bag capacity:	70 l
Engine:	B&S 625 EXi Series, ReadyStart®, Pull starter
Engine displacement:	150 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central
Model number:	12BBPV5L603



LM3 DR53es

Cutting width:	53 cm / 21"
Mowing area:	950 m ² /h
Grass bag capacity:	70 l
Engine:	Cub Cadet 55 OHV ES, Electric starter
Engine displacement:	159 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central
Model number:	12BCPVS7603




LM3 ER53

Cutting width:	53 cm / 21"
Mowing area:	950 m ² /h
Grass bag capacity:	70 l
Engine:	Cub Cadet 60 OHV, Pull starter with AutoChoke
Engine displacement:	196 cm ³
Drive:	Rear-wheel drive
Cutting height adjustment:	6 at the front/rear, central
Model number:	12AQC6J4603

LM1 AP42

LM1 AR42

ENGINE		
Engine type	Cub Cadet 35 OHV	Cub Cadet 35 OHV
Engine displacement	79 cm ³	79 cm ³
Rated power	1.6 kW / 2,800 min ⁻¹	1.6 kW / 2,800 min ⁻¹
Engine start	Pull	Pull
Tank volume (capacity)	0.75 l	0.75 l
DRIVE SYSTEM		
Drive	Pushed	Rear-wheel drive
Number of speeds	-	1
Speed (max)	-	3.6 km/h
CUTTING SYSTEM		
Mowing area in m ² /h	650	650
Cutting deck (material)	Steel	Steel
Cutting width	42 cm / 16"	42 cm / 16"
Cutting options	3-in-1 Option	3-in-1 Option
Cutting height adjustment	6 positions/central	6 positions/central
Cutting height (min-max)	28-92 mm	28-92 mm
Grass bag	Standard	Standard
Mulch Kit (Product code)	Optional (196-588-678)	Optional (196-588-678)
Side discharge	-	-
Rear discharge without collector	Standard	Standard
BAGGING		
Grass bag type	Soft bag	Soft bag
Grass bag capacity	60 l	60 l
Bag full indicator	-	-
WHEELS		
Wheels (F/R)	180 mm / 200 mm (7" / 8")	180 mm / 200 mm (7" / 8")
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	Ergonomic	Ergonomic
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	Soft-Grip	Soft-Grip
DIMENSIONS		
LpA/LwA/LwAg (dB)	84/94/96	84/94/96
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	150 cm / 46 cm / 114 cm	155 cm / 49 cm / 98.5 cm
Net weight	28 kg	35 kg
Model number	11A-LQMG603	12-LQMG603
EAN	 4 008423 892383 >	 4 008423 892369 >


LM1 AP46

LM1 AR46

ENGINE		
Engine type	Cub Cadet 35 OHV	Cub Cadet 35 OHV
Engine displacement	79 cm ³	79 cm ³
Rated power	1.6 kW / 2,800 min ⁻¹	1.6 kW / 2,800 min ⁻¹
Engine start	Pull	Pull
Tank volume (capacity)	0.75 l	0.75 l
DRIVE SYSTEM		
Drive	Pushed	Rear-wheel drive
Number of speeds	-	1
Speed (max)	-	3.6 km/h
CUTTING SYSTEM		
Mowing area in m ² /h	700	700
Cutting deck (material)	Steel	Steel
Cutting width	46 cm / 18"	46 cm / 18"
Cutting options	3-in-1 Option	3-in-1 Option
Cutting height adjustment	6 positions/central	6 positions/central
Cutting height (min-max)	28-92 mm	28-92 mm
Grass bag	Standard	Standard
Mulch Kit (Product code)	Optional (196-588-678)	Optional (196-588-678)
Side discharge	-	-
Rear discharge without collector	Standard	Standard
BAGGING		
Grass bag type	Soft bag	Soft bag
Grass bag capacity	60 l	60 l
Bag full indicator	-	-
WHEELS		
Wheels (F/R)	180 mm / 200 mm (7" / 8")	180 mm / 200 mm (7" / 8")
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	Ergonomic	Ergonomic
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	Soft-Grip	Soft-Grip
DIMENSIONS		
LpA/LwA/LwAg (dB)	84/94/96	84/94/96
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	155 cm / 49 cm / 114 cm	155 cm / 49 cm / 114 cm
Net weight	28 kg	35 kg
Model number	11A-TQMG603	12A-TQMG603
EAN	 4 008423 892390 >	 4 008423 892406 >

LM1 CR53

LM1 DF53

ENGINE		
Engine type	Cub Cadet 45 OHV	Cub Cadet 55 OHV
Engine displacement	140 cm ³	159 cm ³
Rated power	2.1 kW / 2,800 min ⁻¹	2.5 kW / 2,900 min ⁻¹
Engine start	Pull	Pull/AutoChoke
Tank volume (capacity)	1.0 l	1.0 l
DRIVE SYSTEM		
Drive	Rear-wheel drive	Front-wheel drive
Number of speeds	1	1
Speed (max)	3.6 km/h	3.6 km/h
CUTTING SYSTEM		
Mowing area in m ² /h	950	1,200
Cutting deck (material)	Steel	Steel
Cutting width	53 cm / 21"	53 cm / 21"
Cutting options	3-in-1 Option	2-in-1
Cutting height adjustment	6 positions/central	9 Individual
Cutting height (min-max)	28-92 mm	35-100 mm
Grass bag	Standard	-
Mulch Kit (product code)	Optional (196-589-678)	Standard
Side discharge	-	Standard
Rear discharge without collector	Standard	-
BAGGING		
Grass bag type	Soft bag	-
Grass bag capacity	70 l	-
Bag full indicator	-	-
WHEELS		
Wheels (F/R)	200 mm / 200 mm (8" / 8")	200 mm / 200 mm (8" / 8")
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	-
Handle type	Ergonomic	Ergonomic
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	Soft-Grip	Mold injected grip
DIMENSIONS		
LpA/LwA/LwAg (dB)	86/96/98	86/96/98
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	162 cm / 58 cm / 114 cm	162 cm / 58 cm / 114 cm
Net weight	34 kg	26 kg
Model number	12A-PQSC603	12A-A02P603
EAN	 4 008423 872637	 4 008423 884968

LM2 DR46s

LM2 DR46es

LM2 DR53s

ENGINE			
Engine type	Cub Cadet 55 OHV	Cub Cadet 55 OHV ES	Cub Cadet 55 OHV
Engine displacement	159 cm ³	159 cm ³	159 cm ³
Rated power	2.5 kW / 2,800 min ⁻¹	2.5 kW / 2,800 min ⁻¹	2.5 kW / 2,800 min ⁻¹
Engine start	Pull/AutoChoke	Electric	Pull/AutoChoke
Tank volume (capacity)	1.0 l	1.0 l	1.0 l
DRIVE SYSTEM			
Drive	Rear-wheel drive	Rear-wheel drive	Rear-wheel drive
Number of speeds	Variable	Variable	Variable
Speed (max)	0–3.6 km/h	0–3.6 km/h	0–3.6 km/h
CUTTING SYSTEM			
Mowing area in m ² /h	750	750	950
Cutting deck (material)	Steel	Steel	Steel
Cutting width	46 cm / 18"	46 cm / 18"	53 cm / 21"
Cutting options	3-in-1	3-in-1	3-in-1
Cutting height adjustment	6 positions/central	6 positions/central	6 positions/central
Cutting height (min–max)	28–92 mm	28–92 mm	28–92 mm
Grass bag	Standard	Standard	Standard
Mulch Kit	Standard	Standard	Standard
Side discharge	-	-	-
Rear discharge without collector	Standard	Standard	Standard
BAGGING			
Grass bag type	Soft bag	Soft bag	Soft bag
Grass bag capacity	60 l	60 l	70 l
Bag full indicator	-	-	-
WHEELS			
Wheels (F/R)	180 mm / 200 mm (7" / 8")	180 mm / 200 mm (7" / 8")	200 mm / 200 mm (8" / 8")
Double ball bearings	Standard	Standard	Standard
COMFORT			
Washing nozzle	Standard	Standard	Standard
Handle type	MySpeed	MySpeed	MySpeed
Foldable handle	Standard	Standard	Standard
Height adjustable handle	Standard	Standard	Standard
Handle covering	-	-	-
DIMENSIONS			
LpA/LwA/LwAg (dB)	84/94/96	84/94/96	86/96/98
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	155 cm / 49 cm / 114 cm	155 cm / 49 cm / 114 cm	162 cm / 58 cm / 114 cm
Net weight	31 kg	35 kg	34 kg
Model number	12BBTQKC603	12BCTQS7603	12BBPQKC603
EAN	 4 008423 866148	 4 008423 866247	 4 008423 866131

LM3 CR46s

LM3 CR53s

ENGINE		
Engine type	B&S 575 EX Series, ReadyStart®	B&S 625 EXi Series, ReadyStart®
Engine displacement	140 cm ³	150 cm ³
Rated power	2.1 kW / 2,800 min ⁻¹	2.2 kW / 2,800 min ⁻¹
Engine start	Pull	Pull
Tank volume (capacity)	0.8 l	1.0 l
DRIVE SYSTEM		
Drive	Rear-wheel drive	Rear-wheel drive
Number of speeds	Variable	Variable
Speed (max)	0–3.6 km/h	0–3.6 km/h
CUTTING SYSTEM		
Mowing area in m ² /h	750	950
Cutting deck (material)	Steel	Steel
Cutting width	46 cm / 18"	53 cm / 21"
Cutting options	4-in-1	4-in-1
Cutting height adjustment	6 positions/central	6 positions/central
Cutting height (min–max)	28–92 mm	28–92 mm
Grass bag	Standard	Standard
Mulch Kit (Product code)	Standard	Standard
Side discharge	Standard	Standard
Rear discharge without collector	Standard	Standard
BAGGING		
Grass bag type	Soft bag with hard top	Soft bag with hard top
Grass bag capacity	60 l	70 l
Bag full indicator	Standard	Standard
WHEELS		
Wheels (F/R)	180 mm / 280 mm (7"/11")	200 mm / 280 mm (8"/11")
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	MySpeed	MySpeed
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	-	-
DIMENSIONS		
LpA/LwA/LwAg (dB)	84/94/96	86/96/98
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	155 cm / 49 cm / 114 cm	162 cm / 58 cm / 114 cm
Net weight	34 kg	36 kg
Model number	12BBTV5E603	12BBPV5L603
EAN	 4 008423 859324	 4 008423 859355

LM3 DR53es

LM3 ER53

ENGINE		
Engine type	Cub Cadet 55 OHV ES	Cub Cadet 65 OHV
Engine displacement	159 cm ³	196 cm ³
Rated power	2.5 kW / 2,800 min ⁻¹	3.3 kW / 2,750 min ⁻¹
Engine start	Electric	Pull/AutoChoke
Tank volume (capacity)	1.0 l	1.1 l
DRIVE SYSTEM		
Drive	Rear-wheel drive	Rear-wheel drive
Number of speeds	Variable	6
Speed (max)	0–3.6 km/h	2.8–4.5 km/h
CUTTING SYSTEM		
Mowing area in m ² /h	950	950
Cutting deck (material)	Steel	Steel
Cutting width	53 cm / 21"	53 cm / 21"
Cutting options	4-in-1	4-in-1
Cutting height adjustment	6 positions/central	6 Individual front/central rear
Cutting height (min–max)	28–92 mm	28–92 mm
Grass bag	Standard	Standard
Mulch Kit (Product code)	Standard	Standard
Side discharge	Standard	Standard
Rear discharge without collector	Standard	Standard
BAGGING		
Grass bag type	Soft bag with hard top	Soft bag
Grass bag capacity	70 l	70 l
Bag full indicator	Standard	-
WHEELS		
Wheels (F/R)	200 mm / 280 mm (8"/11")	180 mm / 200 mm (7"/8")
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	MySpeed	Ergonomic
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	-	-
DIMENSIONS		
LpA/LwA/LwAg (dB)	86/96/98	86/96/98
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	162 cm / 58 cm / 114 cm	167 cm / 57 cm / 104 cm
Net weight	41 kg	37 kg
Model number	12BCPVS7603	12AQC6J4603
EAN	 4 008423 866155	 4 008423 858204

THE BEST CUB CADET MOWERS ON THE MARKET

XM

ENDURO SERIES™

—3T— *Cub Cadet* — TECHNOLOGY

A DISCHARGE CHUTE FOR EXCELLENT GRASS COLLECTION

- Mower housing with specially designed geometry
- Cuttings are transported to the grass bag
- Improved mowing performance

1 A CHOICE OF AVAILABLE TRANSMISSION TYPES



- **Single Speed**
(XM1 DR46, XM1 ER53)



- **VarioSpeed** – 6 speeds,
perfect for any setting.
(XM2 DR46, XM2 ER53e)



- **MySpeed™ EVO** – automatically
adjusts to your walking speed.
The maximum speed can be
preset using a range of detents.
(XM2 DR46s)



- **Variable drive** – Stepless speed
via controller (XM3 ER53)



AVS ANTI-VIBRATION SYSTEM

Special axle dampers above the deck absorb vibrations from the engine.

**BEST
IN
CLASS**

- 2 GRASS BAG (65/75/80 LITRES) WITH FULL INDICATOR & DUST COVER
- 3 EASILY ADJUSTABLE BAR HEIGHT
- 4 COMFORTABLE CENTRAL 6-STEP CUTTING HEIGHT ADJUSTMENT

- 5 HANDLE FEATURING MARKET-LEADING ERGONOMIC DESIGN – MINIMAL EFFORT REQUIRED
- 6 ELECTRIC START AT THE TOUCH OF A BUTTON (XM2 ER53e)
- 7 **3-in-1** STANDARD: REAR DISCHARGER, COLLECTING AND MULCHING OPTION

1
LAWNMOWERS



POWERFUL ENGINES WITH LARGE DISPLACEMENT

Cub Cadet ENGINES One XM2 mower and all XM1 mowers come complete with powerful Cub Cadet engines (159 and 196 ccm respectively) that extend the service life and perform outstandingly, particularly on tall grass.

HONDA ENGINE Two XM2 mowers feature Honda engines that are notably quiet and produce lower noise and vibration levels during operation.




ROBUST DESIGN AND HIGH-QUALITY COMPONENTS

The single die-cast housing is extremely robust: there are no screws that can come loose. Tough front and side bumpers protect the mower from obstacles.



FAST CLEANING

An integrated mowing deck washing nozzle and a special cleaning position mean raising, rinsing and cleaning the body couldn't be easier.

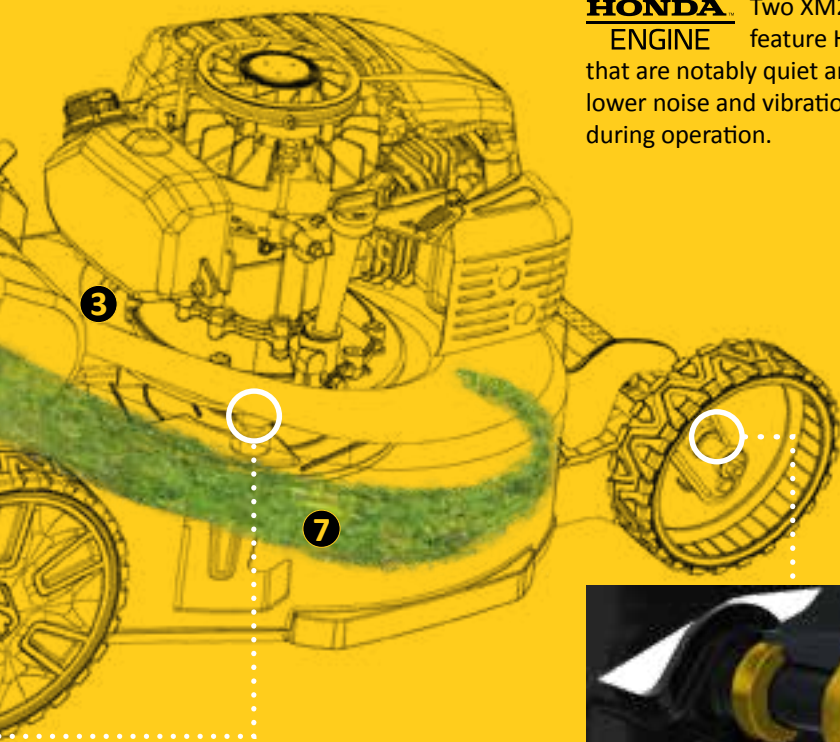

TOP-QUALITY WHEELS, EACH WITH DOUBLE BALL BEARINGS



ULTRA-ROBUST WHEELS FOR OPTIMAL RUNNING PERFORMANCE AND DURABILITY

Cub Cadet[®]

XM1
ENDURO SERIES[™]



UNDERPINNING THE VERY BEST RESULTS

The new XM1 lawnmowers in the ENDURO SERIES break new ground when it comes to power, performance and precision. The premium aluminium decks are durable and easy to clean with smooth, balanced engines delivering exceptional performance with minimal vibrations. The XM1 lawnmowers benefit from Cub Cadet 3T Technology, ensuring perfect mowing results cut after cut, season after season.

Innovative functionality combined with modern design and exceptional performance, the XM1 range of lawnmowers offer mowing perfection.



TURBO TUNNEL

— 3T — *Cub Cadet* — **TECHNOLOGY**

A specially developed geometry inside the mower housing ensures all cuttings are transported through a **turbo tunnel** into the grass bag, improving mowing performance.

1

LAWNMOWERS

XM1 FEATURES:



FAST CLEANING

The mower stands firmly when turned over for easy access to the blades and mowing deck. The integrated mowing deck washing nozzle cleans the housing.



AVS ANTI-VIBRATION SYSTEM

Super-low vibration thanks to the axle with special shock absorbers and an anti-vibration ring between the mowing deck and engine.



POWERFUL CUB CADET ENGINE

Delivers the power needed for easier and faster mowing. Ultra durable engines offer unrivalled performance, especially on long grass.



3-in-1
POWERED BY
Cub Cadet

XM1 DR46

Cutting width:	46 cm / 18"
Mowing area:	750 m ² /h
Grass bag capacity:	65 l
Engine:	Cub Cadet 55 OHV, Pull starter
Engine displacement:	159 cm ³
Drive:	Single Speed
Cutting height adjustment:	6 positions/central
Model number:	12A-YAKC603



3-in-1
POWERED BY
Cub Cadet

XM1 ER53

Cutting width:	53 cm / 21"
Mowing area:	950 m ² /h
Grass bag capacity:	75 l
Engine:	Cub Cadet 65 OHV, Pull starter
Engine displacement:	196 cm ³
Drive:	Single Speed
Cutting height adjustment:	6 positions/central
Model number:	12A-ZAJ4603

Cub Cadet[®]

XM2
ENDURO SERIES™



EVERYTHING A POWER MOWER NEEDS

The Cub Cadet XM2 lawnmower offers you the best of all worlds, incorporating VarioSpeed and MySpeed™ EVO technology.

Cub Cadet VARIOSPEED

XM ENDURO SERIES lawnmowers with VarioSpeed offer a wheel drive with six speed steps, so the speed adjusts perfectly to any situation.

MYSPEED EVO

The XM2 DR46s automatically adjusts to your walking speed. The maximum speed can also be preset.



1

LAWNMOWERS

XM2 FEATURES:



ROBUST DESIGN AND HIGH-QUALITY COMPONENTS

The single die-cast aluminium housing is ultra-robust: free of any screws that can come loose. Tough front and side bumpers protect the mower against obstacles.



POWERFUL ENGINES WITH LARGE ENGINE DISPLACEMENT

Get the power you need all the time for fast and efficient working, thanks to the powerful Cub Cadet engine or the smooth Honda engines.



ELECTRIC STARTER

The XM2 ER53e engine starts easily at a push of a button.



3-in-1
HONDA
ENGINE

XM2 DR46

Cutting width:	46 cm / 18"
Mowing area:	750 m ² /h
Grass bag capacity:	65 l
Engine:	Honda GCV 160, Pull starter
Engine displacement:	160 cm ³
Drive:	VarioSpeed
Cutting height adjustment:	6 positions/central
Model number:	12AQYADQ603



3-in-1
HONDA
ENGINE
MYSPEED EVO

XM2 DR46s

Cutting width:	46 cm / 18"
Mowing area:	750 m ² /h
Grass bag capacity:	65 l
Engine:	Honda GCV 160, Pull starter
Engine displacement:	160 cm ³
Drive:	MySpeed EVO
Cutting height adjustment:	6 positions/central
Model number:	12ABYADQ603



3-in-1
POWERED BY
Cub Cadet

XM2 ER53e

Cutting width:	53 cm / 21"
Mowing area:	950 m ² /h
Grass bag capacity:	75 l
Engine:	Cub Cadet 65 OHV ES, electric starter
Engine displacement:	196 cm ³
Drive:	VarioSpeed
Cutting height adjustment:	6 positions/central
Model number:	12ARZA9A603

Cub Cadet[®]

XM3

ENDURO SERIES™



NEW

3-in-1

Powered by
Kawasaki

XM3 ER53

Cutting width:	53 cm / 21"
Mowing area:	950 m ² /h
Grass bag capacity:	80 l
Engine:	Kawasaki FJ 180 V KAI, Pull starter
Engine displacement:	179 cm ³
Drive:	Variable drive
Cutting height adjustment:	6 positions/central
Model number:	12AQZBK2603

OUR TOP MODEL FOR EFFICIENT MOWING

The Cub Cadet XM3 delivers everything you would expect; exceptional mowing performance, high efficiency, easy handling and a professional appearance. High performance comes from the powerful Kawasaki engine that gets more output than you'd expect from every cubic cm of engine displacement.

The blade-brake clutch allows the engine to keep running even when the blade is disengaged, so you don't have to restart the engine every time.

The XM3 is ideal for professional use and makes short work of even large lawns by combining strength and efficiency.



BLADE-BRAKE CLUTCH (BBC)

This feature can be used to keep the engine running with the mowing deck switched off, providing safety when emptying the grass bag and saving time because there's no need to restart the engine.



HEAVY DUTY TRANSMISSION

Transmission with aluminium housing for durability.




STEEL RIMS

Supported by ball bearings the steel rims improve the running quality and give higher stability.



POWERFUL ENGINE

The professional Kawasaki FJ 180 V Kai engine with a high torque of up to 10 is equipped with a pressure lubrication system, enabling you to negotiate slopes of up to 30°.



2-in-1



XM3 KR84es

Cutting width:	84 cm / 33"
Mowing area:	2,000 m ² /h
Ejection type:	Side discharge
Engine:	B&S 3105 Series, electric starter
Engine displacement:	344 cm ³
Drive:	Variable drive
Cutting height adjustment:	8 positions/central
Model number:	12AE764U603

STRONG FEATURES, EASY OPERATION

The Cub Cadet XM3 KR84es is not just a regular lawnmower. It's a large-area mower. Thanks to the extremely large cutting width and high-performance engine, you can easily mow a large area in a short time. A combination of strength and efficiency makes your work easy.

You'll find incredible strength in its powerful engine. You'll experience ultimate efficiency thanks to an 84 cm (33") steel cutting deck and zero-turn manoeuvrability.

The variable four speed system allows you to set your speed based on the environment and personal preference. Front caster wheels enable easy manoeuvrability, while large rear pneumatic wheels grip the ground for superior traction over uneven terrain.



HIGH-PERFORMANCE ENGINE

The reliable B&S OHV E-Start engine provides enough power even for long grass and on inclines.



LARGE PETROL TANK WITH A CAPACITY OF 7.5 L

Longer mowing times due to less fuel consumption.



ELECTRIC STARTER

Starts the engine comfortably at the turn of a key.



ZERO-TURNING CIRCLE

Swivelling front caster wheels and pneumatic rear wheels.



CENTRAL CUTTING HEIGHT SETTING

The cutting height can be adjusted in eight stages from 25–100 mm using a single lever.



WIDE CUT DECK

84 cm / 33" steel wide cut deck with 2-in-1 option.

XM1 DR46

XM1 ER53

ENGINE		
Engine type	Cub Cadet 55 OHV	Cub Cadet 65 OHV
Engine displacement	159 cm ³	196 cm ³
Rated power	2.5 kW / 2,800 min ⁻¹	3.3 kW / 2,800 min ⁻¹
Engine start	Pull starter	Pull starter
Tank volume (capacity)	1.0 l	1.0 l
DRIVE SYSTEM		
Drive	Single Speed	Single Speed
Number of speeds	1	1
Speed (max)	3.6 km/h	3.6 km/h
CUTTING SYSTEM		
Mowing area in m ² /h	750	950
Cutting deck (material)	Aluminium	Aluminium
Cutting width	46 cm / 18"	53 cm / 21"
Cutting options	3-in-1	3-in-1
Cutting height adjustment	6 positions/central	6 positions/central
Cutting height (min-max)	20-90 mm	20-90 mm
Grass bag	Standard	Standard
Mulch Kit (Product code)	-	-
Side discharge	-	-
Rear discharge without collector	Standard	Standard
BAGGING		
Grass bag type	Soft bag with dustblocker	Soft bag with dustblocker
Grass bag capacity	65 l	75 l
Bag full indicator	Standard	Standard
WHEELS		
Wheels (F/R)	200 mm / 240 mm (8"/10")	200 mm / 240 mm (8"/10")
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	Ergonomic	Ergonomic
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	-	-
DIMENSIONS		
LpA/LwA/LwAg (dB)	84/94/96	86/96/98
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	117 cm / 53 cm / 50 cm	117 cm / 60 cm / 50 cm
Net weight	42 kg	45 kg
Model number	12A-YAKC603	12A-ZAJ4603
EAN	 4 008423 882049	 4 008423 882070



XM2 DR46

XM2 DR46s


ENGINE		
Engine type	Honda GCV 160	Honda GCV 160
Engine displacement	160 cm ³	160 cm ³
Rated power	2.8 kW / 2,800 min ⁻¹	2.8 kW / 2,800 min ⁻¹
Engine start	Pull starter	Pull starter
Tank volume (capacity)	1.0 l	1.1 l
DRIVE SYSTEM		
Drive	VarioSpeed	MySpeed EVO
Number of speeds	6 forward	1
Speed (max)	2.8-4.5 km/h	2.8-4.5 km/h
CUTTING SYSTEM		
Mowing area in m ² /h	750	750
Cutting deck (material)	Aluminium	Aluminium
Cutting width	46 cm / 18"	46 cm / 18"
Cutting options	3-in-1	3-in-1
Cutting height adjustment	6 positions/central	6 positions/central
Cutting height (min-max)	20-90 mm	20-90 mm
Grass bag	Standard	Standard
Mulch Kit (Product code)	-	-
Side discharge	-	-
Rear discharge without collector	Standard	Standard
BAGGING		
Grass bag type	Soft bag with dustblocker	Soft bag with dustblocker
Grass bag capacity	65 l	65 l
Bag full indicator	Standard	Standard
WHEELS		
Wheels (F/R)	200 mm / 240 mm (8"/10")	200 mm / 240 mm (8"/10")
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	Ergonomic	MySpeed EVO
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	-	-
DIMENSIONS		
LpA/LwA/LwAg (dB)	84/94/96	84/94/96
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	117 cm / 53 cm / 50 cm	117 cm / 53 cm / 50 cm
Net weight	46 kg	43 kg
Model number	12AQYADQ603	12ABYADQ603
EAN	 4 008423 882094	 4 008423 882087

XM2 ER53e

XM3 ER53

ENGINE		
Engine type	Cub Cadet 65 OHV ES	Kawasaki FJ 180 V KAI
Engine displacement	196 cm ³	179 cm ³
Rated power	3.3 kW / 2,550 min ⁻¹	4.5 kW / 2,800 min ⁻¹
Engine start	Electric	Pull starter
Tank volume (capacity)	1.1 l	1.6 l
DRIVE SYSTEM		
Drive	VarioSpeed	Variable drive
Number of speeds	6 forward	Stepless
Speed (max)	3.2–5.3 km/h	–
CUTTING SYSTEM		
Mowing area in m ² /h	950	950
Cutting deck (material)	Aluminium	Aluminium
Cutting width	53 cm / 21"	53 cm / 21"
Cutting options	3-in-1	3-in-1
Cutting height adjustment	6 positions/central	6 positions/central
Cutting height (min–max)	20–90 mm	20–90 mm
Grass bag	Standard	Standard
Mulch Kit (Product code)	-	-
Side discharge	-	-
Rear discharge without collector	Standard	Standard
BAGGING		
Grass bag type	Soft bag with dustblocker	Soft bag with dustblocker
Grass bag capacity	75 l	80 l
Bag full indicator	Standard	Standard
WHEELS		
Wheels (F/R)	200 mm / 240 mm (8"/10")	200 mm / 240 mm (8"/10")
Double ball bearings	Standard	Standard
COMFORT		
Washing nozzle	Standard	Standard
Handle type	Ergonomic	Ergonomic
Foldable handle	Standard	Standard
Height adjustable handle	Standard	Standard
Handle covering	-	-
DIMENSIONS		
LpA/LwA/LwAg (dB)	86/96/98	86/96/98
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	117 cm / 60 cm / 50 cm	117 cm / 60 cm / 50 cm
Net weight	48 kg	57 kg
Model number	12ARZA9A603	12AQZBK2603
EAN	 4 008423 882117	 4 008423 891966

XM3 KR84es

ENGINE	
Engine type	B&S 3105 Series
Engine displacement	344 cm ³
Rated power	6.5 kW / 2,900 min ⁻¹
Engine start	Electric
Tank volume (capacity)	7.5 l
DRIVE SYSTEM	
Drive	Variable drive
Number of speeds	4 forward/1 reverse
Speed (max)	–
CUTTING SYSTEM	
Mowing area in m ² /h	2,000
Cutting deck (material)	Steel
Cutting width	84 cm / 33"
Cutting options	2-in-1
Cutting height adjustment	8 positions/central
Cutting height (min–max)	25–100 mm
Grass bag	–
Mulch Kit (Product code)	–
Side discharge	Standard
Rear discharge without collector	–
BAGGING	
Grass bag type	–
Grass bag capacity	–
Bag full indicator	–
WHEELS	
Wheels (F/R)	200 mm / 400 mm (8"/16")
Double ball bearings	Standard
COMFORT	
Washing nozzle	Standard
Handle type	Standard
Foldable handle	Standard
Height adjustable handle	–
Handle covering	Standard
DIMENSIONS	
LpA/LwA/LwAg (dB)	88/98/100
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²
Dimensions (L/W/H)	170 cm / 112 cm / 106 cm
Net weight	154 kg
Model number	12AE764U603
EAN	 4 008423 835243





COMPACT AND VERSATILE LIKE NEVER BEFORE

MINI-RIDERS

The Cub Cadet Mini-Riders deliver the same strength, durability and perfect cut as our larger lawn tractors, just in a more compact design. Plus, you have the choice between two models with transmatic and three models with hydrostatic drive. The Cub Cadet Mini-Riders are more than just compact, they are comfortable, convenient and unmatched in quality.

LR1 FORCE SERIES

200 LITRE GRASS BAG

A 200 litre grass bag bag (models LR1 MR76 and LR2 NR76) with dust protection cover, two grips and fill indicator, which can be emptied from the driver's seat.

4.9 LITRE FUEL TANK

The large fuel tank with fuel indicator gives you the freedom to mow your lawn in a full cycle with no refuelling needed.



LARGE TYRES

Lawn-friendly, yet handy, even on uneven terrain.

STEP-THROUGH FRAME

For easy access with soft rubber foot pads and a comfortable foot rest.

CUTTING HEIGHT ADJUSTMENT & PTO CLUTCH

The cutting height can easily be adjusted through five positions from 38 mm to 95 mm and with the individual deck clutch lever the cutting deck can be switched on and off. Both levers are conveniently located on the right side of the seat.

COMPACT AND VERSATILE LIKE NEVER BEFORE

Modern design, versatility and comfortable mowing – just three of the many reasons to choose a Cub Cadet MINI-RIDER. The compact and manoeuvrable Cub Cadet MINI-RIDER mowers with electric start are equipped with powerful and low-maintenance Cub Cadet or Briggs & Stratton engines.

Thanks to their space-saving design, these Cub Cadet MINI-RIDER models are almost as compact as a conventional walk behind mower in terms of garage space.

The MINI-RIDER also allows you to collect, discharge or mulch your grass clippings.

2

MINI-RIDERS



TRANSMATIC TRANSMISSION

The transmatic transmission allows shift-on-the-go speed control. Simply choose your driving direction, set the desired basic speed and start mowing.

On the Cub Cadet MINI-RIDER LR1 models, select between six forward and six reverse speeds.



76 CM / 30" MOWING DECK

Selectable collecting, mulching and discharge options come as standard with model LR1 MR76. The LR1 MS76 model offers mulching and side discharge options.

Superior mulching, excellent collection and side discharge for spreading. Whatever you choose, our MINI-RIDERS can handle it.

3-in-1

POWERED BY
Cub Cadet



LR1 MR76

Cutting width:	76 cm / 30"
Mowing area:	2,500 m ² /h
Grass bag capacity:	Standard 200 l
Engine:	Cub Cadet OHV
Engine displacement:	382 cm ³
Drive:	Transmatic
Cutting height adjustment:	5 positions
Model number:	13A726HD603

3-in-1
OPTION

POWERED BY
Cub Cadet



LR1 MS76

Cutting width:	76 cm / 30"
Mowing area:	3,000 m ² /h
Grass bag capacity:	Optional 115 l
Engine:	Cub Cadet OHV
Engine displacement:	382 cm ³
Drive:	Transmatic
Cutting height adjustment:	5 positions
Model number:	13A726JD603

Cub Cadet[®]

LR2
FORCE SERIES



THE SIZE YOU NEED WITH THE POWER YOU WANT

The new Cub Cadet MINI-RIDER LR2 delivers all the strength, durability and cutting performance of larger rider models; but in a more compact design.

Premium hydrostatic transmission and the exclusive steering wheel system gives you optimum control while in operation.



INTELLIGENT PARKING ASSISTANCE (IPA)

The brand new IPA system makes parking your LR2 in your garage or shed easier. The intelligent system halves the speed of your MINI-RIDER, for reversing more safely and precisely.

RevTEK™ TECHNOLOGY

RevTEK™ – Reverse Mowing Technology: is an ingenious system giving you the ability to mow in reverse when required (except the LR2 FR60).



HYDROSTATIC DRIVE SYSTEM

The LR2 comes complete with a top-quality hydrostatic drive system. With the parking brake on the left and a one-pedal foot control on the right.



SUPER GRIP PEDALS

Under challenging conditions, the super grip pedals provide maximum grip for safe driving.



LIGHTS






LED lights for safer operation at dawn (except the LR1 MR76, LR1 MS76 and LR2 FR60).



TELESCOPIC STEERING COLUMN

With a soft grip steering wheel for maximum comfort, the steering shaft is height-adjustable to suit operators of any height (except the LR2 FR60).

MINI-RIDER ACCESSORIES

MULCH KIT/DEFLECTOR			
	Mulch Kit/Deflector incl. blades for 76 cm / 30" decks		Mod. no.: 196-334-600
	Mulch Kit/Deflector incl. blades for 60 cm / 24" decks		Mod. no.: 196-707-678
TWIN BAGGER			
	115 litres, for 76 cm / 30" decks		Mod. no.: 19A30014OEM



LR2 FR60

Cutting width:	60 cm / 24"
Mowing area:	1,500 m ² /h
Grass bag capacity:	Standard 150 l
Engine:	Briggs & Stratton
Engine displacement:	224 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13AW21SC603



LR2 NR76

Cutting width:	76 cm / 30"
Mowing area:	2,500 m ² /h
Grass bag capacity:	Standard 200 l
Engine:	Cub Cadet OHV
Engine displacement:	420 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13B221HD603



LR2 NS76

Cutting width:	76 cm / 30"
Mowing area:	3,000 m ² /h
Grass bag capacity:	Optional 115 l
Engine:	Cub Cadet OHV
Engine displacement:	420 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13A221JD603

LR1 MR76



LR1 MS76

ENGINE		
Engine type	Cub Cadet OHV	Cub Cadet OHV
Engine displacement	382 cm ³	382 cm ³
Rated power	8.2 kW / 2,800 min ⁻¹	7.3 kW / 2,650 min ⁻¹
Cylinders	Single	Single
Tank volume (capacity)	4.9 l	4.9 l
Lubrication	Fully pressurised automotive-style oil pump with spin-on oil filter	Fully pressurised automotive-style oil pump with spin-on oil filter
DRIVE SYSTEM		
Transmission	Transmatic	Transmatic
Speeds	6 (f/r), shift-on-the-go	6 (f/r), shift-on-the-go
Control	Foot pedal control	Foot pedal control
CUTTING SYSTEM		
Mowing area in m ² /h	2,500	3,000
Cutting width	76 cm / 30"	76 cm / 30"
Cutting height (min-max)	38-95 mm	38-95 mm
Cutting options	3-in-1	3-in-1 option
Number of blades	1	1
Deck engagement	Manual lever control	Manual lever control
Deck height positions	5	5
Wash nozzle/Mulch Kit	Standard/Standard	Standard/Standard
DISCHARGE SYSTEM		
Bag (capacity)/accessory no.	Standard 200 l/-	Optional 115 l/(19A30014OEM)
Bag lever/Hardtop	2 grips/plastic	-/-
Bag full indicator/grass deflector	Standard/Standard	-/Standard
FRAME		
Front axle	Steel	Steel
Front bumper	Standard	-
Turning circle	46 cm / 18"	46 cm / 18"
Wheel size (f/r)	13" x 5" / 16" x 6.5"	13" x 5" / 16" x 6.5"
Wheel bearings	Sleeve bearings	Sleeve bearings
Easy entry frame	Standard	Standard
WHEELS		
Battery	12 V wet battery 115 CCA	12 V wet battery 115 CCA
Headlights	-	-
COMFORT		
Seat type	Comfort Seat	Comfort Seat
Seat adjustment	Screw	Screw
Steering wheel	Comfort	Comfort
Mow in reverse (RevTEK™)	-	-
Battery charger (Part number)	196-967-678	196-967-678
DIMENSIONS		
LpA/LwA/LwAg (dB)	88/98/100	88/98/100
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	225 cm / 86 cm / 112 cm	157 cm / 85 cm / 112 cm
Net weight	145 kg	127 kg
Model number	13A726HD603	13A726JD603
EAN	 4 008423 892284	 4 008423 892154

LR2 FR60

LR2 NR76

LR2 NS76

ENGINE			
Engine type	Briggs & Stratton 1000 Series	Cub Cadet OHV	Cub Cadet OHV
Engine displacement	224 cm ³	420 cm ³	420 cm ³
Rated power	4.5 kW / 2,800 min ⁻¹	8.2 kW / 2,500 min ⁻¹	8.2 kW / 2,650 min ⁻¹
Cylinders	Single	Single	Single
Tank volume (capacity)	1.2 l	4.9 l	4.9 l
Lubrication	Fully pressurised automotive-style oil pump with spin-on oil filter	Fully pressurised automotive-style oil pump with spin-on oil filter	Fully pressurised automotive-style oil pump with spin-on oil filter
DRIVE SYSTEM			
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable	Infinitely variable	Infinitely variable
Control	Foot pedal control	Foot pedal control	Foot pedal control
CUTTING SYSTEM			
Mowing area in m ² /h	1,500	2,500	3,000
Cutting width	60 cm / 24"	76 cm / 30"	76 cm / 30"
Cutting height (min-max)	38-95 mm	38-95 mm	38-95 mm
Cutting options	3-in-1 option	3-in-1	3-in-1 option
Number of blades	1	1	1
Deck engagement	Manual lever control	Manual lever control	Manual lever control
Deck height positions	5	5	5
Wash nozzle/Mulch Kit	-/Optional (196-707-678)	Standard/Standard	Standard/Standard
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	Standard 150 l/-	Standard 200 l/-	Optional 115 l/(19A30014OEM)
Bag lever/Hardtop	1 grip	2 grips/plastic	-/-
Bag full indicator/grass deflector	-/Optional	Standard/Standard	-/Standard
FRAME			
Front axle	Steel	Steel	Steel
Front bumper	Standard	Standard	-
Turning circle	46 cm / 18"	46 cm / 18"	46 cm / 18"
Wheel size (f/r)	13" x 5" / 16" x 6.5"	13" x 5" / 16" x 6.5"	13" x 5" / 16" x 6.5"
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Easy entry frame	Standard	Standard	Standard
WHEELS			
Battery	12 V wet battery 4 Ah	12 V wet battery 115 CCA	12 V wet battery 115 CCA
Headlights	-	LED	LED
COMFORT			
Seat type	Deluxe High Comfort Seat	Deluxe High Comfort Seat	Deluxe High Comfort Seat
Seat adjustment	Screw	Screw	Screw
Steering wheel	Standard	Comfort	Comfort
Mow in reverse (RevTEK™)	-	Standard	Standard
Battery charger (Part number)	-	196-967-678	196-967-678
DIMENSIONS			
LpA/LwA/LwAg (dB)	86/96/98	88/98/100	88/98/100
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	192 cm / 83 cm / 112 cm	225 cm / 86 cm / 112 cm	157 cm / 85 cm / 112 cm
Net weight	189 kg	172 kg	127 kg
Model number	13AW21SC603	13B221HD603	13A221JD603
EAN	 4 008423 883374	 4 008423 875508	 4 008423 872385



A photograph of two yellow Cub Cadet lawn tractors parked on a grassy area with trees in the background. The sun is shining through the trees on the left, creating a lens flare effect. A large, dark, semi-transparent triangular graphic is overlaid on the right side of the image, containing the product logos and main text.

LT

FORCE SERIES

XT

ENDURO SERIES™

COMFORT AND EFFICIENCY PERFECTLY COMBINED

LAWN TRACTORS

Cub Cadet lawn tractors deliver the perfect mowing experience, cut after cut, season after season.

Equipped with powerful engines and built on durable strong steel frames with hard-wearing components, Cub Cadet lawn tractors are made to work. Our line up of lawn tractors have been ergonomically designed for user comfort, honed to ensure incredibly responsive handling and made to deliver exceptional cut and collecting performance.

Power, strength, comfort and efficiency in every detail!

Cub Cadet[®]

LT
FORCE SERIES



LT LAWN TRACTORS, A STEP UP IN POWER AND PERFORMANCE.

With a lawn tractor from the FORCE SERIES, mowing lawns becomes an even more efficient and effective gardening experience. The decks on lawn tractors are typically six inches wider than those found on Mini-Riders and over 16" wider in comparison to a regular lawnmower. With a wider cutting deck and more powerful engines not only can you cut more, but you can mow at a speed which is 2 – 3 times faster, saving you time and effort.

Cub Cadet LT lawn tractors are extraordinarily versatile. They excel when it comes to covering large areas quickly thanks to the oversized grass bag. The side discharge, eliminates the need to stop and empty the bag. Thanks to the user-friendly cutting height adjustment, the LT Series achieves optimum cutting results – even on difficult ground.

The LT lawn tractors deliver perfect mowing performance, exceptional cutting and bagging with incredibly responsive handling.

3**LAWN TRACTORS**

DRIVE SYSTEMS



TRANSMATIC TRANSMISSION

Allows shift-on-the-go speed control. Simply choose the driving direction, set the desired basic speed with the speed shift lever on the dashboard and release the brake/clutch pedal. Push the pedal to slow down or press it all the way forward to stop. Releasing the brake pedal automatically brings the tractor back to your preset speed.



HYDROSTATIC TRANSMISSION

Impressive with its modern technology and featuring a self-lubricating hydro pump for minimum maintenance and maximum durability. The hydrostatic transmission stands out for its velocity control as well as continual forward and reverse speeds. No clutching or shifting is required which means you can drive more gently with greater accuracy. The LT lawn tractors are controlled by either a hand lever (side discharge tractors) or a foot pedal (rear discharge tractors).

LT1 FORCE SERIES

COMFORTABLE SEAT WITH HIGH BACKREST FOR ALL LT MODELS

Mow frequently? For many hours? Then you know how important it is to sit comfortably. The high backrest supports an upright posture, making it far more comfortable.



COMFORT STEERING WHEEL

A 3-spoke soft grip steering wheel is standard on all our tractors.



CUTTING HEIGHT ADJUSTMENT

5-position height adjustment to easily change the cutting height (30–95 mm).



CENTRAL REAR DISCHARGE

Our rear discharge tractors are designed to transport grass clippings into the grass bag with optimal efficiency. All LT Series rear discharge models feature a grass bag made of durable fabric for flexibility and have an air passage to guarantee air flow and perfect collection. The hard top controls dust and reduces noise. The telescopic handle allows you to empty the grass bag from the driver's seat.



PRECISE STEERING SYSTEM

Our precision gear-steering technology supports operators at work and makes your powerful Cub Cadet lawn tractor even more efficient and surprisingly easy to manoeuvre.



STEEL FRAME

All tractor frames are made of fully welded and powder-coated rugged steel, for added durability.



FLOATING STEEL OR CAST IRON FRONT AXLE

Keeping all four wheels on the ground, however uneven the surface.



ONE-PIECE BONNET

The entire engine bonnet can be removed within seconds without the need for tools, allowing for easy maintenance.

UK SPECIAL EDITION



LT1 NR76

Cutting width:	76 cm / 30"
Mowing area:	2,500 m ² /h
Grass bag capacity:	200 l
Engine:	Cub Cadet OHV
Engine displacement:	420 cm ³
Drive:	Transmatic
Cutting height adjustment:	5 positions
Model number:	13H276DC603

3-in-1 OPTION



LT1 NR92

Cutting width:	92 cm / 36"
Mowing area:	3,500 m ² /h
Grass bag capacity:	240 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm ³
Drive:	Transmatic
Cutting height adjustment:	5 positions
Model number:	13AB76DE603

3-in-1 OPTION



LT1 NS96

Cutting width:	96 cm / 38"
Mowing area:	4,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet OHV
Engine displacement:	439 cm ³
Drive:	Transmatic
Cutting height adjustment:	5 positions
Model number:	13AB76DF603

LT2

FORCE SERIES

LT3

FORCE SERIES



3-in-1
OPTION

POWERED BY
Cub Cadet



LT2 NR92

Cutting width:	92 cm / 36"
Mowing area:	3,500 m ² /h
Grass bag capacity:	240 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13AB71DE603



LT1 and LT2 lawn tractors are equipped with a powerful and reliable Cub Cadet engine, developed in the USA.

LT3 lawn tractors are fitted with a Briggs & Stratton V-Twin Intek engine with reduced emissions.



LEATHER-LOOK NEW STEERING WHEEL

High-quality sheath for secure grip. Available on the **LT3 PR105** and **LT3 PS107**.

RevTEK™ TECHNOLOGY

Reverse mowing technology. Allows you to cut while in reverse. Available on the **LT3 PR105** and **LT3 PS107**.

COMFORTABLE SEAT WITH HIGH BACKREST ON ALL LT MODELS.

HYDROSTATIC TRANSMISSION
Ensures a smooth and exacting drive.



LT2 NS96

Cutting width:	96 cm / 38"
Mowing area:	4,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet OHV
Engine displacement:	439 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13AB79DF603



LT3 PR105

Cutting width:	105 cm / 41"
Mowing area:	4,500 m ² /h
Grass bag capacity:	240 l
Engine:	B&S Intek, V-TWIN dual cylinder
Engine displacement:	656 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13HT71DN603



LT3 PS107

Cutting width:	107 cm / 42"
Mowing area:	5,500 m ² /h
Grass bag capacity:	200 l optional
Engine:	B&S Intek, V-TWIN dual cylinder
Engine displacement:	656 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Model number:	13HT79DG603

LT1 NR76

LT1 NR92

LT1 NS96



LT2 NR92

ENGINE				
Engine type	Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV
Engine displacement	420 cm ³	439 cm ³	439 cm ³	439 cm ³
Rated power	7.0 kW / 2,500 min ⁻¹	9.0 kW / 2,750 min ⁻¹	9.0 kW / 2,800 min ⁻¹	9.0 kW / 2,600 min ⁻¹
Cylinders	Single	Single	Single	Single
Tank volume (capacity)	3.8 l	3.8 l	3.8 l	3.8 l
DRIVE SYSTEM				
Transmission	Transmatic 7 speed	Transmatic	Transmatic	Foot-hydrostatic
Speeds	7 (f/r), shift-on-the-go	6 (f/r), shift-on-the-go	6 (f/r), shift-on-the-go	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Yes	-	-	-
CUTTING SYSTEM				
Mowing area in m ² /h	2,500	3,500	4,000	3,500
Cutting width	76 cm / 30"	92 cm / 36"	96 cm / 38"	92 cm / 36"
Cutting height (min-max)	30–95 mm	30–95 mm	30–95 mm	30–95 mm
Number of blades	1	2	2	2
Deck engagement	Manual lever control	Manual lever control	Manual lever control	Manual lever control
Deck height positions	5	5	5	5
Deck wheels	-	2	2	2
Wash nozzle/Mulch Kit	-	-(196-749A678)	-(OEM-190A116)	-(196-749A678)
DISCHARGE SYSTEM				
Bag (capacity)/accessory no.	200 l/-	240 l/-	200 l optional/(OEM-190-180A)	240 l/-
Bag lever/hardtop	-/-	Telescopic handle/Plastic	-/-	Telescopic handle/Plastic
Bag full indicator/grass deflector	-/Standard	-(196-750A678)	-/Standard	-(196-750A678)
FRAME				
Front axle	Steel	Steel	Steel	Steel
Front bumper	(OEM-196B603)	(OEM-196B603)	(OEM-196B603)	(OEM-196B603)
Turning circle	46 cm / 18"	46 cm / 18"	46 cm / 18"	46 cm / 18"
Wheel size (f/r)	13" x 5" / 18" x 6.5"	15" x 6" / 18" x 9.5"	15" x 6" / 20" x 8"	15" x 6" / 18" x 9.5"
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Easy entry frame	Standard	Standard	Standard	Standard
Headlights	Standard	Standard	Standard	Standard
COMFORT				
Seat type	Medium back	High back	High back	High back
Seat adjustment	Screw	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
Steering wheel	Comfort	Standard	Standard	Soft-Grip
Toolbox/Cupholder	-/-	-/-	-/-	-/-
12 V plug	-/-	-	-	-
Mow in reverse (RevTEK™)	Standard	-	-	-
Battery charger	(196-967-678)	(196-967-678)	(196-967-678)	(196-967-678)
DIMENSIONS				
LpA/LwA/LwAg (dB)	88/98/100	88/98/100	88/98/100	88/98/100
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	225 cm / 91 cm / 103 cm	225 cm / 99 cm / 103 cm	170 cm / 107 cm / 100 cm	225 cm / 99 cm / 103 cm
Net weight	150 kg	195 kg	150 kg	195 kg
Model number	13H276DC603	13AB76DE603	13AB76DF603	13AB71DE603
EAN	4 008423 861990 >	4 008423 891829	4 008423 891836	4 008423 891812

LT2 NS96

LT3 PR105

LT3 PS107

ENGINE			
Engine type	Cub Cadet OHV	B&S Intek	B&S Intek
Engine displacement	439 cm ³	656 cm ³	656 cm ³
Rated power	9.0 kW / 2,800 min ⁻¹	10.8 kW / 2,600 min ⁻¹	12.5 kW / 2,800 min ⁻¹
Cylinders	Single	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	3.8 l	3.8 l	3.8 l
DRIVE SYSTEM			
Transmission	Hand-hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Manual lever control	Foot pedal control	Manual lever control
Cruise control	-	-	-
CUTTING SYSTEM			
Mowing area in m ² /h	4,000	4,500	5,500
Cutting width	96 cm / 38"	105 cm / 41"	107 cm / 42"
Cutting height (min-max)	30-95 mm	30-95 mm	30-95 mm
Number of blades	2	2	2
Deck engagement	Manual lever control	Manual lever control	Manual lever control
Deck height positions	5	5	5
Deck wheels	2	2	2
Wash nozzle/Mulch Kit	-(OEM-190A116)	Standard/(196-749A678)	Standard/Standard
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	200 l optional/(OEM-190-180A)	240 l/-	200 l optional/(OEM-190-180A)
Bag lever/hardtop	-/-	Telescopic handle/Plastic	-/-
Bag full indicator/grass deflector	-/Standard	-(196-750A678)	-/Standard
FRAME			
Front axle	Steel	Cast-iron	Cast-iron
Front bumper	(OEM-196B603)	Standard	Standard
Turning circle	46 cm / 18"	46 cm / 18"	46 cm / 18"
Wheel size (f/r)	15" x 6" / 20" x 8"	15" x 6" / 18" x 9.5"	15" x 6" / 20" x 8"
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Easy entry frame	Standard	Standard	Standard
Headlights	Standard	Standard	Standard
COMFORT			
Seat type	High back	High back	High back
Seat adjustment	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
Steering wheel	Soft-Grip	Leather-Look	Leather-Look
Toolbox/Cupholder	-/-	-/-	-/-
12 V plug	-	-	-
Mow in reverse (RevTEK™)	-	Standard	Standard
Battery charger	(196-967-678)	(196-967-678)	(196-967-678)
DIMENSIONS			
LpA/LwA/LwAg (dB)	88/98/100	88/98/100	88/98/100
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	170 cm / 107 cm / 100 cm	225 cm / 110 cm / 103 cm	170 cm / 115 cm / 100 cm
Net weight	150 kg	198 kg	175 kg
Model number	13AB79DF603	13HT71DN603	13HT79DG603
EAN	 4 008423 891843	 4 008423 866384	 4 008423 866391

Cub Cadet®

ENDURO SERIES™

XT

ENDURO SERIES™





**STRONG,
POWERFUL
AND AGILE.**

XT SERIES

The XT ENDURO SERIES offers strength, efficiency and effectiveness like never before. Powerful performance, agility and market leading innovations, the XT ENDURO SERIES are the best lawn tractors Cub Cadet has ever built.

Designed for ambitious garden lovers, the XT2 models boast the tightest turning circle on the market and the XT2 and XT3 models come with the Cub Cadet Bluetooth® App allowing you to review the maintenance information of your tractor on your smartphone. Differential lock on the XT3 models ensures the optimum traction on tough and sloping terrain.

Electronic fuel injection (EFI) gives you reliable performance and power with significant fuel efficiency. Setting new standards in comfort and strength the Cub Cadet EFI engine uses up to 25% less fuel versus standard carburetted engines.

Exceed your expectations.

OUR TOP 5 MARKET LEADING FEATURES!

XT ENDURO SERIES LAWN TRACTORS

1.

MARKET LEADING CUTTING, COLLECTING AND MULCHING SYSTEM

Optimise your mowing results in minimum time.



THE SMALLEST TURNING CIRCLE ON THE MARKET

Unbeatable efficiency even in confined spaces thanks to innovative TIGHT TURN XTREME Technology on all XT2 models.

2.

3.

ULTRA-STURDY, CORROSION-RESISTANT FRAME

Ultra-rigid frame for top durability.



PERFECTLY MATCHED TRANSMISSION AND ENGINE POWER

Optimal drive power and the strongest engine power in its class.


4.

5.

ULTRA-RELIABLE V-BELT DESIGN

Improved V-belt design reduces belt tension ensuring longer belt life and impressive stability.

The XT2 PS117i and XT3 QS137 tractors are also equipped with a welded fabricated mowing deck (see photo on the right).

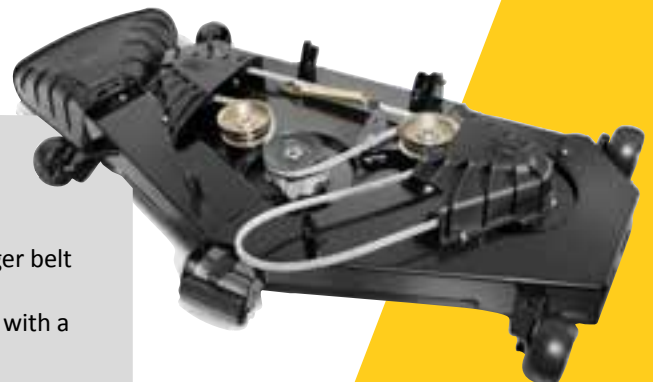



CUB CADET APP – THE SMART WAY TO STAY CONNECTED


Want to know when the next oil change is due, when the blades need to be replaced, or how many operating hours your XT lawn tractor has clocked up? Simply download the Cub Connect Bluetooth® App.




Use your smartphone to view the operating state and any maintenance information about your Cub Cadet XT2 or XT3 lawn tractor. You can even charge your phone while mowing using the multifunction socket on these models.



OPERATORS MANUAL
Direct online access to the manual for your XT lawn tractor.

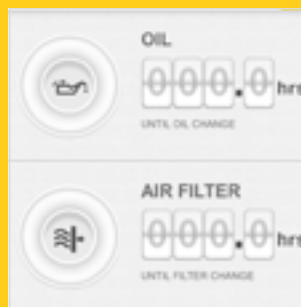

OPERATING HOUR COUNTER
The operating hour counter tells you how many hours your XT lawn tractor has worked.

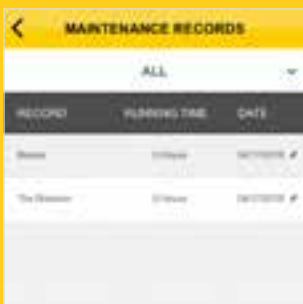

MAINTENANCE SCHEDULES
Various maintenance schedules inform you how many operating hours remain until the oil, air filter and blades need changing. You can also read off the battery charge status here.



LOCAL DEALERSHIPS
Find out where your nearest Cub Cadet dealership is and how to get there.

The Bluetooth® wordmark and logo are registered trademarks of Bluetooth SIG, Inc.

DESIGNED FOR EFFICIENCY

THE CUB CADET EFI ENGINE –

A WHOLE HOST OF BENEFITS

- Lower fuel costs (used up to 25% less than carburetor engines that deliver comparable performance) saving you both time and money when you refuel.
- Large engine displacement for miles of mowing power: 679 cm³.
- Engine no longer requires a manual choke. Simply take a seat, push the start button and get mowing.
- Improved driving characteristics (cold running performance, power consumption, no afterburning or continued running).
- Less servicing required and reduced likelihood of warranty claims thanks to direct fuel injection. No carburetor to drain, so you save on maintenance.
- Eco-friendly due to reduced emissions.
- Simple troubleshooting and diagnostic system for direct fuel injection lets dealers service models faster.

THE FOLLOWING XT MODELS FEATURE THE CUB CADET EFI ENGINE:

XT2 PR106ie, XT2 PS117i



Cub Cadet®
ENGINES

MORE GREAT FEATURES THAT MAKE MOWING EASIER

The lawn tractors in the XT ENDURO SERIES offer numerous performance features, all targeting the same goal – making mowing as fast and easy as possible. They offer an enhanced range of features including a cutting height memory cursor which displays your most frequently used and/or favorite cutting heights. A battery compartment also helps improve installation and maintenance.



GRASS BAG WITH ELECTRONIC EMPTYING

At the touch of a button, the grass bag lifts up and tips the cuttings out. Effortless, even when the bag is full. (Fitted on XT2 PR106ie & XT3 QR106e) Universal accessories are available for all XT models retrofittable from 2018.



POWERFUL BATTERY

A much longer service life ensures longer performance. Wet-cell battery with 22 Ah, so no more acid filling is required.



POWERFUL KAWASAKI V-TWIN ENGINE

A two-cylinder engine for challenging terrain. Ultra-smooth running with low fuel consumption.

XT MODELS WITH KAWASAKI V-TWIN ENGINES:

XT2 PR95, XT2 QR106, XT2 PS107, XT2 PS117, XT3 QS127, XT3 QS137, XT3 QR95, XT3 QR106e



Cub Cadet[®]



XT
ENDURO SERIES™



THE BEST TRACTORS WE HAVE EVER BUILT.

UNBEATABLE PERFORMANCE.

PURE POWER & EFFICIENCY FOR ALL CHALLENGES.

STRENGTH & QUALITY IN EVERY DETAIL.

BEST RESULTS

MAXIMUM EFFICIENCY

SOLID CONSTRUCTION

**GET MORE DONE WITH THE
XT ENDURO SERIES™**

See page 7



THE XT ENDURO SERIES™ AT A GLANCE

XT1
ENDURO SERIES™

XT2
ENDURO SERIES™

XT3
ENDURO SERIES™



MARKET LEADING CUTTING, COLLECTING AND MULCHING SYSTEM

- Thanks to the all-new grass collecting system and the rear-discharge mowing decks.
- With twice the grass-catching of previous Cub Cadet lawn tractors.
- Best direct collect rear discharge on the market.
- Push-button switch-on.

320 LITRE BAG CAPACITY

360 LITRE BAG CAPACITY

HYDROSTATIC V-BELT

HYDROSTATIC POWER TRANSMISSION

Smooth drive system – simply put your foot on the pedal and go




POWERFUL CUB CADET ENGINE
reliable and high performance engine
(XT1 OS96, XT1 OS107, XT1 OR95,
XT1 OR106)

**EFFICIENT CUB CADET
EFI V-TWIN ENGINE**
2-cylinder engine
(XT2 PR106ie, XT2 PS117i)

KAWASAKI V-TWIN ENGINE
(XT2 PR95, XT2 QR106, XT2 PS107,
XT2 PS117)

KAWASAKI V-TWIN ENGINE
2-cylinder engine for difficult terrain,
ultra-smooth running
and low fuel consumption
(XT3 QS127, XT3 QS137,
XT3 QR106e)

EASIEST STEERING SYSTEM ON THE MARKET

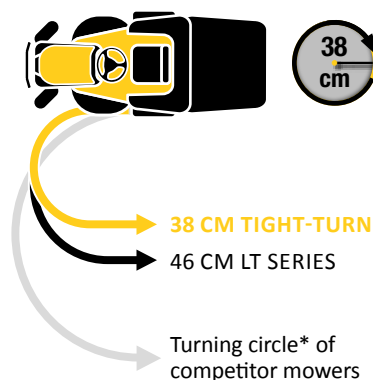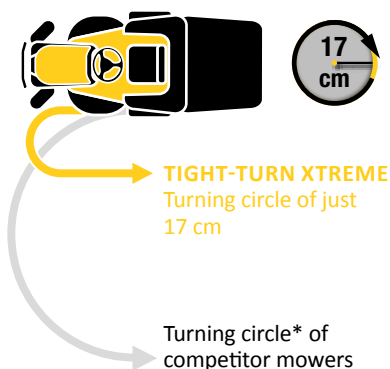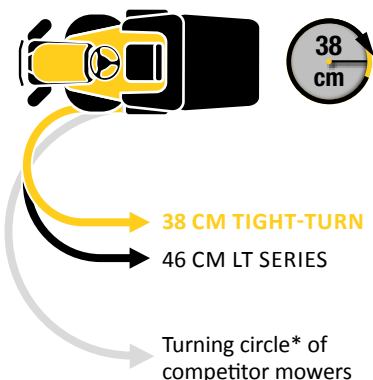

CUB CONNECT BLUETOOTH® APP

ELECTRIC GRASS BAG LIFTER for XT2 PR106ie & XT3 QR106e

KEY START

PUSH BUTTON START

SOLID, WELDED MOWING DECK for XT2 PS117i & XT3 QS137

12V MULTI-FUNCTION CHARGING SOCKET; CHARGE BATTERIES AND MOBILE DEVICES WHILE YOU DRIVE

ANTI-DUST GRASS BAG SYSTEM
AVAILABLE AS AN OPTIONAL EXTRA

ANTI-DUST GRASS BAG SYSTEM
AVAILABLE AS AN OPTIONAL EXTRA

ANTI-DUST SYSTEM
Rear discharge with multi-layer dust apron included in accessories. The apron protects against flying grass and dirt

ALL-GROUND TRACTION SYSTEM
Perfect traction even on heavy ground – thanks to mechanical differential lock

*The turning circle of a lawn tractor involves marking the position of the left rear wheel while the tractor completes a 360-degree circle (on plain ground). Now you measure the distance between the mark and the actual position of the left rear wheel again. Half this distance is the turning circle – included in all product specifications.

The Bluetooth® wordmark and logo are registered trademarks of Bluetooth SIG, Inc.

XT1™

ENDURO SERIES™



3-in-1
OPTION

POWERED BY
Cub Cadet



XT1 OS96

Cutting width:	96 cm / 38"
Mowing area:	6,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13A8A1CF603

3-in-1 OPTION

COLLECT, DISCHARGE & OPTIONAL MULCHING.

3-in-1 option means that you have the choice between collecting the clippings, or discharging them out the back. You also have the option to buy an additional mulch kit as an accessory.

UNBELIEVABLE POWER & EFFICIENCY


The Cub Cadet XT ENDURO SERIES™, part of the latest generation of lawn tractors, sets new standards for power, performance and robust quality – offering you the ultimate package. XT1 lawn tractors are ideally equipped for mowing, collecting and transporting clippings and can be expanded with a range of accessories.



DIAGONAL ADJUSTABLE SEAT
Individually adaptable – pure comfort for all users.



PUSH BUTTON BLADE START
Activate the cutting blades safely and more efficiently.



MECHANICALLY SUPPORTED CUTTING HEIGHT ADJUSTMENT
Quickly and easily select the perfect setting.



HYDROSTATIC DRIVE SYSTEM
Smooth drive system for precise mowing – simply put your foot on the pedal and go.

LAWN TRACTORS



XT1 OS107

Cutting width:	107 cm / 42"
Mowing area:	8,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13A8A1CS603



XT1 OR95

Cutting width:	95 cm / 38"
Mowing area:	5,500 m ² /h
Grass bag capacity:	320 l
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13B8A1CB603



XT1 OR106

Cutting width:	106 cm / 42"
Mowing area:	7,500 m ² /h
Grass bag capacity:	320 l
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13B8A1CR603

Cub Cadet[®]

XT2[™]
ENDURO SERIES



POWER FOR GREATER CHALLENGES

The Cub Cadet XT2 offers you an even higher level of power, control functions and durability. XT2 lawn tractors are the most agile in the XT Series and ideal for working on tough terrain, transporting and using additional accessories, whatever the season.

Cub Cadet TIGHT TURN XTREME

Just 17 cm turning circle thanks to TIGHT TURN XTREME the tightest turning radius on the market. Innovative tight turn technology delivers unsurpassed capability in tight places.



XT2 PR95

Cutting width:	95 cm / 38"
Mowing area:	6,000 m ² /h
Grass bag capacity:	320 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13BGA1CR603



XT2 QR106

Cutting width:	106 cm / 42"
Mowing area:	8,000 m ² /h
Grass bag capacity:	320 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13BFA1CR603



XT2 PR106ie

Cutting width:	106 cm / 42"
Mowing area:	8,000 m ² /h
Grass bag capacity:	320 l, electric bag lift
Engine:	EFI Cub Cadet, V-TWIN dual cylinder
Engine displacement:	679 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13BZA1CR603



XT2 PS107

Cutting width:	107 cm / 42"
Mowing area:	8,500 m ² /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13AGA1CS603



XT2 PS117

Cutting width:	117 cm / 46"
Mowing area:	9,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13AGA1CT603



XT2 PS117i

Cutting width:	117 cm / 46", welded mowing deck
Mowing area:	9,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	EFI Cub Cadet, V-TWIN dual cylinder
Engine displacement:	679 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13BZA1CN603

The Bluetooth® wordmark and logo are registered trademarks of Bluetooth SIG, Inc.

Cub Cadet[®]

XT3[™]

ENDURO SERIES[™]



MAXIMUM STRENGTH AND POWER FOR THE TOUGHEST TASKS

Designed to meet the toughest and most demanding conditions, driven by true power packages and equipped with ultra-strong components – the Cub Cadet XT3 are the ultimate lawn tractors. The XT3 range are brimming with power, capable of mowing dense grass and transporting larger loads.

Cub Cadet
ALL-GROUND TRACTION

Optimum traction, however tough the terrain – thanks to the mechanical differential lock.



GRASS BAG WITH ELECTRIC BAG LIFT

At the touch of a button, the grass bag of the XT3 QR106e lifts up and tips the cuttings out.



STRONG V-TWIN KAWASAKI ENGINE

Two-cylinder engine for demanding terrain with particularly quiet running and low fuel consumption.



LARGE GRASS BAG

Vast 360 litre capacity ensures maximum efficiency.



ANTI-DUST SYSTEM

Rear discharge with multi-layer dust apron included in the equipment protects against swirling grass and dirt.



WELDED MOWING DECK

For high durability and robustness on the XT3 QS137.



3
LAWN TRACTORS



XT3 QS127

Cutting width:	127 cm / 50"
Mowing area:	10,000 m ² /h
Grass bag capacity:	210 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	14AIA5CQ603



XT3 QS137

Cutting width:	137 cm / 54", welded mowing deck
Mowing area:	11,000 m ² /h
Grass bag capacity:	210 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	14AIA5CA603



XT3 QR106e




Cutting width:	106 cm / 42"
Mowing area:	8,000 m ² /h
Grass bag capacity:	360 l, electric bag lift
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions
Model number:	13BIA5CR603

The Bluetooth® wordmark and logo are registered trademarks of Bluetooth SIG, Inc.

XT1 OS96

XT1 OS107

XT1 OR95

ENGINE			
Engine type	Cub Cadet	Cub Cadet	Cub Cadet
Engine displacement	547 cm ³	547 cm ³	547 cm ³
Rated power	6.1 kW / 2,050 min ⁻¹	9.4 kW / 2,400 min ⁻¹	6.2kW / 2,100 min ⁻¹
Cylinders	Single	Single	Single
Tank volume (capacity)	11.4 l	11.4 l	11.4 l
DRIVE SYSTEM			
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m ² /h	6,000	8,000	5,500
Cutting width	96 cm / 38"	107 cm / 42"	95 cm / 38"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting options	3-in-1 option	3-in-1 option	3-in-1 option
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12	12	12
Deck wheels	4 rounded deck wheels	4 rounded deck wheels	4 rounded deck wheels
Wash nozzle/Mulch Kit/ mulching blade	-/Standard/Standard	Standard/Standard/Standard	Standard / (196-551-000) / (196-561-000)
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	200 l optional/(OEMR190-180A)	200 l optional/(19A30003100)	320 l / (196-555-603 Anti-Dust-System)
Bag lever/hardtop	-/-	-/-	Rounded ergo telescopic handle/ synthetic material
Bag full indicator/grass deflector	-/Standard	-/Standard	Deluxe w Blade Shutoff/196-552-000
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Single Tube	Single Tube	Single Tube
Turning circle	TIGHT TURN 38 cm / 15"	TIGHT TURN 38 cm / 15"	TIGHT TURN 38 cm / 15"
Wheel size (f/r)	15" x 6" Turf Saver / 20" x 8"	15" x 6" Turf Saver / 20" x 8"	15" x 6" Turf Saver / 18" x 9.5"
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC			
Headlights	LED	LED	LED
Bluetooth® App	-	-	-
COMFORT			
Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
12 V plug	-	-	-
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
LpA/LwA/LwAg (dB)	88/98/100	88/98/100	88/98/100
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	175 cm / 124 cm / 110 cm	175 cm / 134 cm / 110 cm	245 cm / 100 cm / 118 cm
Net weight	195 kg	195 kg	235 kg
Model number	13A8A1CF603	13A8A1CS603	13B8A1CB603
EAN	 4 008423 872224	 4 008423 872248	 4 008423 872217

XT1 OR106

XT2 PR95



XT2 QR106

ENGINE			
Engine type	Cub Cadet	Kawasaki	Kawasaki
Engine displacement	547 cm ³	603 cm ³	726 cm ³
Rated power	6.6 kW / 2,250 min ⁻¹	9.3 kW / 2,150 min ⁻¹	11.6 kW / 2,100 min ⁻¹
Cylinders	Single	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4 l	11.4 l	11.4 l
DRIVE SYSTEM			
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m ² /h	7,500	6,000	8,000
Cutting width	106 cm / 42"	95 cm / 38"	106 cm / 42"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting options	3-in-1 option	3-in-1 option	3-in-1 option
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12	12	12
Deck wheels	4 rounded deck wheels	4 rounded deck wheels	4 rounded deck wheels
Wash nozzle/Mulch Kit/ mulching blade	Standard/(196-550-000)/ (196-560-000)	Standard/(196-551-000)/ (196-561-000)	Standard/(196-550-000)/ (196-560-000)
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	320 l / (196-555-603 Anti-Dust-System)	320 l / (196-555-603 Anti-Dust-System)	320 l / (196-555-603 Anti-Dust-System)
Bag lever/hardtop	Rounded ergo telescopic handle/ synthetic material	Rounded ergo telescopic handle/ synthetic material	Rounded ergo telescopic handle/ synthetic material
Bag full indicator/grass deflector	Deluxe w Blade Shutoff/196-552-000	Deluxe w Blade Shutoff/196-552-000	Deluxe w Blade Shutoff/196-552-000
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Single Tube	Loop	Loop
Turning circle	TIGHT TURN 38 cm / 15"	TIGHT TURN XTREME 17 cm / 6.6"	TIGHT TURN XTREME 17 cm / 6.6"
Wheel size (f/r)	15" x 6" Turf Saver / 18" x 9.5"	15" x 6" Turf Saver / 18" x 9.5"	15" x 6" Turf Saver / 18" x 9.5"
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC			
Headlights	LED	LED	LED
Bluetooth® App	-	Standard	Standard
COMFORT			
Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
12 V plug	-	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
LpA/LwA/LwAg (dB)	88/98/100	88/98/100	88/98/100
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	245 cm / 110 cm / 118 cm	250 cm / 100 cm / 118 cm	250 cm / 110 cm / 118 cm
Net weight	258 kg	254 kg	253 kg
Model number	13B8A1CR603	13BGA1CB603	13BFA1CR603
EAN	 4 008423 872231	 4 008423 872279	 4 008423 872262


XT2 PR106ie

XT2 PS107

XT2 PS117

ENGINE			
Engine type	Cub Cadet EFI	Kawasaki	Kawasaki
Engine displacement	679 cm ³	603 cm ³	603 cm ³
Rated power	9.9 kW / 2,150 min ⁻¹	10.4 kW 2,250 min ⁻¹	11.8 kW / 2,600 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	9.5 l	11.4 l	11.4 l
DRIVE SYSTEM			
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m ² /h	8,000	8,500	9,000
Cutting width	106 cm / 42"	107 cm / 42"	117 cm / 46"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting options	3-in-1 option	3-in-1 option	3-in-1 option
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12	12	12
Deck wheels	4 rounded deck wheels	4 rounded deck wheels	4 rounded deck wheels
Wash nozzle/Mulch Kit/ mulching blade	Standard/(196-550-000)/ (196-560-000)	Standard/Standard/Standard	Standard/Standard/Standard
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	320 l, electric bag lift/ (Anti-Dust-System 196-555-603)	200 l optional/(19A30003100)	200 l optional/(19A30003100)
Bag lever/hardtop	Rounded ergo telescopic handle/ synthetic material	-/-	-/-
Bag full indicator/grass deflector	Deluxe w Blade Shutoff /(196-552-000)	-/Standard	-/Standard
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Loop	Loop	Loop
Turning circle	TIGHT TURN XTREME 17 cm / 6.6"	TIGHT TURN XTREME 17 cm / 6.6"	TIGHT TURN XTREME 17 cm / 6.6"
Wheel size (f/r)	15" x 6" Turf Saver / 18" x 9.5"	15" x 6" Turf Saver / 20" x 8"	15" x 6" Turf Saver / 20" x 8"
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC			
Headlights	LED	LED	LED
Bluetooth® App	Standard	Standard	Standard
COMFORT			
Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
12 V plug	Standard	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
LpA/LwA/LwAg (dB)	88/98/100	88/98/100	88/98/100
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	250 cm / 110 cm / 118 cm	180 cm / 134 cm / 110 cm	180 cm / 146 cm / 110 cm
Net weight	253 kg	210 kg	215 kg
Model number	13BZA1CR603	13AGA1CS603	13AGA1CT603
EAN	 4 008423 881899	 4 008423 872286	 4 008423 872293

XT2 PS117i

ENGINE	
Engine type	Cub Cadet EFI
Engine displacement	679 cm ³
Rated power	12.6 kW / 2,600 min ⁻¹
Cylinders	V-TWIN dual cylinder
Tank volume (capacity)	9.5 l
DRIVE SYSTEM	
Transmission	Hydrostatic
Speeds	Infinitely variable (f/r)
Control	Foot pedal control
Cruise control	Standard
CUTTING SYSTEM	
Mowing area in m ² /h	9,000
Cutting width	117 cm / 46"
Cutting height (min-max)	25–100 mm
Cutting options	3-in-1 option
Number of blades	2
Deck engagement	Electric PTO
Deck height positions	12
Deck wheels	4 rounded deck wheels
Wash nozzle/Mulch Kit/ mulching blade	Standard/Standard/Standard
DISCHARGE SYSTEM	
Bag (capacity)/accessory no.	200 l optional/(19A30003100)
Bag lever/hardtop	-/-
Bag full indicator/grass deflector	-/Standard
FRAME	
Front axle	Heavy-duty cast-iron
Front bumper	Loop
Turning circle	TIGHT TURN XTREME 17 cm / 6.6"
Wheel size (f/r)	15" x 6" Turf Saver / 20" x 8"
Wheel bearings	Sleeve bearings
Frame	Fully robotically-welded frame
ELECTRIC	
Headlights	LED
Bluetooth® App	Standard
COMFORT	
Seat type	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard
12 V plug	Standard
Mow in reverse (RevTEK™)	Standard
DIMENSIONS	
LpA/LwA/LwAg (dB)	88/98/100
Vibration value body/K-factor	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²
Dimensions (L/W/H)	180 cm / 144 cm / 110 cm
Net weight	230 kg
Model number	13BZA1CN603
EAN	 4 008423 881943

The Bluetooth® wordmark and logo are registered trademarks of Bluetooth SIG, Inc.


XT3 QR106e

XT3 QS127

ENGINE		
Engine type	Kawasaki	Kawasaki
Engine displacement	726 cm ³	726 cm ³
Rated power	12.7 kW / 2,300 min ⁻¹	15.7 kW / 2,900 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4 l	11.4 l
DRIVE SYSTEM		
Transmission	Hydrostatic, All-Ground Traction System	Hydrostatic, All-Ground Traction System
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard
CUTTING SYSTEM		
Mowing area in m ² /h	8,000	10,000
Cutting width	106 cm / 42"	127 cm / 50"
Cutting height (min-max)	25–100 mm	25–100 mm
Cutting options	3-in-1 option	3-in-1 option
Number of blades	2	3
Deck engagement	Electric PTO	Electric PTO
Deck height positions	12	12
Deck wheels	4 rounded deck wheels	4 rounded deck wheels
Wash nozzle/Mulch Kit/ mulching blade	Standard/(196-550-000/196-560-000)	Standard/Standard/Standard
DISCHARGE SYSTEM		
Bag (capacity)/accessory no.	360 l/electric bag lift and Anti-Dust-System	200 l optional/(19A30018100)
Bag lever/hardtop	Rounded ergo telescopic handle/ synthetic material	-/-
Bag full indicator/grass deflector	Deluxe w Blade Shutoff/(196-552-000)	-/Standard
FRAME		
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Bull Bar	Bull Bar
Turning circle	TIGHT TURN 38 cm / 15"	TIGHT TURN 38 cm / 15"
Wheel size (f/r)	15" x 6" Turf Saver / 18" x 9.5"	16" x 6.5-8" Turf Saver / 22" x 9.5"
Wheel bearings	Sleeve bearings	Ball bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC		
Headlights	LED	LED
Bluetooth® App	Standard	Standard
COMFORT		
Seat type	High Back Seat Cub Cadet/Armrests	High Back Seat Cub Cadet/Armrests
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard
12 V plug	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard
DIMENSIONS		
LpA/LwA/LwAg (dB)	88/98/100	93/103/105
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	267 cm / 110 cm / 118 cm	197 cm / 155 cm / 110 cm
Net weight	268 kg	260 kg
Model number	13BIA5CR603	14AIA5CQ603
EAN	 4 008423 881950	 4 008423 872545

The Bluetooth® wordmark and logo are registered trademarks of Bluetooth SIG, Inc.

XT3 QS137

ENGINE	
Engine type	Kawasaki
Engine displacement	726 cm ³
Rated power	16.2 kW / 3,000 min ⁻¹
Cylinders	V-TWIN dual cylinder
Tank volume (<i>capacity</i>)	11.4 l
DRIVE SYSTEM	
Transmission	Hydrostatic, All-Ground Traction System
Speeds	Infinitely variable (f/r)
Control	Foot pedal control
Cruise control	Standard
CUTTING SYSTEM	
Mowing area in m ² /h	11.000
Cutting width	137 cm / 54"
Cutting height (<i>min-max</i>)	25–100 mm
Cutting options	3-in-1 option
Number of blades	3
Deck engagement	Electric PTO
Deck height positions	12
Deck wheels	4 rounded deck wheels
Wash nozzle/Mulch Kit/ mulching blade	Standard/Standard/Standard
DISCHARGE SYSTEM	
Bag (<i>capacity</i>)/accessory no.	200 l optional/(19A30018100)
Bag lever/hardtop	-/-
Bag full indicator/grass deflector	-/Standard
FRAME	
Front axle	Heavy-duty cast-iron
Front bumper	Bull Bar
Turning circle	TIGHT TURN 38 cm / 15"
Wheel size (<i>f/r</i>)	16" x 6.5-8" Turf Saver /22" x 9.5"
Wheel bearings	Ball bearings
Frame	Fully robotically-welded frame
ELECTRIC	
Headlights	LED
Bluetooth® App	Standard
COMFORT	
Seat type	High Back Seat Cub Cadet/Armrests
Seat adjustment	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard
12 V plug	Standard
Mow in reverse (<i>RevTEK™</i>)	Standard
DIMENSIONS	
LpA/LwA/LwAg (<i>dB</i>)	93/103/105
Vibration value body/K-factor	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²
Dimensions (<i>L/W/H</i>)	197 cm / 167 cm / 110 cm
Net weight	270 kg
Model number	14AIA5CA603
EAN	 4 008423 872323

Cub Cadet[®]



**THE MOST
COMPREHENSIVE
RANGE OF ACCESSORIES
FOR XT LAWN TRACTORS!**

The extensive range of Cub Cadet accessories will help to meet all your gardening requirements and means you can use your XT lawn tractor all year round.

LAWN TRACTOR ACCESSORIES



STEEL CARGO CARRYING PLATFORM FOR XT SERIES SIDE DISCHARGE

- Folds vertically and locks into place
- Easy to install thanks to the FastAttach™ System
- Max. weight: 36 kg
- Suitable for XT Series side-dischargers



ELECTRIC SPREADER FOR XT SERIES SIDE DISCHARGE

- Easy to install thanks to the FastAttach™ System
- Can be switched on/off from the driver's seat
- Capacity: 45 kg
- Suitable for XT Series side dischargers



LAWN TRACTOR COVER L/XL

Size L: for small and medium sized lawn tractors



Size XL: for large-sized and rear discharge lawn tractors




MULCH KITS

Mulch Kit (without blades) for model LT1 NS96 and LT2 NS96



Mulch Kit (without blades) for models LT1 NR92, LT2 NR92 and LT3 PR105



Mulch Kit (without blades) for models XT1 OR106, XT2 QR106, XT2 PR106ie and XT3 QR106, mulching blades optional available (196-560-000)



Mulch Kit (without blades) for models XT1 OR95, XT2 PR95 and XT3 QR95, mulching blades optional available (196-561-000)



GRASS BAGS		
	Anti-Dust-System for 360 litre grass collection system, XT3 Series	4 008423 874976 Mod. no.: 196-553-603
	Anti-Dust-System for 320 litre grass collection system, XT1 and XT2 Series	4 008423 875089 Mod. no.: 196-555-603
	Twin bagger, 200 litre, for 96 cm / 107 cm decks of LT Series	4 008423 815849 Mod. no.: OEM-190-180A
	Twin bagger, 200 litre, for 96 cm decks of XT Series	4 008423 883350 Mod. no.: OEMR190-180A
	Twin bagger for 200 litre, for 107 / 117 cm decks of XT Series	0 043033 547708 Mod. no.: 19A30003100
	Twin bagger for 200 litre, for 107 / 117 cm, with variable tube, inspection window and FastAttach™ System, for XT Series	4 008423 879636 Mod. no.: 19A30030100
	Triple bagger 210 litre, for 127 / 137 cm decks of XT Series	0 037049 957286 Mod. no.: 19A30018100
DEFLECTORS		
	Rear deflector for all XT Series rear discharge models (for XT2 PR106ie & XT3 QR106e order number is ED-DEFLECT)	4 008423 875676 Mod. no.: 196-552-000
	Rear deflector for LT Series rear discharge models	4 008423 836097 Mod. no.: 196-750A678
FRONT BUMPER		
	Front Bumper Kit with FastAttach™ fits all LT Series lawn tractors	4 008423 809046 Mod. no.: OEM-196B603
	Front Bumper Single, XT Series	4 008423 876086 Mod. no.: 196-562-000
	Front Bumper Loop, XT Series	4 008423 876093 Mod. no.: 196-563-000
	Front Bumper Bull Bar, XT Series	4 056494 171210 Mod. no.: 196-564-000



AGRICULTURAL TYRES

Chevron style rear wheels 18" x 9.5". Set consists of 2 complete wheels. Fits all tractors with either 18" or 20" rear wheels. Not approved for XT3 models.



TYRE CHAINS

For 20" x 8" wheels incl. adapter



For 18" x 9.5" wheels incl. adapter



For XT 18" x 8.5" wheels



For XT 22" x 9", 5" x 12" and 23" x 9", 5" x 12" wheels



DOZER BLADE AND RUBBER LIP

117 cm dozer blade for LT Series



Rubber lip – universal – for all dozer blades



117 cm dozer blade for XT Series



ADDITIONAL XT ACCESSORIES

Armrests for XT Series



Mod. no.: 196-564-603

Battery charger for LR, LT and XT Series



Mod. no.: 196-967-678

Electrical grass bag emptying mechanism for XT Series rear discharge system. Only suitable for 2018 and later models.



Mod. no.: 196-570-600

Fuel canister, 10 litre



Mod. no.: 196-558-603





RELAX WHILE YOUR ROBOT DOES THE MOWING

ROBOTIC MOWERS

With our XR ENDURO SERIES™, Cub Cadet presents compact power packs that raise the bar for automated lawn mowing. You can choose from a total of five models: the new XR1 500 for small areas, the two XR2 models for areas up to 2,000 m² and the two top-of-the-range XR3 range models for areas up to 5,000 m². All of which meet a wealth of power and performance needs. Whichever XR robotic mower you choose, the same end result is guaranteed: a perfectly trimmed lawn in next to no time.

PLENTY OF OUTSTANDING FEATURES

The XR ENDURO SERIES robotic mowers include a huge range of features that help deliver ultra-efficient performance. As well as making mowing more convenient, they also create a uniquely precise and fast cut.



BEST-IN-CLASS

Outperforms other models with a durable and powerful mowing system! Mows up to 10 % faster all-round.



STATE-OF-THE-ART TECHNOLOGY

Performance and features to meet professional needs, such as a GSM module, App 2.0, brushless DC engine and multi-zone mowing.



POWER WHEELS AND CUTTING WIDTH

Extra-wide high-grip wheels for exacting requirements. Mows lawns measuring 500–5,000 m² efficiently.



MULTI-ZONE CAPABILITY:

Sub-zones connected to the main zone can be mowed consecutively. For separate zones that are not connected to the main area, a second station or a sensor (RoboZone) is required.



ULTRA-ROBUST HOUSING


Designed to meet the toughest demands.

XR

ENDURO SERIES™

**PIN CODE**

By entering your own unique PIN you ensure that no one else can use your XR robotic mower.

**INTEGRATED RAIN SENSOR**

If it rains the XR robotic mower automatically returns to its base and only starts cutting again once the weather improves.

**SMARTMOW**

Instead of just stopping and turning shortly before it reaches the perimeter wire, the XR robotic mower turns in a continuously smooth arc, saving time.

**PERFECT RIGHT TO THE LAWN EDGE**

Seamless agility and unique edge mode for mowing over the wheelbase – for perfect lawn edges.

**POWER MOTORS**

Its high-performance motors cut lawns quickly and efficiently. The brushless motors (not included in the XR2 1000 and 1500) run almost silently and require minimal maintenance.

**APP 2.0**

Communicate with the robotic mower via your smartphone and control all its functions (with BLE and GSM compatible).



XR

ENDURO SERIES™

NEW FEATURES FOR 2019

Cub Cadet is launching a range of innovations in 2019 including many new digital features that make it even easier to control the various functions of your XR robotic mower. Welcome to the future of lawn care!

NEW



ROBOZONE

The new RoboZone signal transmitter can easily activate separate zones without a second charging station. It is available as an accessory with a power cord.





ROBOCONNECT

This 2-way module receives and sends commands. It connects the XR with the APP 2.0 as well as the web portal MyXR for controlling the robotic lawnmower remotely.



ROBOCONNECT+

RoboConnect+ sends a message to your smartphone when the mower leaves a defined radius around your garden. MyXR also allows you to view the location of your XR robotic lawnmower at any time (Included with the XR2 2000 and XR3 5000 models.)



APP 2.0

This app lets you control one or several XR robotic mowers simultaneously. You can change settings and mowing schedules remotely and access mowing reports. The APP 2.0 is BLE and GSM compatible.



COMPLETE CONTROL VIA SMARTPHONE

The App 2.0 allows the robotic mowers in the XR ENDURO SERIES™ to be controlled and programmed securely and conveniently using your smartphone. Simply download the app, install it on your phone and get mowing!



REMOTE CONTROL
XR mowers can be manually controlled, even beyond the perimeter wire. Perfect for narrow passages and small areas.



UPDATES*

- Mowing progress
- Battery charge
- Mowing times



PROGRAM SETTINGS

- Deploy the mower
- Return to base
- Deactivate automatic start
- Set mowing times



CUSTOMER SERVICES

- Immediate assistance
- Online diagnostics
- Online troubleshooting

*Appear when the app is opened near to the XR robotic mower

THE RIGHT MOWER FOR ANY LAWN

No two gardens are the same. There could be one main lawn, several smaller turfs, or additional zones away from the main area that need mowing. The Cub Cadet XR ENDURO SERIES™ models can handle all such lawns with ease. Thanks to the RoboZone sensor you can mow separate zones without the need for a second base station.



Example:
main zone only



Example:
main zone and
sub zone



Example:
main zone and
separate zone



Example:
main zone, sub zone
and separate zone

EASY TO INSTALL AND PROGRAM.


To ensure your XR robotic mower is installed and programmed properly, we offer a professional installation service via your local dealer. You can also set the device up yourself.



STEP 1: DEFINE YOUR DESIRED MOWING ZONE
To do this, you need to install the perimeter wire and fix it in place with pegs.



STEP 2: ENTER INDIVIDUAL DATA
This will enable your XR robotic mower to work autonomously.



READY TO MOW!
First, your XR robotic mower will mow along the perimeter wire and then return to the base. If there is enough capacity left, it will set off again and mow your lawn in a random pattern.



This video will show you more about how to install and set up your robotic mower.

Cub Cadet[®]

EASY START

XR1

ENDURO SERIES™

The new Cub Cadet XR1 500 robotic mower is ideal for anyone owning a smaller lawn of up to 500 m² and looking for a compact yet high-performance mower. Driven by a 12V/8.8 Ah lithium-ion battery and a 100-watt motor, the optimised mowing and drive motors combined with the sure-grip spiked wheels achieve a high area performance. Only 3 hours of mowing are required per day for 500 m² of lawn. Which means the lawn is available to you 21 hours a day.



NEW

XR1 500

Cutting width:	18 cm / 7"
Cutting height:	15–45 mm
Mowing area (max.):	500 m ²
Mowing area (rec.):	400 m ²
Mowing time:	180 min
Motor:	DC Brush
Electricity consumption:	8 kWh/month
Model no.:	22AXGALD603



UNIQUE FEATURES OF THE NEW XR1 ENDURO SERIES



ROBOCONNECT
Allows the XR1 to be controlled and programmed via the Internet.



SPECIAL DESIGNED SPIKE WHEELS
A strong grip that provides better manoeuvrability, even on wet grass.



EXTERNAL CHARGING STATION
Place the base station near the edge of the lawn area to be mowed so that you can use the entire area as soon as your mowing robot is finished.



RELIABLE MOTOR
Extremely sturdy mower motor with powerful 100 Watt output. You can look forward to a long service life and a minimum of maintenance.



ROBOHOME (INCL.)
A garage for your XR1 500: Installed above the charging station, the robo home device keeps the mower clean and protects it from rain and direct sunlight.



METAL SKI
Ski-type metal running surfaces deliver maximum manoeuvrability, providing easy mowing even in the tightest of spaces.



FLOATING MULCHING DECK
This ensures the XR1 500 manages any terrain and mows with extreme precision.



12V/8.8 AH LI-ION BATTERY
The XR1 500 is powered by a modern lithium-ion battery and mows for 3 hours without recharging.

PATENTED



MULCHCLEANER
Our unique patented mulch cleaner independently cleans the mowing deck by automatically cleaning the clippings out of the mowing deck while mowing, improving performance and reducing maintenance.

4
ROBOTIC MOWERS

XR2

ENDURO SERIES[™]



BRILLIANT CUT FROM THE GROUND UP!

The two XR2 models are the perfect place to start in the mid robotic mower range, ideal for lawns up to 2,000m².

They feature an impressive mowing system. The unique edge mode, where blades extend beyond the wheelbase, ensures absolutely every edge is mown, which eliminates the need to tidy up afterwards with a lawn trimmer.

And thanks to the specially designed spiked wheels, the XR2 models manoeuvre extremely well and safely – even on wet grass.



XR2 1000

Cutting width:	28 cm / 11"
Cutting height:	15–60 mm
Mowing area (max.):	1,000 m ²
Mowing area (rec.):	500 m ²
Mowing time:	45–50 min
Motor:	DC Brush
Electricity consumption:	11 kWh/month
Model no.:	22BCBAAD603



XR2 2000

Cutting width:	28 cm / 11"
Cutting height:	15–60 mm
Mowing area (max.):	2,000 m ²
Mowing area (rec.):	1,200 m ²
Mowing time:	60–70 min
Motor:	DC Brushless
Electricity consumption:	18 kWh/month
Model no.:	22BCAFAD603

UNIQUE FEATURES OF THE XR2 ENDURO SERIES



ROBOCONNECT

Allows you to access the online portal features. Our XR2 2000 model also comes with a GPS feature to locate the mower when necessary.




HIGH-PERFORMANCE ENGINE

200 Watt ensures top-level performance and extremely efficient mowing. The XR2 2000 even features a brushless and therefore practically wear-free, engine.



EXTERNAL CHARGING STATION

Our charging station doesn't have to be directly on the lawn, it can also be installed next to it.




TURBO MODE

Turns on automatically the first time you use your mower to mow long grass faster and switches off instantly for shorter grass. Can also be set manually.



ROBOHOME (INCL. WITH XR2 2000)

A garage for your XR2: Installed above the charging station, the device keeps the mower clean and protects it from rain and direct sunlight.



LONG BATTERY LIFE

With twice as many charging cycles as conventional Li-Ion batteries, the LiFePO₄ high-capacity battery doubles battery life.



SPECIALLY DESIGNED SPIKED WHEELS

A strong grip that provides better manoeuvrability, even on wet grass.



MAXIMUM MANOEUVRABILITY

A single front wheel ensures great manoeuvrability, especially whilst mowing the edge of the lawn.



BLE (BLUETOOTH® LOW-ENERGY) REMOTE CONTROL

Allows the XR2 to be controlled conveniently from a distance* and is available as an accessory.

The Bluetooth® wordmark and logo are registered trademarks of Bluetooth SIG, Inc.
*Within Bluetooth® range

XR3

ENDURO SERIES[™]



EXTREMELY STRONG AND POWERFUL!

The two XR3 models are in a class of their own. They feature an extremely durable and rapid mowing system that meets the highest demands for lawns up to 5,000m².

These top-of-the-range models also include the unique edge mode where blades extend beyond the wheel base, ensuring that absolutely every edge is mown: no more having to manually tidy up afterwards with a lawn trimmer.

The high-performance brushless motors operate at 2 x 200 Watt and are extremely durable.



XR3 3000

Cutting width:	56 cm / 22"
Cutting height:	20–80 mm
Mowing area (max.):	3,000 m ²
Mowing area (rec.):	1,600 m ²
Mowing time:	55–70 min
Motor:	DC Brushless
Electricity consumption:	22 kWh/month
Model no.:	22BSBAAD603



XR3 5000

Cutting width:	56 cm / 22"
Cutting height:	20–80 mm
Mowing area (max.):	5,000 m ²
Mowing area (rec.):	3,600 m ²
Mowing time:	80–100 min
Motor:	DC Brushless
Electricity consumption:	34 kWh/month
Model no.:	22BSGAGD603

UNIQUE FEATURES OF THE XR3 ENDURO SERIES



ROBOCONNECT

Allows you to access the online portal features. Our XR3 5000 model also comes with a GPS feature to locate the mower when necessary.




EXTREMELY POWERFUL BRUSHLESS MOTOR

2 x 200 Watt ensure outstanding mowing performance.



ROBOHOME (INCL. WITH XR3 5000)

A garage for your XR3: Installed above the charging station, the device keeps the mower clean and protects it from rain and direct sunlight.




TURBO MODE

Turns on automatically the first time you use your mower to mow long grass faster and switches off instantly for shorter blades. Can also be set manually.



ROBOGRIPS

Improved traction and added grip on inclines and slippery surfaces.



LONG BATTERY LIFE

With twice as many charging cycles as conventional Li-Ion batteries, the LiFePO₄ high-capacity battery doubles battery life.



BLE (BLUETOOTH® LOW-ENERGY) REMOTE CONTROL

Allows the XR3 to be controlled conveniently from a distance*.



FLOATING MOWING DECK AND MAXIMUM MANOEUVRABILITY



Flawlessly handles even unusual terrain with incredible accuracy. The single front wheel ensures great manoeuvrability.

The Bluetooth® wordmark and logo are registered trademarks of Bluetooth SIG, Inc.
*Within Bluetooth® range

XR1 500

XR2 1000























XR2 2000










MOTOR			
Motor type	DC Brush	DC Brush	DC Brushless
Mowing power	100 Watt	200 Watt	200 Watt
BATTERY			
Battery	12V / 8.8 Ah Li-Ion	26V lithium ion phosphate 2.4 Ah (LiFePO ₄)	26V lithium ion phosphate 3 Ah (LiFePO ₄)
Mowing time	180 min	45–50 min	60–70 min
Charging time	8–10 h	50–70 min	70–90 min
Power consumption	8 kWh/month	11 kWh/month	18 kWh/month
CUTTING SYSTEM			
Mowing area in m ² /h (max.)	500	1,000	2,000
Mowing area in m ² /h (rec.)	400	500	1,200
Cutting width	18 cm / 7"	28 cm / 11"	28 cm / 11"
Cutting height (min.–max.)	15–45 mm	15–60 mm	15–60 mm
Blades	steel blades	steel blades	steel blades
Mowing zones	1 main zone, 2 sub zones, 2 separate zones	1 main zone, 3 sub zones, 2 separate zones	1 main zone, 3 sub zones, 2 separate zones
Area coverage per hour	55 m ² /h	75 m ² /h	75 m ² /h
Maximum inclination	8.5° / 15 %	20° / 36 %	20° / 36 %
EQUIPMENT			
Base station	Standard	Standard	Standard
RoboHome	Standard	Optional (MRK7030A)	Standard
RoboGrips	Standard	Standard	Standard
Display	-	LED	LED
Bluetooth®	Standard	Standard	Standard
Bluetooth® Remote Control	-	Optional (MRK7100A)	Optional (MRK7100A)
Smart app	Standard	Standard	Standard
Rain sensor	-	Standard	Standard
Anti-theft precautions	Standard	Standard	Standard
Bump-Sensor	Standard	-	-
Tilt-Sensor	Standard	Standard	Standard
Lift-Sensor	Standard	Standard	Standard
Edge mode	-	Standard	Standard
SmartMow	-	Standard	Standard
GSM modul/GPS	Standard/-	Standard/-	Standard/Standard
Turbo mode	-	Standard	Standard
Large power wheels	Standard	Standard	Standard
DIMENSIONS			
LpA/LwA/LwAg (dB)	70/68/70	70/68/70	70/68/70
Dimensions (L/W/H)	53 cm / 42 cm / 26 cm	63 cm / 46 cm / 21 cm	63 cm / 46 cm / 21 cm
Net weight	7.5 kg	11.1 kg	11.4 kg
Model number	22AXGALD603	22BCBAAD603	22BCFAFD603
EAN	 4 008423 892093	 4 008423 883398	 4 008423 883435

XR3 3000
XR3 5000

MOTOR		
Motor type	DC Brushless	DC Brushless
Mowing power	2 x 200 Watt	2 x 200 Watt
BATTERY		
Battery	26V lithium ion phosphate 4.5 Ah (LiFePO ₄)	26V lithium ion phosphate 6 Ah (LiFePO ₄)
Mowing time	55–70 min	80–100 min
Charging time	90–110 min	90–110 min
Power consumption	22 kWh/month	34 kWh/month
CUTTING SYSTEM		
Mowing area in m ² /h (max.)	3,000	5,000
Mowing area in m ² /h (rec.)	1,600	3,600
Cutting width	56 cm / 22"	56 cm / 22"
Cutting height (min.–max.)	20–80 mm	20–80 mm
Blades	steel blades	steel blades
Mowing zones	1 main zone, 4 sub zones, 2 separate zones	1 main zone, 4 sub zones, 2 separate zones
Area coverage per hour	180 m ² /h	180 m ² /h
Maximum inclination	20° / 36 %	20° / 36 %
EQUIPMENT		
Base station	Standard	Standard
RoboHome	Optional (MRK0076A)	Standard
RoboGrips	Standard	Standard
Display	LCD	LCD
Bluetooth®	Standard	Standard
Bluetooth® Remote Control	Optional (MRK7100A)	Standard
Smart app	Standard	Standard
Rain sensor	Standard	Standard
Anti-theft precautions	Standard	Standard
Bump-Sensor	Standard	Standard
Tilt-Sensor	Standard	Standard
Lift-Sensor	Standard	Standard
Edge mode	Standard	Standard
SmartMow	Standard	Standard
GSM modul/GPS	Standard/-	Standard/Standard
Turbo mode	Standard	Standard
Large power wheels	Standard	Standard
DIMENSIONS		
LpA/LwA/LwAg (dB)	70/72/74	70/72/74
Dimensions (L/W/H)	73,5 cm / 66 cm / 31 cm	73,5 cm / 66 cm / 31 cm
Net weight	20 kg	20.2 kg
Model number	22BSBAAD603	22BSGAGD603
EAN	 4 008423 883442	 4 008423 883466

ROBOTIC MOWER ACCESSORIES

PERIMETER SETTING			
	Perimeter wire (650 metres on spool)		Mod. no.: MRK0067B
	Installation Kit small (for max. 400 m ²) 100 m wire, 150 pegs		Mod. no.: 122-001-603
	Installation Kit medium (for max. 1,200 m ²) 150 m wire, 200 pegs		Mod. no.: 122-002-603
	Installation Kit large (for max. 2,500 m ²) 250 m wire, 350 pegs		Mod. no.: 122-003-603
ROBOZONE			
	RoboZone with power supply for all XR models		Mod. no.: 122-025-603
BASE STATIONS			
	Base station Kit for XR1 500		Mod. no.: MRK9105A
	Base station Kit for XR2 models		Mod. no.: MRK7006B
	Base station Kit for XR3 models		Mod. no.: MRK6102B
COVERS			
	RoboHome for XR2 models		Mod. no.: 122-075-603
	RoboHome for XR3 models		Mod. no.: 122-072-603
CONTROL			
	Bluetooth® remote control for XR2/XR3 models		Mod. no.: MRK7100A

BLADES			
	1 blade kit XR2 models		Mod. no.: MRK7003A
	2 blade kit XR3 models		Mod. no.: MRK6101A
GRIPS			
	RoboGrips XR2 models (for XR2 Powerwheels)		Mod. no.: MRK7023A
	RoboGrips XR3 models (for XR3 Powerwheels)		Mod. no.: MRK6022A
ROBOCONNECT+			
	Included with the XR2 2000 and XR3 5000 models.		Mod. no.: 122-143-619



Cub Cadet[®]





LH

FORCE SERIES

80V
LI-ION DURA SYSTEM

TOP PERFORMANCE RIGHT FROM THE START

80V LI-ION DURA SYSTEM

Innovation, power and performance are all strengths of Cub Cadet garden machinery. Never more so than shown through our new lithium-ion battery technology range – the 80V Li-ION DURA SYSTEM. Right from the start, the DURA garden tools range has been designed to excel in terms of performance, capacity and flexibility. They are ideal for everyone who needs high performance from green technology across various garden tools.

ONE BATTERY FOR ALL TOOLS

80V

LI-ION DURA SYSTEM


THE CUB CADET 80V BATTERY TECHNOLOGY

Cub Cadet 80V LI-ION DURA SYSTEM garden tools have been specially designed and developed to maximise performance and endurance. They are extremely quiet and eco-friendly, require minimal care and maintenance and with no emissions or cables to get tangled, they provide the performance and freedom to get the job done.



ONE BATTERY FOR ALL TOOLS

The Cub Cadet power pack fits in all 80V LI-ION DURA SYSTEM battery-powered tools – lawn trimmers, hedge trimmers, leaf blowers and lawnmowers.



CLICK MECHANISM TO QUICKLY LOCK AND UNLOCK THE BATTERY

Simply plug it in, securely snap into place – done! Unlocking is just as easy: safely disengage the battery with no risk of dropping it and simply remove.



READY TO USE AFTER JUST 1 HOUR

The 80V LI-ION POWER CHARGER charges batteries in just one hour – one of the fastest charging cycles on the market!



READY FOR USE IN SECONDS

Simply slot in, engage securely and you're ready to go!



INTEGRATED COOLING AND VENTILATION SYSTEM

Ensures safe charging and prevents battery overheating, extending the battery service life.



LH

FORCE SERIES

FORCE SERIES



5
80V LI-ION DURA SYSTEM



— Cub Cadet® — AXIAL FAN

The axial fan offers enhanced efficiency in every stage as well as maximum air circulation through a vertical design.

LEAF BLOWER LH3 EB

QUICKLY CLEAR AWAY DRY OR WET LEAVES

The power of the Cub Cadet 80V leaf blower leads the way for cordless tools. It is just as powerful as comparable petrol devices – only with no emissions and less noise and will remove that autumn carpet of leaves at lightning speed.



NARROW NOZZLE
for maximum
air speed

TURBO MODE
Press the button to use
the turbo power when
you need it and
continue working in
economy mode by
releasing it.

AXIAL FAN
for maximum
effectiveness at
every setting



INCLUDES:

- narrow nozzle
- wide nozzle
- leaf scraper for wet leaves
- shoulder strap

	LH3 EB	LH3 EB SET
Equipment:	Battery and charger available separately	Incl. battery and charger
Runtime:	up to 60 min	
Charging time:	60 min	
Speed:	240 km/h	
Air flow:	750 m³/h	
Axial fan:	Standard	
Turbo mode:	Standard	
Complete set:	Standard	
Model no.:	41AA0B0-603	41AA0B0N-603



**—Cub Cadet®—
SWIVEL-ACTION BLADE**


The blades are adjustable in five positions: 90°/45°/0°/-45°/-90°, keeping your hands in the ideal position at all times and making it easier to cut across hedge faces.



HEDGE TRIMMER LH3 EH

KEEP HEDGES IN SHAPE EFFORTLESSLY

The Cub Cadet 80V hedge trimmer adjusts flexibly to your hedge so you don't have to stretch.

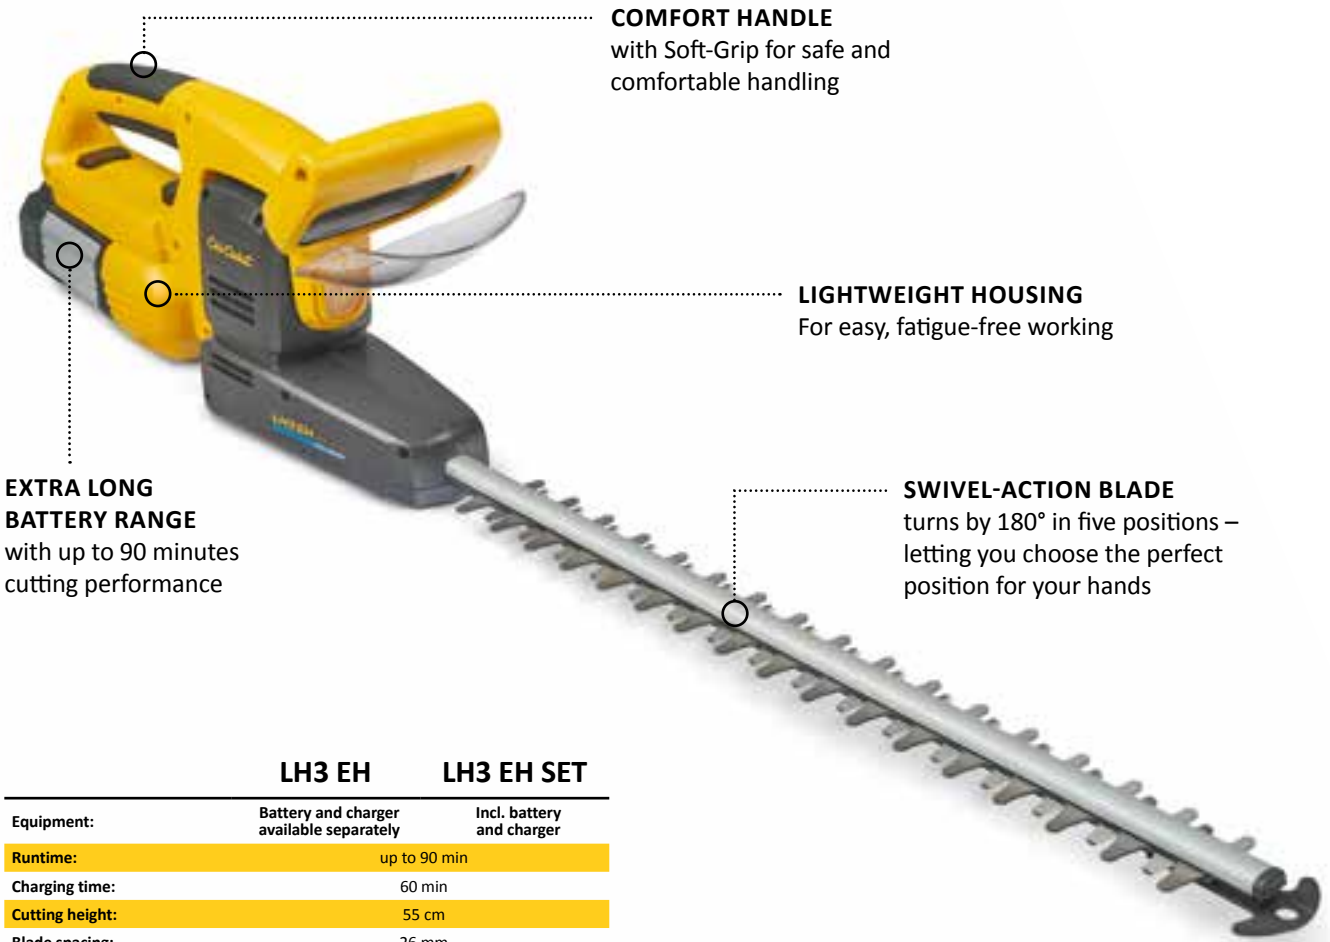

COMFORT HANDLE
with Soft-Grip for safe and comfortable handling

LIGHTWEIGHT HOUSING
For easy, fatigue-free working

EXTRA LONG BATTERY RANGE
with up to 90 minutes cutting performance

SWIVEL-ACTION BLADE
turns by 180° in five positions – letting you choose the perfect position for your hands

LH3 EH LH3 EH SET

Equipment:	Battery and charger available separately	Incl. battery and charger
Runtime:	up to 90 min	
Charging time:	60 min	
Cutting height:	55 cm	
Blade spacing:	26 mm	
Swivel-action blade:	Standard	
Adjustable angles:	90°/45°/0°/-45°/-90°	
Comfort handle:	Standard	
Model no.:	41AG0DO-603	41AG0DN-603

5
80V LI-ION DURA SYSTEM




— Cub Cadet® — MULCH COVER

Thanks to the lockable mulch cover, the cuttings remain in a narrow 50 cm area instead of spreading across a 2-metre radius.

LAWN TRIMMER LH3 ET

TRIM AND CUT BACK GRASS WITH EXTRA POWER

The ideal trimmer when you want to remove grass at lawn edges and even cut back long grass on inclines.

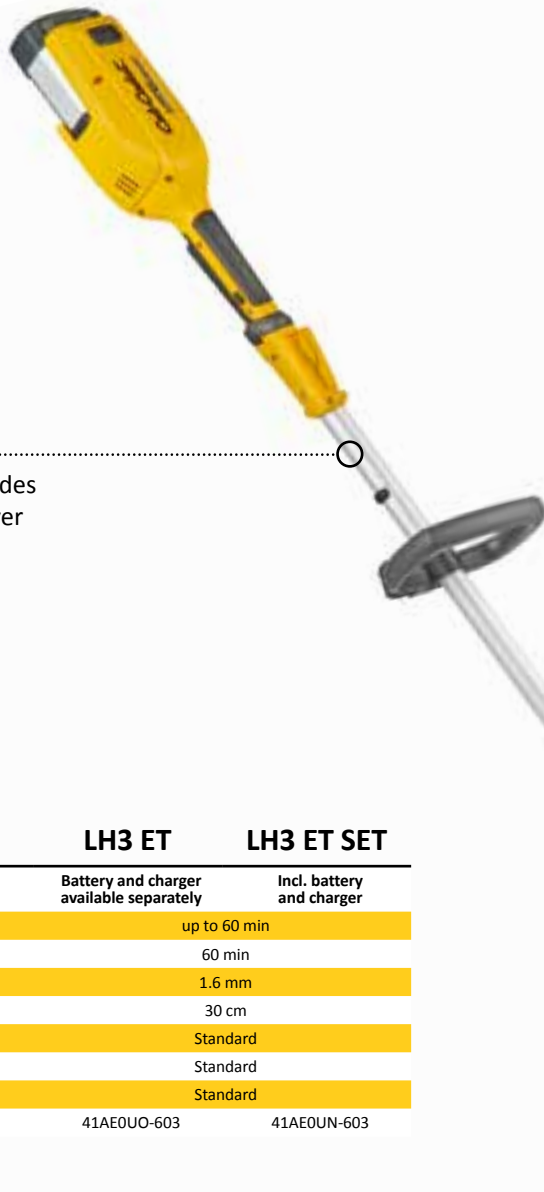

INCLUDES:

- replacement blades
- cutting head cover
- line reel
- shoulder strap

TOOL-FREE ADD-ONS

Add a cutting blade to create a brush cutter without removing the line

LOCKABLE MULCH COVER

spreads the cuttings over a radius of only 50 cm instead of 2 m

LH3 ET

LH3 ET SET

Equipment:	Battery and charger available separately	Incl. battery and charger
Runtime:	up to 60 min	
Charging time:	60 min	
Line thickness:	1.6 mm	
Cutting width:	30 cm	
Lockable mulch cover:	Standard	
Tool-free add-ons:	Standard	
Complete set:	Standard	
Model no.:	41AE0UO-603	41AE0UN-603

ACCESSORIES

80V LI-ION DURA SYSTEM

80V POWER-PACK battery, 2.5 Ah		Mod. no.: 196A650-603
80V LI-ION POWER charger, 6 Ah		Mod. no.: 196A651-603
Blades for 80V trimmer		Mod. no.: 196-631-603
Leaf scraper for 80V blower		Mod. no.: 196-630-603

ENDLESS POWER FOR MOWING AND MULCHING



Do you want the performance of a petrol engine but without the noise and engine fumes? Then the two 80V lawnmowers are perfect! Packed with market leading developments, from the leading lithium battery, 3-in-1 cutting options to the boosted airflow technology, these lawnmowers are lightweight and pack a punch when it comes to performance.



POWERFUL MOTOR
Long-range mowing with the powerful, maintenance-free and brushless 80V motor.



BOOSTED AIRFLOW TECHNOLOGY
For optimal transport of the cuttings to the grass bag.



3-IN-1 SYSTEM
Rear discharge, collection and mulching in a single tool – adjustable settings.



INCLUDES:

- battery
- rapid charger



3-in-1

LM3 E37

LM3 E40

Cutting width:	37 cm / 11"	40 cm / 11"
Mowing area:	300–500 m ²	500–800 m ²
Grass bag capacity:	40 l	45 l
Cutting height adjustment:	6 positions/central	6 positions/central
Cutting options:	3-in-1	3-in-1
Boosted-Airflow Technology:	Standard	Standard
Net weight:	15 kg	16 kg
Model no.:	18AKHJ23603	18AKJ33603

5

80V LI-ION DURA SYSTEM

LH3 EB




LH3 EH

LH3 ET

BATTERY			
Battery/Charger	(196A650-603)/(196A651-603)	(196A650-603)/(196A651-603)	(196A650-603)/(196A651-603)
Runtime	up to 20 min	up to 60 min	up to 60 min
Charging time/charging cycles	60 min	60 min	60 min
Voltage	80V max.	80V max.	80V max.

FEATURES			
Speed (max.)	240 km/h	-	-
Air flow	750 m ³ /h	-	-
Speed stages	-	-	-
Housing (material)	Plastic	Plastic	Plastic
Cutting movements (max.)	-	1,500/min	-
Cutting length	-	55 cm	-
Blade spacing	-	26 mm	-
Cutting width	-	-	30 cm
Line thickness	-	-	1.6 mm
Line spool	-	-	Double line




MAIN FEATURES			
Axial fan	Standard	-	-
Turbo mode	Standard	-	-
Narrow nozzle & wide nozzle	Standard	-	-
Swivel action blade	-	Standard	-
Comfort handle	-	Standard	-
Dual action blades	-	Standard	-
Tool-free add-on	-	-	Standard
Lockable mulch cover	-	-	Standard
Complete set	-	-	Standard

DIMENSIONS			
LpA/LwA/LwAg (dB)	86,3/98,7/101	84/96/99	86/94/96
Vibration value hand/arm / K-factor	2.8 / 1.5 m/s ²	2.5 / 1.5 m/s ²	2.5 / 1.5 m/s ²
Dimensions (L/W/H)	39 cm / 19 cm / 28.6 cm	105 cm / 15 cm / 25 cm	175 cm / 34.5 cm / 18 cm
Net weight	2.9 kg	3.5 kg	3.0 kg
Model number	41AA0B0-603	41AG0D0-603	41AE0U0-603
EAN	 4 008423 883008	 4 008423 882223	 4 008423 882209

LH3 EB Set

LH3 EH Set

LH3 ET Set

Battery/Charger	Included	Included	Included
Model number	41AA0BN-603	41AG0DN-603	41AE0UN-603
EAN	 4 008423 882179	 4 008423 882216	 4 008423 882193

LM3 E37

LM3 E40

BATTERY		
Battery/Charger	Included	Included
Runtime	up to 60 min	up to 60 min
Charging time/charging cycles	60 min	60 min
Engine/Voltage	Brushless / 80V max.	Brushless / 80V max.
DRIVE SYSTEM		
Drive	Pushed	Pushed
Driving stages	-	-
Speed (max.)	-	-
CUTTING SYSTEM		
Lawn area	300–500 m ²	500–800 m ²
Housing (material)	Plastic	Plastic
Cutting width	37 cm / 14.5"	40 cm / 16"
Mowing options	3-in-1	3-in-1
Cutting height adjustment	6 positions/central	6 positions/central
Cutting height (min/max)	25–75 mm	25–75 mm
Grass collection	-	-
Mulch Kit	Standard	Standard
Side discharge	-	-
Rear discharge without grass bag	Standard	Standard
DISCHARGE SYSTEM		
Grass bag	Soft bag with cover	Soft bag with cover
Grass bag (capacity)	40 l	45 l
Filling level indicator	Standard	Standard
WHEELS		
Wheels (f/r)	150 mm/200 mm	150 mm/200 mm
Double ball bearing	Standard	Standard
COMFORT		
Cutting deck washing nozzle	-	-
Bar	-	-
Folding bar	Standard	Standard
Height-adjustable bar	Standard	Standard
Covering on bar	Soft-Grip	Soft-Grip
DIMENSIONS		
LpA/LwA/LwAg (dB)	79.7/94/96	77.8/94/96
Vibration value hand/arm / K-factor	2.5 / 1.5 m/s ²	2.5 / 1.5 m/s ²
Dimensions (L/W/H)	139 cm / 40 cm / 110 cm	139 cm / 41 cm / 110 cm
Net weight	15 kg	16 kg
Model number	18AKHJ23603	18AKJJ33603
EAN	 4 008423 882131	 4 008423 882148

Cub Cadet[®]





LC

FORCE SERIES

XC

ENDURO SERIES™

LOADS OF GARDENING POWER

CHORE PERFORMERS.

Innovation, selection and performance are all strengths of the complete line up of Cub Cadet chore performers. From the ground breaking XC3 F46 tiller and the LC3 DP56 lawn trimmer, up to the XC1 B40 scarifier and LC2 BP6 lawn edge cutter, Cub Cadet chore performers support you with a strong engine and a powerful performance during the whole gardening season.

LAWN EDGE CUTTER – CLEAR LINES FOR A WELL-KEPT GARDEN

Over time, grass will grow over the lawn edges and paths in any garden. With the new Cub Cadet LC2 BP6 lawn edge cutter you can remove that grass quickly and efficiently.

The design allows you to guide the device precisely along the lawn edge, neatly clearing paths, flagstones and flowerbeds. And your garden will look perfect again.



EASILY ADJUSTABLE ANGLE

This allows you to quickly adjust the cutter head according to your needs, either vertically or horizontally.



OPTIONAL TRIPLE STAR BLADE

The factory-mounted steel blade can be replaced by a triple star blade with a few simple steps, allowing you to remove matted grass and scrub easily.

LC2 BP6



Cutting system:	Steel – Dual Tip, Ø 23 cm / 9"
Cutting height adjustment:	6 positions
Engine:	B&S 450e series
Engine displacement:	125 cm ³
Engine start:	Pull starter
Wheels:	180/200 mm, curb wheel right
Net weight:	23.5 kg
Model number:	25A-550G603

ACCESSORY

LAWN EDGE

Triple star blade



4 047427 579784 >

Mod.-Nr.: 1112-M6-0001

MOBILE LAWN TRIMMER – STRONG ENOUGH TO CUT EVERYTHING

The Cub Cadet LC3 DP56 mobile lawn trimmer is ideal for clearing long grass and heavy scrub. With the powerful Cub Cadet engine and ultra-large cutting width (56cm / 22"), trim long grass and weeds at a stroke.

EXCEPTIONALLY EASY TO HANDLE

The large, 36cm-diameter wheels negotiate uneven ground with remarkable agility. The special design of the cutting head helps you effortlessly curve around obstacles and reach into corners.

POWERFUL PERFORMANCE

Thanks to the power of a high quality Cub Cadet engine, managing tough jobs is a breeze.

EASY HEIGHT ADJUSTMENT

Adjust the cutting height to your requirements with ease. Set low to trim along fences, walls and buildings, higher for long, dense weeds on open ground.

CHORE PERFORMERS

6

LC3 DP56



Cutting width:	56 cm / 22"
Cutting height:	60–110 mm
Line:	4 mm ø
Engine:	Cub Cadet 55 OHV
Wheels:	360 mm ø
Drive:	Pushed
Net weight:	31 kg
Model number:	25A-262E603

ACCESSORY

REPLACEMENT LINE FOR LC3 DP56



10 pcs. of cutting line AF3.20, cut to 3,9 mm x 47 cm length



4 056494 116662
Mod.-Nr.: 1182-WS-0001

SCARIFIER:

THE BEAUTY TREATMENT FOR YOUR LAWN.

Scarifying is a key part of optimal lawn care. It helps fight the notorious thatch which forms on every lawn and blocks the supply of air, water and nutrients to the roots. Correct scarifying will let your lawn breathe again. The Cub Cadet XC1 applies the power you need to remove this thatch and let sunlight, air and water once again reach the soil and roots. The XC1 also features blades and springs, this means you get two functions in a single machine: aerating and scarifying.



BLADES AND SPRINGS

The XC1 B35 has 15 flail double blades and 14 springs and the XC1B40 has 17 flail double blades and 16 springs. If you would like to aerate the soil, use the higher position with a gentle touch of the blades and springs on the surface of the soil. If there is the need to scarify, set the position of the blades and springs to a 3 mm working depth.



REMOTE TRANSPORT POSITION

With the lever on the handle you can switch from transport to working position conveniently from behind the unit.



WORKING DEPTH ADJUSTMENT

The working depth can easily be changed centrally.



XC1 B35

Working width:	35 cm / 14"
Mowing area:	800 m ² /h
Grass bag capacity:	60 l optional
Engine:	Cub Cadet 35 H OHV
Engine displacement:	123 cm ³
Drive:	Pushed
Working depth adjustment:	Central
Model number:	16AH9AMQ603



XC1 B40

Working width:	40 cm / 16"
Mowing area:	1,000 m ² /h
Grass bag capacity:	60 l optional
Engine:	Cub Cadet 35 H OHV
Engine displacement:	123 cm ³
Drive:	Pushed
Working depth adjustment:	Central
Model number:	16CH8AMQ603

IMPORTANT LAWN CARE INFORMATION:

After scarifying your lawn, please don't forget to reseed blank spots and nourish it with fertiliser and water.

ACCESSORY

SCARIFIER

Collection bag, 60 litre



4 008423 876772

Mod. no.: 196-640-000

GARDEN TILLER – GROUNDBREAKING IN EVERY SENSE OF THE WORD

Using the XC3 garden tiller, the strenuous and time-consuming task of digging and loosening the soil with a spade is a thing of the past. Powerful and reliable, this tiller tackles any job; breaking up even the hardest of soil and facilitating seed preparation. It is ideal for areas of up to 1,000 m². Four self-sharpening, heat-treated, high-quality tine sets made of spring steel ensure excellent work results at a tilling width of 46 cm / 18".

The adjustable depth stake improves the machine stability and allows control of the working speed and tilling depth. The tiller has a forward and a reverse gear and a gear with a forward/backward rotation of the chopping blades.




USER-FRIENDLY
Single-hand operation allows you to avoid footprints in areas already worked on.




FULL COVER
Fully covered tine set with 46 cm / 18" working width.



DEPTH STAKE
Fully adjustable depth stake.



BI-DIRECTIONAL TINES
The self-sharpening tines (330mm dia) rotate forward for milling and backward for deep digging. They produce a fine crumbled bed in any soil.



EXTRA-WIDE
Extra-wide 46 cm / 18" tilling width gives you more tilling area per pass – helping you cover more ground at a time.

XC3 F46





Working width	46 cm / 18"
Mowing area:	1,000 m ²
Engine:	Cub Cadet 65 H OHV
Engine displacement:	208 cm ³
Drive:	Dual Direction
Working depth adjustment:	Adjustable depth stake
Weight:	104 kg
Model number:	21BB45M8603



LC2 BP6




LC3 DP56

ENGINE		
Engine type	B&S 450e series	Cub Cadet 55 OHV
Engine displacement	125 cm ³	159 cm ³
Rated power	2,0 kW / 2,900 min ⁻¹	2,1 kW / 2,800 min ⁻¹
Engine start	Pull starter	Pull starter
Tank volume (capacity)	0.8 l	1.0 l
WORKING METHOD		
Drive	-	Pushed
Rec. area capacity in m ² /h	-	1,000
Housing (material)	-	-
Cutting and working width	-	56 cm / 22"
Blade/Line (only LC3 DP65)	Ø 23 cm, steel – Dual Tip, 3 positions angle adjustable	Ø 4 mm
Cutting height adjustment	6 positions	– positions/central
Cutting height (min/max)	max. 5.75 cm	60–110 mm
Chopping shaft direction of rotation	-	-
Balancing weight at front	-	-
Side cover/Grass-collection	-	-
Tailgate	-	-
Rear discharge without grass bag	-	-
Lawn aeration	-	-
BLADE		
Blade drive	V-belt	V-belt
Scarifier blade	-	-
Springs for lawn aeration	-	-
COLLECTING		
Grass bag	-	-
Grass bag (capacity)	-	-
WHEELS		
Wheels (f/r)	180 / 200 mm, curb wheel right	360 mm
Double ball bearing	-	-
COMFORT		
Clutch lever	-	-
Handle type	loop, straight, foldable	3 positions
DIMENSIONS		
LpA/LwA/LwAg (dB)	88/98/100	93/106/108
Vibration value hand/arm / K-factor	6 / 1.0 m/s ²	6.5 / 1.5 m/s ²
Dimensions (L/W/H)	123 cm / 42 cm / 97 cm	140 cm / 55 cm / 100 cm
Net weight	23.5 kg	31 kg
Model number	25A-550G678	25A-262E603
EAN	 4 008423 852769	 4 008423 881967

XC1 B35

XC1 B40

XC3 F46

ENGINE			
Engine type	Cub Cadet 35 H OHV	Cub Cadet 35 H OHV	Cub Cadet 65 H OHV
Engine displacement	123 cm ³	123 cm ³	208 cm ³
Rated power	2.3 kW / 3,600 min ⁻¹	2.3 kW / 3,600 min ⁻¹	3.9 kW / 3,600 min ⁻¹
Engine start	Pull starter	Pull starter	Pull starter
Tank volume (capacity)	1.7 l	1.7 l	2.2 l
WORKING METHOD			
Drive	Pushed	Pushed	Dual Direction
Rec. area capacity in m ² /h	800	1,000	1,000
Housing (material)	Steel with plastic	Steel with plastic	-
Cutting and working width	35 cm / 14"	40 cm / 16"	46 cm / 18"
Blade	Ø 163 mm	Ø 163 mm	4 (2x2), 33 cm
Cutting height adjustment	Stepless/central	Stepless/central	-
Cutting height (min/max)	0 to -15 mm	0 to -15 mm	-
Chopping shaft direction of rotation	-	-	forward/reverse
Balancing weight at front	-	-	Standard
Side cover/Grass-collection	-	-	Standard
Tailgate	Standard	Standard	With rake
Rear discharge without grass bag	Standard	Standard	-
Lawn aeration	Standard	Standard	-
BLADE			
Blade drive	V-belt	V-belt	-
Scarifier blade/blade (only LC2 BP6)	30 (15 double blade)	34 (17 double blade)	-
Springs for lawn aeration	28 (14 double springs)	32 (16 double springs)	-
COLLECTING			
Grass bag	60 l optional (196-640-000)	60 l optional (196-640-000)	-
Grass bag (capacity)	Optional 60 l	Optional 60 l	-
WHEELS			
Wheels (f/r)	200 mm / 200 mm	200 mm / 200 mm	355 mm, pneumatic tyres, field studs
Double ball bearing	Standard	Standard	-
COMFORT			
Clutch lever	-	-	Unbroken bar for left/right single-handed operation
Handle type	-	-	Steplessly height-adjustable for ergonomic and safe working
DIMENSIONS			
LpA/LwA/LwAg (dB)	86/96/98	86/96/98	98/108/110
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 2.5 m/s ²
Dimensions (L/W/H)	124 cm / 61 cm / 112 cm	124 cm / 61 cm / 112 cm	172 cm / 61 cm / 114 cm
Net weight	38 kg	39 kg	104 kg
Model number	16AH9AMQ603	16CH8AMQ603	21BB45M8603
EAN	 4 008423 872408	 4 008423 853223	 4 008423 875539

Cub Cadet®





XZ
ENDURO SERIES™



PRO Z SERIES


**MASSIVE
POWER,
TIGHTEST TURN**

ZERO-TURNS


Cub Cadet, the proven innovator of zero-turn technology, has created the industry's strongest line up of zero-turn riders. Our leading 360° turning technology lets you easily mow around obstacles with incredible confidence, making every mowing manoeuvre more efficient. And with models that feature four-wheel steering, you enjoy increased stability, control and faster cutting time.

XZ1


ENDURO SERIES™



DRIVING FORWARD




TURNING TO THE RIGHT



TURNING TO THE LEFT



DRIVING REVERSE



EXECUTING A ZERO-TURN



3-in-1
OPTION

POWERED BY
Cub Cadet

XZ1 107

Cutting width:	107 cm / 42"
Mowing area:	10,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet OHV
Engine displacement:	547 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	8 positions
Model number:	17DMCAC603



3-in-1
OPTION

Powered by
Kawasaki

XZ1 127

Cutting width:	127 cm / 50"
Mowing area:	11,500 m ² /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki OHV, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	8 positions
Model number:	17CICACQ603



3-in-1
OPTION

Powered by
Kawasaki

XZ1 137

Cutting width:	137 cm / 54"
Mowing area:	12,500 m ² /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki OHV, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	8 positions
Model number:	17CICACW603

PRECISE PERFORMANCE WITH LAP BAR TECHNOLOGY

Built strong with heavy-duty components and high-performance commercial-grade engines, the XZ Series delivers dependability and the professional results you and your customers demand.



DURABILITY

With a reinforced steel frame and chassis and a heavy-duty fabricated front axle.




EASY ENTRY FRAME

A deep and wide frame makes getting on and off your XZ1 straight forward.



LEVER WITH SOFT GRIP

Soft grip features make the work easier and more comfortable.



COMFORT SEAT WITH ARMRESTS

Ideal for comfortable, fatigue-free working (XZ1 127 and XZ1 137).



LEGROOM

Generous legroom plus a low seat position make for fatigue-free working.



POWERFUL MOWING DECK

The heavy-duty mowing deck has been designed for long-term use. The cutting pattern was improved by increasing blade overlap. Available on the XZ Series.

Cub Cadet[®]

XZ2
ENDURO SERIES[™]



STRENGTH, EASE AND VERSATILITY.

Feature for feature, the XZ2 gives you more. Zero-Turn handling combined with the ease of steering-wheel control and four-wheel steering makes for unmatched stability and unprecedented versatility. An unbeatable combination, with undeniably excellent performance. Plus incredible durability to last for many years to come.



3-in-1
OPTION

POWERED BY
Cub Cadet

XZ2 107i

Cutting width:	107 cm / 42"
Mowing area:	10,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet OHV EFI engine, V-TWIN dual cylinder
Engine displacement:	679 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	8 positions
Model number:	17AWCBYS603



3-in-1
OPTION

POWERED BY
Cub Cadet

XZ2 117i

Cutting width:	117 cm / 46"
Mowing area:	10,500 m ² /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet OHV EFI engine, V-TWIN dual cylinder
Engine displacement:	679 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	8 positions
Model number:	17AWCBYT603




3-in-1
OPTION

Powered by
Kawasaki


XZ2 127

Cutting width:	127 cm / 50"
Mowing area:	11,500 m ² /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki OHV, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	8 positions
Model number:	17AICBYQ603



COMFORTABLE SEAT

The seat and backrest is specially designed for comfortable, fatigue-free working, even for extended periods.



ADJUSTABLE STEERING COLUMN

All XZ2 are equipped with a quick adjustable steering column to perfectly suit all operator heights.




ELECTRIC START BUTTON

A convenient and reliable way to start your engine. Available on XZ2 107i and XZ2 117i.



CUB CADET V-TWIN EFI ENGINE

For the first time, the XZ2 107i and XZ2 117i models feature an engine manufactured by Cub Cadet. The two-cylinder engine comes with exceptional performance and efficiency, saving fuel and keeping maintenance costs low.



FLOATING CUTTING DECK

The floating deck follows the contours of the ground for superior cutting, providing a smoother and more uniform look.



COLLECT OR MULCH

Although the XZ2 are exceptional mulchers, collection is an option with a 200 l twin bag.

Cub Cadet[®]

XZ3
ENDURO SERIES™



ZERO-TURNS. INFINITE STRENGTH.

High-performance meets practicality for one strong rider.

The Cub Cadet XZ3 122 has a heavy-duty, fabricated 122 cm / 48" deck with the versatility to mow around fences and trees. The easy-to-see centrally mounted deck maximises mowing accuracy in corners and under low obstacles. A low centre of gravity and wide wheelbase allow the machine to glide over uneven ground and still cut in a completely straight line across hills and slopes. Tough terrain and steep hills are no problem with this added traction and control.

The advanced mulching technology incorporated in this machine re-circulates the airflow around the cutting deck delivering effective and efficient mulching capabilities. A superior mulcher.



HYDROSTATIC

DUAL HYDROSTATIC TRANSMISSION

The dual hydrostatic transmission provides you with optimal manoeuvrability. Available on the XZ Series.

SYNCHRO STEER® TECHNOLOGY



UNBEATABLE MANOEUVRABILITY AND UNMATCHED CLIMBING ABILITY

Our unique Zero-Turn riders with a traditional steering wheel provide you with the amazing manoeuvrability of a conventional Zero-Turn but with full control of the front wheels.

Steering and drive are perfectly synchronised to ensure the exact speed and rotating direction of each rear wheel, whatever the position of the front wheels. This revolutionary technology is available for the XZ2 and XZ3 Series.




XZ3 122

Cutting width:	122 cm / 48"
Mowing area:	11,000 m ² /h
Grass bag capacity:	300 l optional
Engine:	Kawasaki OHV, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions
Model number:	17BIDGHB603



ADJUSTABLE STEERING COLUMN

The XZ3 is equipped with an adjustable steering column ensuring you find the perfect position.



COMFORTABLE SEAT WITH ARMRESTS

The high-back seat with armrests ensures that your work will be done in comfort.



PNEUMATIC FRONT WHEELS

Controllable pneumatic front wheels which support the Zero-Turn of your XZ3.



ROUNDED MOWING DECK SENSING ROLLERS

Prevent damage to the turf when cornering tight bends.



STEERING WHEEL

A soft grip steering wheel for great control, in tough conditions.



LARGE SIDE EJECTION DEFLECTOR

Helps spread the cuttings over a large area.

XZ1 107




XZ1 127

ENGINE		
Engine type	Cub Cadet OHV	Kawasaki OHV
Engine displacement	547 cm ³	726 cm ³
Rated power	12.5 kW / 2,300 min ⁻¹	12.0 kW / 2,400 min ⁻¹
Cylinders	Single	V-TWIN dual cylinder
Tank volume (capacity)	11.4 l	11.4 l
Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
DRIVE SYSTEM		
Transmission	Dual Hydrostatic	Dual Hydrostatic
Control	Lap bars	Lap bars
Cruise control	-	-
CUTTING SYSTEM		
Mowing area in m ² /h	10,000	11,500
Cutting width	107 cm / 42"	127 cm / 50"
Cutting height (min-max)	38–100 mm	38–100 mm
Cutting options	3-in-1 Option	3-in-1 Option
Number of blades	2	3
Deck engagement	Electric PTO	Electric PTO
Deck height positions	8	8
Deck wheels	2	4
Wash nozzle/Mulch Kit	Standard/Standard	Standard/Standard
DISCHARGE SYSTEM		
Bag (capacity in l)/accessory no.	200 l optional/(19C70020100)	200 l optional/(19A70043100)
Grass deflector	Standard	Standard
FRAME		
Front axle	Steel	Steel
Front bumper/rear bumper	-/-	-/-
Turning circle (cm)	0 cm	0 cm
Wheel size (f/r)	11" x 4" / 18" x 8.5"	13" x 5" / 18" x 9.5"
Wheel bearings	Ball bearings	Ball bearings
ELECTRICAL SYSTEM		
Battery	12 V / 230 CCA	12 V / 230 CCA
Headlights	-	-
Hour metre/service minder	Standard	Standard
Safety systems	Operator presence	Operator presence
COMFORT		
Seat type	High back	High back with armrests
Seat adjustment	Quick adjuster lever	Quick adjuster lever
Steering wheel	2-way adjustable lap bars with comfort grips	2-way adjustable lap bars with comfort grips
Utility bin	Standard	Standard
Mow in reverse (RevTEK™)	-	Standard
DIMENSIONS		
LpA/LwA/LwAg (dB)	88/98/100	93/103/105
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	203 cm / 134 cm / 100 cm	213 cm / 154 cm / 100 cm
Net weight	228 kg	253 kg
Model number	17DMCACS603	17CICACQ603
EAN	 4 008423 875492	 4 008423 857696

XZ1 137



XZ2 107i

XZ2 117i

ENGINE			
Engine type	Kawasaki OHV	Cub Cadet OHV EFI engine	Cub Cadet OHV EFI engine
Engine displacement	726 cm ³	679 cm ³	679 cm ³
Rated power	12.5 kW / 2,500 min ⁻¹	13.1 kW / 2,700 min ⁻¹	13.1 kW / 2,700 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4 l	10.5 l	10.5 l
Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
DRIVE SYSTEM			
Transmission	Dual Hydrostatic	Dual Hydrostatic	Dual Hydrostatic
Control	Lap bars	Dual foot pedal control	Dual foot pedal control
Cruise control	-	Standard	Standard
CUTTING SYSTEM			
Mowing area in m ² /h	12,500	10,000	10,500
Cutting width	137 cm / 54"	107 cm / 42"	117 cm / 46"
Cutting height (min-max)	38–100 mm	38–100 mm	38–100 mm
Cutting options	3-in-1 Option	3-in-1 Option	3-in-1 Option
Number of blades	3	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	8	8	8
Deck wheels	4	2	4
Wash nozzle/Mulch Kit	Standard/Standard	Standard/Standard	Standard/Standard
DISCHARGE SYSTEM			
Bag (capacity in l)/accessory no.	200 l optional/(19A70043100)	200 l optional/(19C70020100)	200 l optional/(19C70020100)
Grass deflector	Standard	Standard	Standard
FRAME			
Front axle	Steel	Steel	Steel
Front bumper/rear bumper	-/-	-/-	-/-
Turning circle (cm)	0 cm	0 cm	0 cm
Wheel size (f/r)	13" x 5" / 18" x 9.5"	13" x 5" / 18" x 8.5"	13" x 5" / 18" x 8.5"
Wheel bearings	Ball bearings	Sleeve bearings	Sleeve bearings
ELECTRICAL SYSTEM			
Battery	12 V / 230 CCA	12 V / 230 CCA	12 V / 230 CCA
Headlights	-	-	-
Hour metre/service minder	Standard	Standard	Standard
Safety systems	Operator presence	Operator presence, brake switch, deck clutch switch	Operator presence, brake switch, deck clutch switch
COMFORT			
Seat type	High back with armrests	High back	High back
Seat adjustment	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
Steering wheel	2-way adjustable lap bars with comfort grips	Soft-Grip, tilt steering column	Soft-Grip, tilt steering column
Utility bin	Standard	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
LpA/LwA/LwAg (dB)	93/103/105	88/98/110	93/103/105
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	203 cm / 170 cm / 92 cm	203 cm / 116 cm / 118 cm	203 cm / 126 cm / 118 cm
Net weight	265 kg	234 kg	256 kg
Model number	17CICACW603	17AWCBYS603	17AWCUBY603
EAN	 4 008423 857689	 4 008423 881905	 4 008423 881912

XZ2 127

XZ3 122

ENGINE		
Engine type	Kawasaki OHV	Kawasaki OHV
Engine displacement	726 cm ³	726 cm ³
Rated power	12.0 kW / 2,400 min ⁻¹	12.3 kW / 2,750 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	10.5 l	Dual 8.5 litre fuel tanks
Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
DRIVE SYSTEM		
Transmission	Dual Hydrostatic	Dual Hydrostatic
Control	Dual foot pedal control	Dual foot pedal control
Cruise control	Standard	Standard
CUTTING SYSTEM		
Mowing area in m ² /h	11,500	11,000
Cutting width	127 cm / 50"	122 cm / 48"
Cutting height (min-max)	38–100 mm	25–102 mm
Cutting options	3-in-1 Option	3-in-1 Option
Number of blades	3	3
Deck engagement	Electric PTO	Electric PTO
Deck height positions	8	15
Deck wheels	4	2
Wash nozzle/Mulch Kit	Standard/Standard	Standard/Standard
DISCHARGE SYSTEM		
Bag (capacity in l)/accessory no.	200 l optional/(19A70043100)	Triple 300 l optional/(19A70040100)
Grass deflector	Standard	Standard
FRAME		
Front axle	Steel	Cast-iron
Front bumper/rear bumper	-/-	Standard/-
Turning circle (cm)	0 cm	0 cm
Wheel size (f/r)	13" x 5" / 18" x 9.5"	13" x 5" / 20" x 10"
Wheel bearings	Ball-bearings	Ball-bearings
ELECTRICAL SYSTEM		
Battery	12 V / 230 CCA	12 V / 230 CCA
Headlights	-	-
Hour metre/service minder	Standard	Standard
Safety systems	Operator presence, brake switch, deck clutch switch	Operator presence, brake switch, deck clutch switch
COMFORT		
Seat type	High back	High back with armrests and gel suspension
Seat adjustment	Quick adjuster lever	Quick adjuster lever
Steering wheel	Soft-Grip, tilt steering column	Soft-Grip, adjustable steering column
Utility bin	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard
DIMENSIONS		
LpA/LwA/LwAg (dB)	93/103/105	93/103/105
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	203 cm / 126 cm / 118 cm	194 cm / 124 cm / 118 cm
Net weight	265 kg	312 kg
Model number	17AICBYQ603	17BIDGHB603
EAN	 4 008423 882124	 4 008423 875461

ZERO-TURN ACCESSORIES



GRASS BAG

Twin bagger, 200 l, for XZ1 107 and XZ2 117i



Mod. no.: 19C70020100

Twin bagger, 200 l, for XZ1 127, XZ1 137 and XZ2 127



Mod. no.: 19A70043100

Triple bagger, 300 l, for XZ3 122



Mod. no.: 19A70040100



DOZER BLADE

Dozer blade for XZ3 and Z1



Mod. no.: 19B70044100



HITCH

Hitch for all XZ1 and XZ2 models



Mod. no.: 19A70025100





PRO SERIES

PRO ZERO-TURNS.

The new PRO SERIES Zero-Turns are the strongest and most efficient line up of commercial mowers. Proven by landscape professionals, Cub Cadet commercial Zero-Turn mowers provide the ultimate performance, comfort and durability. From frame to front yoke, the PRO Zero-Turns are designed to handle the serious demands of professionals.

**ULTIMATE POWER,
FOR PROFESSIONAL
REQUIREMENTS.**



"EXTREMELY DURABLE. IT'S A POWERHOUSE."



DURABILITY – HEAVIEST DUTY.

From the frame to the front yoke, every part of the PRO Z is designed to handle demanding conditions. The thickness of the cutting deck establishes a new industry standard, while an all round heavy-duty construction ensures this zero-turn will last for the long haul.

THE THICKEST, STRONGEST STEEL DECK IN THE INDUSTRY

Tackle the toughest conditions with the industry's only triple-7-gauge steel cutting deck: a 7-gauge deck shell with 7-gauge top and bottom reinforcements.

DURABILITY

- A** 1/4" leading rolled edge
- B** 5/16" steel side reinforcements
- C** 3/4" wear guard

QUALITY CUT

- D** Flexible rubber discharge chute
- E** High-lift Marbain® blades (with blade tip speed up to 18,500 fpm)
- F** Adjustable rear striping roller (optional on some models).

BEEFED-UP FRONT END (Z5 & Z7)

Absorb the impact of rough terrain with a new front-end construction featuring a best-in-class combination of axle, hub and yoke size.

- A** 2" x 3" pivoting front axle
- B** Isolation damping system
- C** 5" steel hubs
- D** 1/2" thick steel front yokes



**“VERY COMFORTABLE
AND EXTREMELY
STURDY AT
THE SAME TIME.”**

COMFORT — WORK HARD. RIDE EASY.

The PRO Z can take a beating, but your body shouldn't. Enjoy a smoother ride all day long with the enhanced comfort features of the PRO Z Series.



PRO Z AIR-RIDE SEAT

Our exclusive air-ride seat allows riders to adjust the seat firmness to their personal preference.

- A** Isolation damping system under the seat (PRO Z5 & Z7)
- B** Lumbar support
- C** EVC cushion (elastic vibration control)
- D** Angle adjustment
- E** Padded armrests



PIVOTING FRONT AXLE

A pivoting front axle allows the front end of the PRO Z to negotiate unseen terrain while protecting the quality of the cut. The frame and axle float as the PRO Z moves, allowing the deck to follow the terrain profile and avoid scalping. (PRO Z5 & Z7)



**KOHLER CONFIDANT
EFI EZT 740**


Z1 122

Thanks to its Kohler EFI engine, the new entry model in the PRO SERIES is both a powerhouse and ultra-economical, achieving fuel consumption up to 25% lower than that of engines with comparable performance. The Z1 122 needs far less fuel and less frequent refueling saving both time and money.

The extremely durable welded mowing deck with a cutting width of 122 cm / 48" helps you achieve pro-level cutting performance.


PRECISE PERFORMANCE WITH LAP BAR TECHNOLOGY

The two steering levers of the Z1 122 with floor-length comfort handles and integrated fixing brake optimise your comfort and steering precision for perfect results even in confined spaces.




TURNING TO THE LEFT:

To turn to the left, move the left drive control lever to the rear of the right lever. The greater the distance between the two levers, the more sharply the mower turns.




DRIVING FORWARD:

Slowly and evenly move both drive control levers forward. The mower will then start advancing. To slow down the tractor move the control levers to the rear to attain the desired speed or move the levers to the neutral position to stop the mower.




EXECUTING A ZERO-TURN:

To execute a zero-turn, move one control lever forward while simultaneously moving the other control lever back.



DRIVING REVERSE:

To drive the mower in reverse, slowly and evenly move both drive control levers to the rear.



TURNING TO THE RIGHT:

To turn to the right, move the right drive control lever to the rear of the left lever. The greater the distance between the two levers, the more sharply the mower turns.

Z1 122

MAKES HARD WORK EASY.

POWERED BY
KOHLER.



NEW

Cutting width:	122 cm / 48"
Mowing area:	12,000 m ² /h
Side discharge:	Standard
Engine:	KOHLER Confidant EFI EZT 740
Engine displacement:	747 cm ³
Drive:	Dual Hydrostatic
Transmission:	Hydrogear ZT3400
Max. speed:	9 mph (forward)/ 4 mph (reverse)
Cutting height adjustment:	17 positions

Model no.: 53RWEHRF603



**KOHLER CONFIDANT
EFI EZT 745**

Z1 137

The Zero-Turn Z1 137 exceeds your expectations, not your budget. Equipped with a powerful cutting deck, it always delivers professional-quality results.

Its outstanding speed, efficiency and comfort impress anybody who works daily with this Zero-Turn mower.

Z1 137

HIGHLY EFFICIENT.
UNBELIEVABLE
MANOEUVRABILITY.

POWERED BY
KOHLER.



A POWER MACHINE

With its fast speed of 9.5mph, the Z1 137 is at least twice as fast as a normal lawn tractor, excelling in efficiency

B MORE COMFORTABLE THAN EVER

High-comfort seat, suspension and non-slip controls guarantee safe and fatigue-free work

C MARKET-LEADING EFFICIENCY

25 % less fuel consumption with electronic fuel injection (EFI)

D STRONG AND ROBUST

Welded mowing deck with 137 cm / 54" cutting width for endless power

E EXTREMELY AGILE

The unique 360° turning circle technology helps you negotiate tight corners and obstacles easily

Cutting width:	137 cm / 54"
Mowing area:	13,500 m ² /h
Side discharge:	Standard
Engine:	KOHLER Confidant EFI EZT 745
Engine displacement:	747 cm ³
Drive:	Dual Hydrostatic
Transmission:	Hydrogear ZT3400
Max. speed:	9.5mph (forward)/4.5mph (reverse)
Cutting height adjustment:	17 positions

Model no.: 53BWEFJA603

Powered by
Kawasaki



**KAWASAKI OHV,
V-TWIN DUAL CYLINDER**

Z5 152

Unbelievable strength plus unbeatable comfort – the perfect combination for real professionals! The Zero-Turn Z5 152 delivers market-leading performance and quality with maximum efficiency. If you expect nothing but the very best from your mower, you'll be delighted with this, the ultimate Zero-Turn mower.

Z5 152

PERFECT IN EVERY DETAIL.



PIVOTING FRONT AXLE

A pivoting front axle allows the front end of the PRO Z to negotiate unseen terrain while protecting the quality of the cut. The frame and axle float as the PRO Z moves, allowing the deck to follow the terrain profile and avoid scalping.



Showing optional roller kit

THE THICKEST, STRONGEST STEEL DECK IN THE INDUSTRY

Tackle the toughest conditions with the industry's only 60 inch triple-7-gauge steel cutting deck: a 7-gauge deck shell with 7-gauge top and bottom reinforcements.

Cutting width:	152 cm / 60"
Recommended area capacity:	> 15,500 m ² /h
Mulching:	Standard
Engine:	Kawasaki OHV, V-TWIN dual cylinder
Capacity:	852 cm ³
Drive:	Dual Hydrostatic
Transmission:	Parker HTG 12 cc
Max. speed:	10 mph (forward) / 5 mph (reverse)
Cutting height adjustment:	17 positions
Steering Control:	Steering wheel with power steering

Model no.: 53AIHJUV603

Powered by
Kawasaki



**KAWASAKI OHV,
V-TWIN DUAL CYLINDER**

Z7 183

Amazing strength and unsurpassed comfort – the perfect combination for true professionals! The Z7 183 offers performance, quality and efficiency that puts other leading zero-turn mowers in the shade. This makes the Z7 183 the absolute top model that needs much less mowing time than any other product.

However much you demand from a mower, you will love it!

Z7 183

POWERFUL AND
EFFICIENT.



PRO Z AIR-RIDE SEAT

Our exclusive air-ride seat allows riders to adjust the seat firmness to their personal preference.



MAINTENANCE FREE SPINDLE

Slash downtime thanks to Cub Cadet's new spindle design. Completely sealed, dual double-row ball bearings make the spindle maintenance-free for its lifetime, and anti-friction washers prevent self-tightening, meaning easier blade maintenance.

Cutting width:	183 cm / 72"
Recommended area capacity:	> 18,000 m ² /h
Mulching:	Standard
Engine:	Kawasaki OHV
Capacity:	999 cm ³
Drive:	Dual Hydrostatic
Transmission:	Parker HTG 14 cc
Max. speed:	12 mph (forward)/6 mph (reverse)
Cutting height adjustment:	17 positions
Steering Control:	Steering wheel with power steering

Model no.: 53RIHKUY603

Z1 122

Z1 137











ENGINE		
Engine type	KOHLER Confidant EFI EZT 740	KOHLER Confidant EFI EZT 745
Engine displacement	747 cm ³	747 cm ³
Rated power	14.5 kW / 2,600 min ⁻¹	14.4 kW / 2,300 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	2 x 13 l	2 x 13 l
Drive	Dual Hydrostatic	Dual Hydrostatic
Transmission	Hydregear ZT3400	Hydregear ZT3400
Lubrication	Pressure oil lubrication	Pressure oil lubrication
CUTTING SYSTEM		
Mowing area in m ² /h	12,000	13,500
Cutting width	122 cm / 48"	137 cm / 54"
Cutting height (min-max)	26-127 mm	26-127 mm
Cutting options	2-in-1	2-in-1
Number of blades	3	3
Deck engagement	Electric PTO	Electric PTO
Deck height positions	17	17
Deck wheels	2	4 + 2 Nose
Mulch Kit	Standard	Standard
DISCHARGE SYSTEM		
Ejection type	Side discharge	Side discharge
Grass deflector	Standard	Standard
FRAME		
Front bumper/rear bumper	-/Standard	-/Standard
Turning circle	0 cm	0 cm
Wheel size (f/r)	13" x 6.5" / 23" x 10.5"	13" x 6.5" / 24" x 12"
Wheel bearings	Ball bearings	Ball bearings
ELECTRICAL SYSTEM		
Battery	230 CCA	230 CCA
Headlights	-	-
Hour metre/service minder	-	Standard
Safety systems	Rollover bar	Rollover bar
COMFORT		
Seat type	High back, adjustable	High back, adjustable
Seat adjustment	Quick adjuster lever	Quick adjuster lever
Steering wheel	2-way adjustable lap bars with comfort grips	Soft-Grip
Utility bin	-	-
Mow in reverse (RevTEK™)	Standard	Standard
Battery charger	-	-
DIMENSIONS		
LpA/LwA/LwAg (dB)	93/103/105	93/103/105
Vibration value body/K-Faktor	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-Faktor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Net weight	360 kg	360 kg
Model number	53RWEHRF603	53BWEFJA603
EAN	 4 008423 881936	 4 008423 874273

25 152

27 183

ENGINE		
Engine type	Kawasaki OHV	Kawasaki OHV
Engine displacement	852 cm ³	999 cm ³
Rated power	17.15 kW / 2,500 min ⁻¹	21.0 kW / 2,750 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	2 x 34 l	2 x 34 l with fuel gauge
Drive	Dual Hydrostatic	Dual Hydrostatic
Transmission	Parker HTG 12 cc	Parker HTG 14 cc
Lubrication	Pressure oil lubrication	Pressure oil lubrication
CUTTING SYSTEM		
Mowing area in m ² /h	15,500	18,000
Cutting width	152 cm / 60"	183 cm / 72"
Cutting height (min-max)	26-127 mm	26-127 mm
Cutting options	2-in-1	2-in-1
Number of blades	3	3
Deck engagement	Electric PTO	Electric PTO
Deck height positions	17	17
Deck wheels	2 + 2 Nose Roller	4 + 2 Nose + 1 deck rear roller
Mulch Kit	Standard	Standard
DISCHARGE SYSTEM		
Ejection type	Side discharge	Side discharge
Grass deflector	Standard	Standard
FRAME		
Front bumper/rear bumper	-/Standard	-/Standard
Turning circle	0 cm	0 cm
Wheel size (f/r)	15" x 6" / 24" x 12"	16" x 6.5" / 24" x 12"
Wheel bearings	Ball bearings	Ball bearings
ELECTRICAL SYSTEM		
Battery	230 CCA	230 CCA
Headlights	-	-
Hour metre/service minder	Standard	Standard
Safety systems	Rollover bar	Rollover bar
COMFORT		
Seat type	High back with armrests, adjustable	High back with armrests, adjustable
Seat adjustment	Quick adjuster lever	Quick adjuster lever
Steering wheel	Soft-Grip	Soft-Grip
Utility bin	-	-
Mow in reverse (RevTEK™)	Standard	Standard
Battery charger	-	-
DIMENSIONS		
LpA/LwA/LwAg (dB)	93/103/105	93/103/105
Vibration value body/K-Faktor	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-Faktor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Net weight	680 kg	732 kg
Model number	53AIHJUV603	53RIHKUY603
EAN	 4 008423 872415	 4 008423 881929

PRO SERIES ACCESSORIES

	SNOW CHAINS	
	Snow chains for Z1 0 037049 945603 Mod. no.: 490-241-0026	
	DOZER BLADE	
	Dozer blade for XZ3 and Z1 4 008423 881172 Mod. no.: 19B70044100	
	ELECTRIC DECK LIFT KIT	
	Electric deck lift for Z1 4 008423 881189 Mod. no.: 19B70045100	
	HEAVY DUTY LAWN STRIPING KIT	
	Heavy duty lawn striping Kit for Z1 0 043033 542109 Mod. no.: 19A70019100	
	Heavy duty lawn striping Kit for Z5 0 889021 121587 Mod. no.: 59A30052150	



PRO SERIES

7

WARRANTY

Cub Cadet offers a three year domestic user warranty across the entire range of garden machinery. This is great news for both customers and dealers, inspiring confidence in the quality and reliability of Cub Cadet products.

Details of terms and conditions can be found at www.cubcadet.co.uk.



Issue 1/2019

Text and photographs, specifications of dimensions and performance are composed with greatest care. The correctness of the information cannot be guaranteed, especially it is not guaranteed that the products comply with the images regarding colour, form and equipment or that the products comply with the proportion of the images. The engine horsepower information provided by the engine manufacturer is to be used for comparison purposes only. Amendments due to misprints or errors are reserved. Please see the operator's manual and the warning labels posted on the vehicle itself for more details.

Division of E. P. Barrus Ltd, Glen Way, Launton Road, Bicester, Oxfordshire. OX26 4UR.
Tel: 01869 363658 Fax: 08714 290936



CubCadet_uk



@CubCadet_uk

www.cubcadet.co.uk