

CONSUMER CATALOG 2016

-

Z-FORCE S

CubCadet

CubCadeL



What is power? Think about it for a second. How does it feel? What does it look like? You recognize it when you see it, don't you? When you hear it. Power is strength. Power is versatility. Power is the best of its class. Power is confident. Power is smarter, it's faster, it's one step ahead. Time and again. Power never tires. Power is built to last. Power is getting things done with less effort. Cub Cadet is pure power. Since 1961. Now the American legend is coming to Europe and it's here to stay. Be a part of it!

Cub Cadet. Pure Power.

OUR HISTORY KEEPS US GOING







Cub Cadet.





WALKS 6-7

1

2

4

6-7	Walks
8-9	Lawn Mower
10-13	Classic-Series
14-17	MySpeed
18-20	Triloy-Series
21	Wide Cut
22-27	Overview



MINI-RIDER

28-34 Mini-Rider 35 Overview



LAWN TRACTORS 3

36-39	Lawn Traktors
40-45	700-Series
46-51	900-Series
52-55	1000-Series SD
56-61	1000-Series RD
62-65	2000-Series SD
66-71	Accessories



Z-TURNS

72-73	Z-Turns
74-75	RZT
76-79	RZT-S
80-81	Z-Force SZ
82-85	Tank SZ





ROBOTICS

86-89 90-93 94-95

5

6

7

Lawnkeeper Robotic Lawn Mower Overview



UTV

96-103

UTV



CHORE

104-105Chore106-107Tiller108-109CSV110-111Scarifier



8 SNOW THROWER

112-113 114-117 118-119 120-121 122-123 124-125

Snow Thrower Three-stage

- Two-stage
- One-Stage
- Winter Accessories
- Overview



WALKS


Rugged durability meets expert engineering to deliver flawless performance. With features that boast incredible control, unmatched efficiency and increased comfort you'll get exactly what you need from your mower. And, as always, each model is guaranteed to deliver the pristine Cub Cadet cut mow after mow, season after season.





FIND THE RIGHT LAWN MOWER FOR YOUR GARDEN

The below chart gives you an overview of the maximum lawn size per cutting width, which you can mow within one hour. Decide whether you want to collect, mulch or discharge the grass clippings.

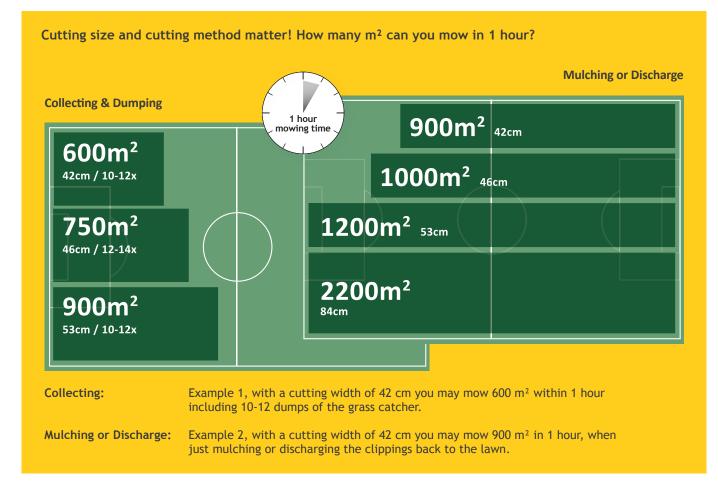

cubcadet.eu

1

WALKS



A large grass bag reduces the number of dumping. It saves time and reduces walks to your compost heap.

High rear wheels



High rear wheels roll over pot holes and unevenness in the lawn with ease. This results in a very comfortable handling and smooth driving.



Height adjustment

Self propelled mowers make mowing on slopy and large terrain much easier and effortless. Models with variable speed even adapt to your personal pace.

Electric start and Instart



Electric start gives you the highest comfort. Get your lawn mower started with the turn of a key or with pushing a button on Instart models.







A central height adjustment is a valuable feature to easily change the cutting height.

Variable Speed Control



With a variable drive speed system you will be the pacemaker, not your lawn mower.





CLASSIC SERIES – PERFECT CUT AND PERFECT BAGGING

High efficiency combined with the usual high quality of Cub Cadet - this is the strength of the Cub Cadet petrol lawn mowers.

Their tough construction ensures a long life cycle and the Cub Cadet OHV engine delivers the right power for your needs. With the Cub Cadet CLASSIC SERIES you have the choice between bagging and discharging the clippings. A mulch kit is available as accessory. Thus, you can optionally also mulch your lawn. Many ergonomical features help to get the job done while reducing stress - the easy-to-empty grass bag, the ergonomically formed handle, the convenient central height adjustment and the ball bearing wheels care for a high degree of comfort.

Ergonomic handle



Ergonomic handle gives you full control of the mower with the most ergonomic hand position. The handle is fully foldable for spacesaving storage and easy transport. Furthermore, it is height adjustable to fit the user's needs.

Central cutting height adjustment




It has never been easier to adjust the cutting height. Comfortably change the cutting height centrally with one lever, with the choice of 6 different positions.



A large grass bag reduces the number of dumping. It saves time and reduces walks to your compost heap.

STRONG AS STEEL. EASY AS IT GETS.

With the strength of a Classic Cub Cadet lawn mower or caster wheeler or caster wheels that allow you to lock into straight-line uniformity or unlock for additional maneuverability, you'll find a mower that fits your needs. Plus, the option to turn your machine into a side discharge, bagging or mulching mower adds versatility to your cutting experience.

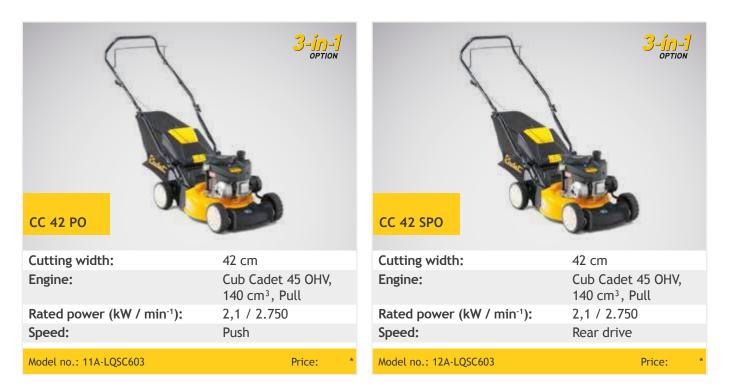

СС 46 РО		3-jn-1 OPTION	
Cutting width:	46 cm		
Engine:	Cub Cadet 55 OHV, 159 cm³, Pull		
Rated power (kW / min ⁻¹):	2,5 / 2.800		
Speed:	Push		
Model no.: 11A-TQKC603		Price: *	



ADDITIONAL FEATURES ON MODEL CC 53 SPO W



6 drive speeds at your disposal. The right speed for every situation.



With the caster wheels this mower gives you the highest maneouvrability and thus is perfect when there are many hindrances on the lawn such as bushes and trees.




WALKS

CLEVER AND ENVIRONMENTALLY CONSCIOUS

Everyone who likes mowing and perfectly grooming his lawn should have a mulching mower as mulching optimizes the nutrient cycle of the lawn. Our mulching mowers are perfect for the right lawn care. The grass is cut several times and then equally distributed onto the ground. There it can be used as a natural green fertilizer. You can save high amounts of fertilizers - this is good for the environment and for your moneybag, too.

Another benefit of a mulching mower is that there is no collecting or disposal of the grass clippings needed. You do not have to interrupt your work to empty the grass catcher. Thus, you will save time.

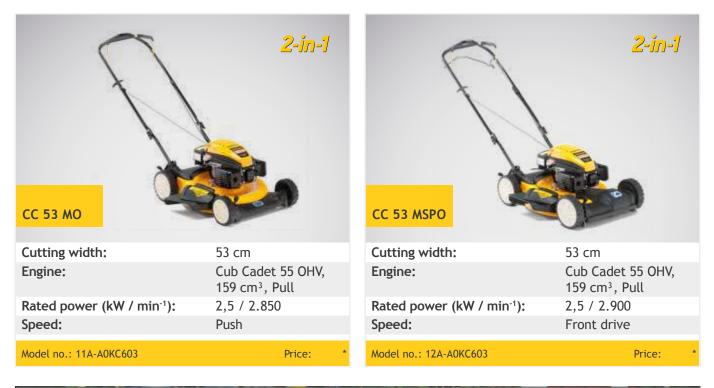





MYSPEED

THE STRONGEST WAY TO POWER WALK

The intuitive, state-of-the-art handle system of our classic models with variable speed let the mower drive with exactly your personal speed. Just grab the handle, start to walk and see how easy and comfortable mowing can be. The mower supports and follows exactly your speed.

With the additional side discharge option on CC 46/53 SPB V HW and their high rear wheels, plus a hard top catcher with fill indicator, these two models set a new standard.



The My Speed drive system

The drive system engages once the handle is pushed forward. If the operator walks faster, the handle is automatically pushed further forward and thus the speed of the mower increases.

If the operator walkes slower, the handle is pivoting back and the unit slows down. If the operator stops walking, the lever automatically moves to neutral and the unit stands still.


The mower speed automatically adjusts to the desired walking speed of the operator.

Tipp: Do not pivot the handle forward to engage the drive system. Just grap the handle and start to walk. The handle will then automatically pivot forward and the mower starts to move forward.




STRONG AS STEEL. EASY AS IT GETS.

Only Cub Cadet is pushing the boundaries of what walk-behind mowers can do. The self-propelled mowers unrivaled in their strength and power. And the one-of-a-kind driving system offers effortless and optimum maneuverability allowing you to cut around curved landscaping and hard-to-reach places.

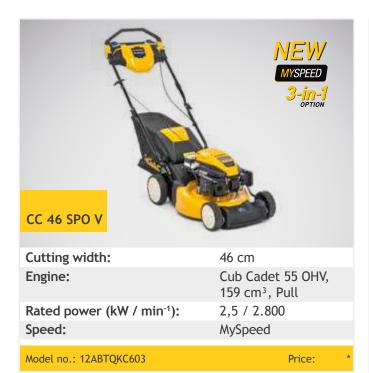



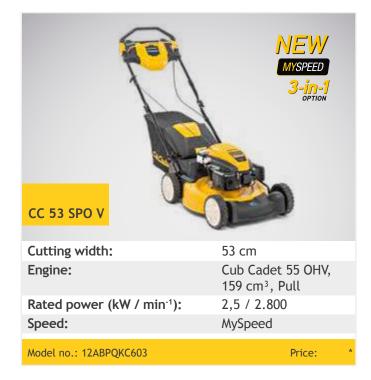





High wheels

Excellent manoeuvrability is a key factor on a good lawn mower. High rear wheels let the mower drive over lush grass and uneven terrain much smoother and with less effort.



4 in 1 system

You have the choice of four different methods. Bagging, mulching, rear discharge or side discharge. This gives you the freedom to select the ideal discharge solution for any condition.



Hard top bag with fill indicator

The dust proof hard top catcher with fill indicator cares for less dust during dry periods and the fill indicator flap signalizes when the grass catcher is full and needs to be emptied.



Central cutting height adjustment One grip to adjust all four wheels simultaneously. Less effort, less time, comfort on the highest level.



Height adjustable handle

The handle can be matched to your preferred height, providing a stressless and fatigue-proof mowing in comfort.



Easy starting B&S engine

The Briggs & Stratton engines with ReadyStart® technology and Starting Guarantee® let you start the mower with confidence and ease. The engine will start after 2 pulls. Promised.

WALKS

PLUS X AWARD [*]
2015 achieved for:
Innovation
High Quality
Design
Ease of Use
Functionality

PLUS X AWARD

The Plus X Award, prize for innovative technologies, sport and lifestyle products, is in its 12th year in 2015 and honours manufacturers for their quality advantage.

Cub Cadet wins, in 2015, the Plus X Award for the innovative drive system - MySpeed!



Model no.: 12ABTV5E603

Price:



Model no.: 12ABPV5L603





Price:




TRILOY-SERIES

UNIQUE DECK COMPOSED OF THREE MATERIALS

There are many good reasons for buying a Cub Cadet TRILOY series lawn mower. First of all, they are solid. The intelligent combination of a zinc coated steel mowing deck, aluminium front and rear ends plus polypropylene side impact protector panels will care for maximum durability.



The aluminium front and rear end provides the mower with the stiffness of a full size aluminium chassis.

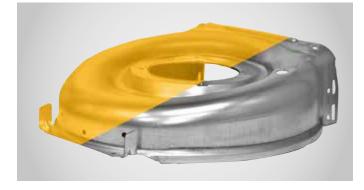

This paired with the Briggs & Stratton ReadyStart[®] engines and numerous function and comfort features makes the TRILOY mowers a real premium choice.

Quick release system



The ergonomically formed handle is height-adjustable in three positions to fit the user's needs. The oversized cone-style toothed quick release system is best in its class and very comfortable to operate.



The strong and reliable Briggs & Stratton ReadyStart® engine with Starting Guarantee will start after max. 2 pulls. Promised. OHV technique, electronic ignition, improved fuel management and pressurized lubrication are just some more technical highlights which make this engine series a first class choice.

MALKS 1



CUB CADET LV HANDLE SYSTEM


The innovative Cub Cadet LV low-vibration handle contains a gel of polymers and synthetic hydrocarbons which reduces drastically vibrations on the lawn mower's handle. On top of that the upper handle is covered with a soft grip to provide you with the highest comfort.

A large fan above the blade, perfectly harmonized with the cutting deck, the blade and grass catcher, is creating a much higher airflow than a conventional mower. This ensures a safe and reliable transport of the grass clippings into the grass catcher even in wet and high grass.

BOOSTE




CC 46 SPC V	NEW BOOSTED TO 3-in-1
Cutting width:	46 cm
Engine:	CC 55 OHV, 159 cm³, Pull
Rated power (kW / min ⁻¹):	2,5 / 2.800
Speed:	Rear drive
Model no.: 12BVK1KC603	Price:

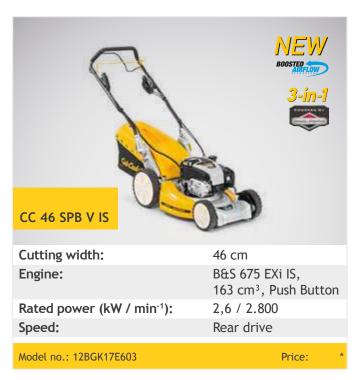







Reduced rolling resistance and higher durability than sleeve bearings due to high quality double ball bearings on all four wheels. This is another proof for a premium mower in every detail, even if they are not visible from outside.

Impact absorber system IMPACT ABSO


Impact absorber system to prevent damages to the plants and the mower.



STRONG FEATURES FOR THE LONG RUN

Cover more ground with less effort on larger properties, thanks to the strongest wide-area walk-behind your lawn has ever seen. You'll find incredible strength in its powerful engine. You'll witness ultimate efficiency thanks to a 84 cm steel cutting deck.



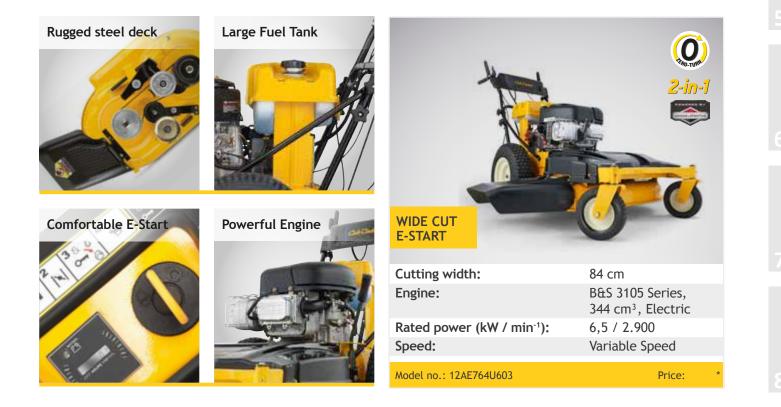

* Recommended retail price of the manufacturer

		CC 42 PO	CC 42 SPO	CC 46 PC
	Engine type	Cub Cadet 45 OHV	Cub Cadet 45 OHV	Cub Cadet 55
	Engine displacement	140 cm ³	140 cm ³	159 cm ³
ENGINE	Rated power (kW / min ⁻¹)	2,1 / 2.850	2,1 / 2.850	2,5 / 2.850
	Engine start	Pull	Pull	Auto Choke
	Tank volume (capacity) (l)	1,0	1,0	1,0
TEM	Drive	Push	Rear-wheel-drive	Push
DRIVE SYSTEM	Number of speeds	-	1	-
DRIV	Speed (max)	-	3,6 km/h	-
	Mowing area in m²/h	600	650	700
	Cutting deck (material)	Steel	Steel	Steel
	Cutting width (cm)	42	42	46
×	Cutting options	3 in 1 Option	3 in 1 Option	3 in 1 Optic
SYSTE	Cutting height adjustment	6 Positions / central	6 Positions / central	6 Positions / ce
CUTTING SYSTEM	Cutting height (min-max)	28-92 mm	28-92 mm	28-92 mm
9	Bagging	Standard	Standard	Standard
	Mulching plug	available as accessory	available as accessory	available as acc
	Side discharge	-	-	-
	Rear discharge without collector	Standard	Standard	Standard
Ŋ	Gras catcher type	Soft bag	Soft bag	Soft bag

	Cutting width (cm)	42	42	46
N	Cutting options	3 in 1 Option	3 in 1 Option	3 in 1 Option
SYSTE	Cutting height adjustment	6 Positions / central	6 Positions / central	6 Positions / central
CUTTING SYSTEM	Cutting height (min-max)	28-92 mm	28-92 mm	28-92 mm
CU	Bagging	Standard	Standard	Standard
	Mulching plug	available as accessory	available as accessory	available as accessory
	Side discharge	-	-	-
	Rear discharge without collector	Standard	Standard	Standard
U	Gras catcher type	Soft bag	Soft bag	Soft bag
BAGGING	Gras catcher (capacity) (l)	60	60	60
ß	Bag full indicator	Yes	Yes	Yes
WHEELS	Wheels (F/R) (mm)	180 / 200	180 / 200	180 / 200
WHE	Double ball bearings	Standard	Standard	Standard
	Washing nozzle	Standard	Standard	Standard
ч	Handle type	Ergonomic	Ergonomic	Ergonomic
COMFORT	Foldable handle	Standard	Standard	Standard
Ŭ	Height adjustable handle	Standard	Standard	Standard
	Soft grip on the handle	-	-	-
	LpA / LwA / LwAg (dB)	84 / 94 / 96	84 / 94 / 96	84 / 94 / 96
DIMENSIONS	Vib. value hand-arm / (K-factor)	5 / 1,5 m/s ²	5 / 1,5 m/s ²	5 / 1,5 m/s²
DIMEN	Dimensions (L / W / H) (cm)	150 / 46 / 114	155 / 49 / 98,5	155,9 / 49 / 114
	Weight net (kg)	28	31	28
	Model number	11A-LQSC603	12A-LQSC603	11A-TQKC603
	EAN	4 008423 857580	4 008423 857597	4 008423 857603
	Price*			

cubcadet.eu

CC 53 MO	CC 53 MSPO	CC 53 SPO W
Cub Cadet 55 OHV	Cub Cadet 55 OHV	Cub Cadet 60 OHV
159 cm ³	159 cm ³	195 cm ³
2,5 / 2.850	2,5 / 2.900	3,3 / 2.850
Pull with Auto Choke	Auto Choke	Auto Choke
0,9	0,9	1,1
Push	Front-wheel-drive	Rear-wheel-drive
-	1	6
-	3,6 km/h	2,8 - 4,5 km/h
1000	1000	950
Steel	Steel	Steel
53	53	53
2 in 1	2 in 1	3 in 1
9 Individual	9 Individual	6 Individual front / central rear
35-100 mm	35-100 mm	28-92 mm
-	-	Standard
Standard	Standard	Standard
Standard	Standard	Standard
-		Standard
-	-	Soft bag
		70
Yes	Yes	Yes
180 / 200	200 / 200	180 / 200
Standard	Standard	Standard
-	-	Standard
Ergonomic	Ergonomic	Ergonomic
Standard	Standard	Standard
-	-	Standard
mold injected grip	mold injected grip	mold injected grip
86 / 96 / 98	86 / 96 / 98	86 / 96 / 98
5 / 1,5 m/s²	5 / 1,5 m/s²	5 / 1,5 m/s²
26	26	37
11A-A0KC603	12A-A0KC603	12AQC6J3603
4 008423 859331	4 008423 859348	4 008423 858204

Cub	Cade	~ _	
to the off		100	STATISTICS IN CONTRACT

		CC 46 SPO V	CC 46 SPOE V	CC 53 SPO V
	Engine type	Cub Cadet 55 OHV	Cub Cadet OHV 55 OHV	Cub Cadet 55 OHV
	Engine displacement	159 cm ³	159 cm ³	159 cm ³
ENGINE	Rated power (kW / min ⁻¹)	2,5 / 2.850	2,5 / 2.850	2,5 / 2.850
	Engine start	Auto Choke	Electric Start	Auto Choke
	Tank volume (capacity) (l)	1,0	1,0	1,0
ТЕМ	Drive	Rear-wheel-drive	Rear-wheel-drive	Rear-wheel-drive
DRIVE SYSTEM	Number of speeds	1	1	1
DRIV	Speed (max)	0 - 3,6 km/h	0 - 3,6 km/h	0 - 3,6 km/h
	Mowing area in m²/h	750	750	950
	Cutting deck (material)	Steel	Steel	Steel
	Cutting width (cm)	46	46	53
M	Cutting options	3 in 1 Option	3 in 1 Option	3 in 1 Option
SYSTE	Cutting height adjustment	6 Positions / central	6 Positions / central	6 Positions / central
CUTTING SYSTEM	Cutting height (min-max)	28-92 mm	28-92 mm	28-92 mm
ß	Bagging	Standard	Standard	Standard
	Mulching plug	available as accessory	available as accessory	available as accessory
	Side discharge	-	-	-
	Rear discharge without collector	Standard	Standard	Standard
ט	Gras catcher type	Soft bag	Soft bag	Soft bag
BAGGING	Gras catcher (capacity) (l)	60	60	70
8	Bag full indicator	-	-	-
WHEELS	Wheels (F/R) (mm)	180 / 200	180 / 200	200 / 200
IΗΛ	Double ball bearings	Standard	Standard	Standard
	Washing nozzle	Standard	Standard	Standard
RT	Handle type	MySpeed	MySpeed	MySpeed
COMFORT	Foldable handle	Standard	Standard	Standard
0	Height adjustable handle	Standard	Standard	Standard
	Soft grip on the handle	-	-	-
	LpA / LwA / LwAg (dB)	84 / 94 / 96	84 / 94 / 96	86 / 96 / 98
DIMENSIONS	Vib. value hand-arm / (K-factor)	5 / 1,5 m/s ²	5 / 1,5 m/s²	5 / 1,5 m/s ²
DIMEI	Dimensions (L / W / H) (cm)		150 / 49 / 114	162 / 58 / 114
	Weight net (kg)	31	35	34
	Model number	12ABTQKC603	12ACTQ\$7603	12ABPQKC603
	EAN	4 008423 866148	4 008423 866247	4 ¹ 008423 ¹¹ 866131 ¹¹
	Price*			

5 E Series, Ready Start 150 cm ³ 2,2 / 2.800 Pull 1,0	CC 53 SPOE V HW Cub Cadet 55 OHV ES 159 cm³ 2,5 / 2.800
150 cm ³ 2,2 / 2.800 Pull 1,0	159 cm ³
2,2 / 2.800 Pull 1,0	
Pull 1,0	2,5 / 2.800
1,0	
	Electric Start
	1,0
Rear-wheel-drive	Rear-wheel-drive
1	1
0 - 3,6 km/h	0 - 3,6 km/h
950	950
Steel	Steel
53	53
4 in 1	4 in 1
Positions / central	6 Positions / central
28-92 mm	28-92 mm
Standard	Standard
t bag with hard top	Soft bag with hard top
70	70
Standard	Standard
200 / 280	200 / 280
Standard	Standard
Standard	Standard
MySpeed	MySpeed
Standard	Standard
Standard	Standard
-	
86 / 96 / 98	86 / 96 / 98
5 / 1,5 m/s²	5 / 1,5 m/s²
	162 / 58 / 114
	36
	12ACPVS7603
36 12ABPV5L603	

		CC 46 SPC V	CC 46 SPB V IS
	Engine type	CC 55 OHV, Ready Start	B&S 675 EXi IS Series, Ready Start
	Engine displacement	159 cm ³	163 cm ³
ENGINE	Rated power (kW / min ⁻¹)	2,5 / 2.800	2,6 / 2.800
-	Engine start	Auto Choke	Push button
	Tank volume (capacity) (l)	1,1	1,0
TEM	Drive	Rear-wheel-drive	Rear-wheel-drive
DRIVE SYSTEM	Number of speeds	6	6
DRIV	Speed (max)	2,8 - 4,5 km/h	2,8 - 4,5 km/h
	Mowing area in m ² /h	750	750
	Cutting deck (material)	Zinc-coated steel / aluminium	Zinc-coated steel / aluminium
	Cutting width (cm)	46	46
N	Cutting options	3 in 1	3 in 1
CUTTING SYSTEM	Cutting height adjustment	6 Positions / central	6 Positions / central
DNILLING	Cutting height (min-max)	28-92 mm	28-92 mm
C	Bagging	Standard	Standard
	Mulching plug	Standard	Standard
	Side discharge	-	-
	Rear discharge without collector	Standard	Standard
U	Gras catcher type	Soft bag with hard top	Soft bag with hard top
BAGGING	Gras catcher (capacity) (l)	75	75
В	Bag full indicator	Standard	Standard
WHEELS	Wheels (F/R) (mm)	200 / 280	200 / 280
WHI	Double ball bearings	Standard	Standard
	Washing nozzle	Standard	Standard
Ł٢	Handle type	Ergonomic	Ergonomic
COMFORT	Foldable handle	Standard	Standard
Ū	Height adjustable handle	Standard / 3 positions	Standard / 3 positions
	Soft grip on the handle	Standard	Standard
	LpA / LwA / LwAg (dB)	84 / 94 / 96	84 / 94 / 96
DIMENSIONS	Vib. value hand-arm / (K-factor)	5 / 1,5 m/s²	5 / 1,5 m/s²
DIMEN	Dimensions (L / W / H) (cm)	155 / 49 / 114	
	Weight net (kg)	40	46
	Model number	12BVK1KC603	12BGK17E603
	EAN	4 008423 866162	4 ¹ 008423 ¹ 865523 ¹
	Price*		

 CC 53 SPC V	CC 53 SPB V IS	WIDE CUT E-START	
CC 60 OHV, Ready Start	B&S 775 EX Series DOV, Ready Start	B&S 3105 Series	
195 cm ³	161 cm ³	344 cm ³	
3,3 / 2.800	2,6 / 2.800	6,5 / 2.900	1
Pull	Push button	Electric Start	KS
1,1	1,0	7,5	WALKS
Rear-wheel-drive	Rear-wheel-drive	Rear-wheel-drive	Š
6	6	4 fwd. / 1 rev.	
2,8 - 4,5 km/h	2,8 - 4,5 km/h	1,8 - 5,7 km/h	
950	950	2000	
Zinc-coated steel / aluminium	Zinc-coated steel / aluminium	Steel	
53	53	84	
3 in 1	3 in 1	2 in 1	
6 Positions / central	6 Positions / central	8 Positions / central	
28-92 mm	28-92 mm	25-100 mm	
Standard	Standard		
Standard	Standard	Standard	
-	-	Standard	
Standard	Standard	-	
Soft bag with hard top	Soft bag with hard top	-	
80	80	-	
Standard	Standard	-	
200 / 280	200 / 280	200 / 400	
Standard	Standard	Standard	
 Standard	Standard	Standard	
Ergonomic	Ergonomic	Standard	
Standard	Standard	Standard	
Standard / 3 positions	Standard / 3 positions	-	
Standard	Standard	Standard	
86 / 96 / 98	86 / 96 / 98	88 / 98 / 100	
5 / 1,5 m/s²	5 / 1,5 m/s²	5 / 1,5 m/s²	
50	53	120	
12BVQ5J3603	12BGQ56J603	12AE764U603	
4 008423 865516	4 008423 865530	4 008423 835243	
4 ¹¹ 008423 ¹¹ 865516 ¹¹	4 ¹¹ 008423 ¹¹ 865530 ¹¹	4 ¹¹ 008423 ¹¹¹ 835243 ¹¹	

MINI-RIDER

The Cub Cadet MINI-RIDERS delivers the same strength, durability and perfect cut as our larger riders; but in a more compact design. Plus, you have the choice between two models with transmatic and one model with hydrostatic drive. The Cub Cadet MINI-RIDERS are more than compact; they comfortable, convenient and unmatched in quality.





MINI-RIDER

TRULY UNIQUE. TRULY COMPACT.

Modern design, versatility and comfortable mowing - just three of many assets of the Cub Cadet MINI-RIDER. The compact and manoeuvrable Cub Cadet MINI-RIDER models with electric start are equipped with a powerful 420 cm³ Cub Cadet engine. Thanks to their space-saving design, these Cub Cadet MINI-RIDER models do not need much more space in your garage than a conventional walk behind mower. You want the grass clippings to be collected, discharged or mulched, the Cub Cadet CC 114 TA or new CC 114 HA will be your choice. If you are looking for an excellent mulching mower with the oportunity to side-discharge the clippings the CC 114 TD is the perfect choice. The CC 114 HA impress with a luxurious hydrostatic drive.



The Transmatic transmission allows shift-on-the-go speed control. Simply choose the driving direction, set the desired basic speed and start mowing. On the Cub Cadet ride-on mower CC 114 TA and CC 114 TD, you have the choice of 6 forward and 6 reverse speeds.





The german garden magazine "Familienheim und Garten" test the MINI-RIDER CC 114 TA and end's with the test verdict: **good** Good performance and versatility impressed the test persons. The Electric Start and the large fuel tank of approx. 5l allows long terms of mowing without refill of the fuel tank.





Large tires Gentle to your lawn and smoother on uneven terrain.



Telescoping steering column

The soft-grip steering wheel gives maximum comfort. The steering shaft is height adjustable to suit operators of any height.



Adjustable seat

With the adjustable seat the MINI-RIDER CC 114 HA can be matched to your personal and most convenient seating position.



Step-through frame With soft rubber foot pads, for easy access and comfortable foot rest.



4,9 | fuel tank

The large fuel tank with fuel indicator gives you the freedom to mow your lawn in one full cycle without a tankstop.



Cutting height adjustment & PTO clutch

The cutting height can easily be adjusted in 5 positions from 38 mm to 95 mm and with the individual deck clutch lever the cutting deck can be switched on and off. Both levers are located ergonomically on the right side of the seat.



THE SIZE YOU NEED WITH THE POWER YOU WANT

The new Cub Cadet MINI-RIDER CC 114 HA delivers the same strength, durability and cutting performance as the larger rider models; but in a more compact design. With the luxurious hydrostatic transmission and the exclusiv steering-wheel system you have optimum control during the operation.



Intelligent Parking Assistance (IPA)

With the brand new IPA-System it will be much easier to parking your CC 114 HA in your garage or summer house.

The intelligent system decrease the speed of your MINI-RIDER of 50 % and gives you a much safety feeling and much precision if you drive backwards.

RevTEK Technology

RevTEK - Reverse Mowing Technology: To mow in reverse, when no kids or animals are around. This cares for more safety.

СС 114 НА		NEW 3-in-1
Cutting width:	76 cm	
Engine:	CC OHV, 1 Cylinder, 420 cm ³	
Rated power (kW / min ⁻¹):	8,2 / 2.900	
Speed:	Hydrostatic	
Model no.: 13A221HD603		Price: *



Hydrostatic drive system

The CC 114 HA is equipped with a luxurious hydrostatic drive system. With the parking brake at the left side and the one-pedal foot control on the right side.



Super grip pedals On the CC 114 HA you find only super grip pedals. If their bad conditions this pedals will give you the best grip during the operation.



Comfortable Professional Grade Seat and Steering wheel for premium usage.



Telescoping steering column You can easily adjust the height of the steering column to suit to every operators height.



Lights LED-Lights for safety operation during the dawn.



Front bumper To prevent damage of your MINI-RIDER. The Front bumper give it more durability.





The Transmatic transmission allows shift-on-the-go speed control. Simply choose the driving direction, set the desired basic speed and start mowing. On the Cub Cadet ride-on mower CC 114 TA, you have the choice of 6 forward and 6 reverse speeds.



You have the choice between collecting, mulching and discharge with model CC 114 TA. Choice between mulching and side discharge with model CC 114 TD. Superior mulching, excellent collection and for spreading side discharge ability. What ever you choose, the MINI-RIDER can handle it.



200 l grass bag with hard top (model CC 114 HA), grips and fill indicator. It can be dumped from the drivers seat.

CC 114 TD	3-in-i option	СС 114 ТА
Cutting width:	76 cm	Cutting width:
Engine:	CC OHV, 1 Cylinder, 420 cm ³	Engine:
Rated power (kW / min ⁻¹):	8,2 / 3.000	Rated power (kW / min ⁻¹):
Speed:	Transmatic	Speed:
Model no.: 13B226JD603	Price: *	Model no.: 13B226HD603



MINI-RIDER 2

-		CC 114 TD	CC 114 TA	CC 114 HA
	Engine type	Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV
	Engine displacement	420 cm ³	420 cm ³	420 cm ³
	Rated power (kW / min ⁻¹)	8,2 / 3.000	8,2 / 2.900	8,2 / 2.900
ENGINE	Cylinders	Single	Single	Single
	Tank volume (capacity) (l)	4,9	4,9	4,9
	Lubrication	Fully pressurized automotive-style oil pump w/ spin-on oil filter	Fully pressurized automotive-style oil pump w/ spin-on oil filter	Fully pressurized automotive-style oil pump w/ spin-on oil filter
E E	Transmission	Transmatic	Transmatic	Hydrostatic
	Speeds	6 (f/r), shift-on-the-go	6 (f/r), shift-on-the-go	Infinitely variable
	Control	Foot pedal control	Foot pedal control	Foot pedal control
	Mowing area in m²/h	> 1.200	> 1.000	> 1.200
	Cutting width (cm)	76	76	76
ξ	Cutting height (min-max)	38 - 95 mm	38 - 95 mm	38 - 95 mm
	Cutting options	3 in 1 Option	3 in 1	3 in 1
	Number of blades	1	1	1
3	Deck engagement	Manual lever control	Manual lever control	Manual lever control
	Deck height positions	5	5	5
	Wash nozzle / mulching plug	Included	Included	Included
×	Bag (capacity in l) / accessory no	Optional 115 / 19A30014OEM	200	200
SYSTEM	Bag lever / Hardtop	- /-	over 2 fixed grips / plastic	over 2 fixed grips / plastic
ŝ	Bag full indicator / grass deflector	- / Standard	Standard / standard	Standard / standard
	Front axle	Steel	Steel	Steel
	Front bumper	-	Standard	Standard
	Turning radius (cm)	46	46	46
2	Wheel size (front/rear)	13" x 5" / 16" x 6,5"	13" x 5" / 16" x 6,5"	13" x 5" / 16" x 6,5"
	Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
	Easy entry frame	Yes	Yes	Yes
SYSTEM	Battery	12 V heavy-duty 275 cold crank amp	12 V heavy-duty 275 cold crank amp	12 V heavy-duty 275 cold crank amp
SYST	Headlights	-	-	LED
_	Safety systems	Neutral start, operator presence, brake pedal lock	Neutral start, operator presence, brake pedal lock	Neutral start, operator presence, brake pedal loci
	Seat type	Medium back	Medium back	Deluxe High Comfort Seat
2	Seat adjustment	Screw	Screw	Screw
	Steering wheel	Comfort	Comfort	Comfort
COMFORT	Mow in reverse (RevTEK™)	-	-	Yes
	Battery charger	196-967-678	196-967-678	196-967-678
	LpA / LwA / LwAg (dB)	88 / 98 / 100	88 / 98 / 100	88 / 98 / 100
	Vibration value body / (K-factor)	1 / 0,5 m/s ²	1 / 0,5 m/s ²	1 / 0,5 m/s ²
DIMENSIONS	Vib. value hand-arm / (K-factor)	5 / 1,5 m/s ²	5 / 1,5 m/s ²	5 / 1,5 m/s ²
	Dimensions (L / W / H) (cm)	157 / 85 / 112	225 / 86 / 112	225 / 86 / 112
5	Weight net (kg)	127	145	172
5	5			
5	Model number	13B226JD603	13B226HD603	13A221HD603

Price*



LAWN TRACTORS

a


Where strength meets comfort! Strength in every detail and a exceptional cutting and bagging performance to incedibly responsive handling.

Its perfect mowing performance, all-season versatility and strong construction stand up to just about anything.



WHAT IS THE RIGHT DECK SIZE FOR MY LAWN TRACTOR?

Cub Cadet lawn tractor deck sizes range from 76 cm to 137 cm and the correct deck size greatly depends on the amount of lawn to be mowed. The information below will help you to choose the right deck size for your needs.

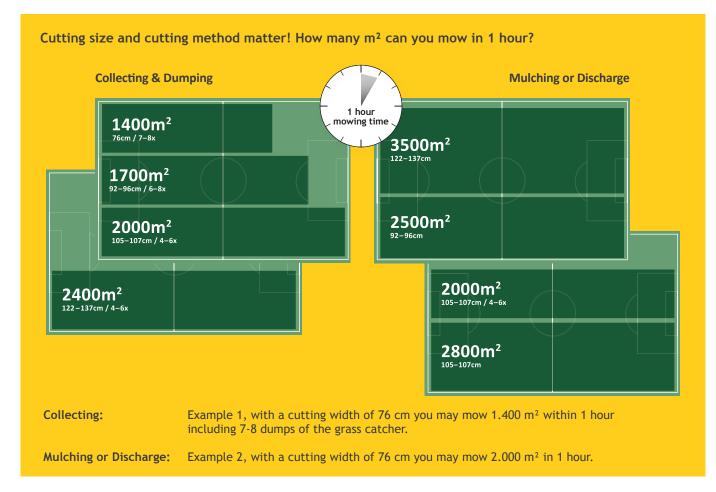

THE DIFFERENT TYPES OF DRIVE SYSTEMS



TRANSMATIC Transmission

Allows shift-on-the-go speed control. Simply choose the driving dire ction, set the desired basic speed with the speed shift lever on the dashboard and release the brake/clutch pedal. Push the pedal to slow down or press it full way forward to stop. By releasing the brake pedal, the tractor automatically resumes your preset speed.



AUTODRIVE[™] Transmission

Is maintenance free. It can be compared with the automatic transmission of a car. The speed can simply be adjusted with the foot pedal. With the gear selector lever you simply choose forward or reverse direction. You don't have to bother with clutching. Both hands remain on the steering wheel.



HYDROSTAT Transmission

Impresses by means of modern technology and luxury. Because of its self-lubricating hydro pump, it is of low maintenance and extremely sturdy. The particular feature of the Hydrostatic transmission is that you can control velocity as well as the forward and reverse speed continuously. No clutching or shifting is required. It offers a very smooth and exact drive. The 900 & 1000 Series lawn tractors are foot-pedal controlled, the 700 Series lawn tractors have either hand control (side discharge) or a foot pedal (rear discharge).



Ask.

700-SERIES

ENJOYABLE EXPERIENCE

Cub Cadet 700 Series lawn tractors with side discharge are extraordinary versatile. Their main feature is the ability to quickly cover large areas. No stopping is needed to empty the grass catcher - quite the contrary - you can mow a large area within a short time. Thanks to the easy-to-operate cutting height adjustment, Cub Cadet 700 Series lawn tractors with side discharge will achieve optimum cutting results - even on difficult ground. Furthermore, it is easy to attach accessories such as snow blades, lawn rollers or dump carts.



Steering Improvement of all lawn tractors (New Precision Gear Steering Technology) On all lawn tractors from Cub Cadet you will get a new feeling of comfort. We improved the steering of the lawn tractors. The brand new advance precision gear steering technology will support the operator during the work and make your powerful lawn tractor more efficient.







RevTEK - Reverse Mowing Technology: To mow in reverse, when no kids or animals are around. This cares for more safety.

Pivoting one-piece hood



The entire motor hood can be removed within seconds without the need for tools, for easy maintenance.




For more convenience and comfort.

Comfort Steering wheel



A 3-spoke soft grip steering wheel is standard on all our tractors.





All our rear discharge tractors are designed to transport the grass clippings into the grass catcher in the shortest way. All 700 SERIES rear discharge models feature a 240 l grass catcher. They are made of durable fabric for flexibility and for air passage to guarantee the air flow and perfect collection. The hard top controls dust and reduces noise. The convenient handle makes emptying from the operator seat comfortable and easy.

LAWN TRACTORS



Step-through frame



The sturdy step-through frame allows the user to mount or dismount the tractor with ease.



Pivoting steel or cast iron front axle. This keeps all four wheels on the ground also on uneven surface.



Cutting width:	96 cm
Engine:	CC OHV, 1 Cylinder, 420 cm ³
Rated power (kW / min ⁻¹):	7,8 / 2.800
Speed:	Transmatic

Model no.: 13H277DF603

Price:



NEW Kawasaki CC 716 KHG **Cutting width:** 107 cm Engine: Kawasaki OHV, V-Twin, 603 cm³ 9,5 / 2.700 Rated power (kW / min⁻¹): Speed: Hydrostat Model no.: 13HG79DG603 Price:





CC 714 TE

Engine:

Speed:

Cutting width:

Rated power (kW / min⁻¹):

Model no.: 13H277DE603

5-position height adjustment to easily change the cutting height (30-95 mm).

92 cm

420 cm³

7,8 / 2.800

Transmatic

CC OHV, 1 Cylinder,

Price:

Steel frame

CC 714 HE

Engine:

Speed:

Cutting width:

Rated power (kW / min⁻¹):

Model no.: 13H271DE603

All tractor frames are made of fully welded and powder coated rugged steel.















92 cm

420 cm³

7,3 / 2.600

Hydrostatic

Price:









DC	

		CC 714 TF	CC 714 HF
Engine ty	ре	Cub Cadet OHV	Cub Cadet OHV
Engine di	splacement	420 cm ³	420 cm ³
	ver (kW / min-1)	7,8 / 2.800	7,8 / 2.800
Cylinders		Single	Single
Tank volu	me (capacity) (l)	3,8	3,8
Lubricatio		Fully pressurized automotive-style oil pump w/ spin-on oil filter	Fully pressurized automotive-style oil pump w/ spin-on oil filter
Transmiss	ion	Transmatic	Hydrostatic
Speeds		7 (f/r), shift-on-the-go	Infinitely variable
Control		Foot pedal control	Manual lever control
Cruise co	ntrol	-	-
-	rea in m²/h	> 1.500	> 1.500
Cutting w		96	96
_	eight (min-max)	30 - 95 mm	30 - 95 mm
Cutting of	•	3 in 1 Option	3 in 1 Option
Number of		2	2
Deck enga		- Manual lever control	- Manual lever control
	ht positions	5	5
Deck whe	•	2	2
	zle / mulching plug	- / OEM-190-116	- / Standard
	ity in l) / accessory no	Optional 200 / 196-180A699	Optional 200 / 196-180A699
Bag lever	/ hardtop	- /-	- /-
	dicator / grass deflector	- / Standard	- / Standard
Front axle		Steel	Cast-iron
Front bun		OEM-196A603	Standard
Turning ra		46	46
_	e (front/rear)	15" x 6" / 20" x 8"	15" x 6" / 20" x 8"
Wheel be		Sleeve bearings	Sleeve bearings
Easy entr	-	Standard	Standard
Battery	·	12 V heavy-duty 275 cold crank amp	12 V heavy-duty 275 cold crank amp
Headlight	s	Standard	Standard
-	onitor package	-	-
Safety sys		Neutral start, operator presence, brake pedal lock	Neutral start, operator presence, brake pedal lock
Seat type		Medium back	High back
Seat adju	stment	Screw	Quick adjuster lever
Steering v	vheel	Comfort	Comfort
Tool box /	′ 12 V plug	- / -	- / -
Mow in re	verse (RevTEK TM)	Standard	Standard
Battery cl	narger	196-967-678	196-967-678
LpA / LwA	/ LwAg (dB)	88 / 98 / 100	88 / 98 / 100
Vibration	value body / (K-factor)	1 / 0,5 m/s ²	1 / 0,5 m/s²
Vib. value	hand-arm / (K-factor)	5 / 1,5 m/s ²	5 / 1,5 m/s²
Dimensio	ns (L / W / H) (cm)	170 / 107 / 100	170 / 107 / 100
Weight ne	et (kg)	150	150
Model nu	nber	13H277DF603	13H279DF603
		4 008423 855111	4 008423 855098

CC 716 KHG	CC 714 TE	CC 714 HE	CC 716 KHN
Kawasaki OHV	Cub Cadet OHV	Cub Cadet OHV	Kawasaki OHV
603 cm ³	420 cm ³	420 cm ³	603 cm ³
9,5 / 2.700	7,8 / 2.800	7,8 / 2.800	9,5 / 2.700
V-Twin	Single	Single	V-Twin
3,8	3,8	3,8	3,8
Fully pressurized automotive- style oil pump w/ spin-on oil filter	Fully pressurized automotive- style oil pump w/ spin-on oil filter	Fully pressurized automotive- style oil pump w/ spin-on oil filter	Fully pressurized automotive- style oil pump w/ spin-on oil filter
Hydrostatic	Transmatic	Hydrostatic	Hydrostatic
Infinitely variable	7 (f/r), shift-on-the-go	Infinitely variable	Infinitely variable
Manual lever control	Foot pedal control	Dual direction foot pedal control	Dual direction foot pedal control
-	-	-	-
> 2.000	> 1.500	> 1.500	> 2.000
107	92	92	105
30 - 95 mm			
3 in 1 Option			
2	2	2	2
Manual lever control	Manual lever control	Manual lever control	Manual lever control
5	5	5	5
2	2	2	2
- / Standard	Standard / 196-749-678	Standard / 196-749-678	Standard / 196-749-678
Optional 200 / OEM-190-180A	240	240	240
- /-	Telescopic handle / Plastic	Telescopic handle / Plastic	Telescopic handle / Plastic
- / Standard	- / 196-750-678	- / 196-750-678	- / 196-750-678
Cast-iron	Steel	Steel	Cast-iron
Standard	OEM-196A603	OEM-196A603	Standard
46	46	46	46
15" x 6" / 20" x 8"	15" x 6" / 18" x 9,5"	15" x 6" / 18" x 9,5"	15" x 6" / 18" x 9,5"
Sleeve bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Standard	Standard	Standard	Standard
12 V heavy-duty 275 cold crank amp			
Standard -	Standard -	Standard -	Standard -
Neutral start, operator presence, brake pedal lock			
High back	Medium back	Medium back	High back
Quick adjuster lever	Screw	Screw	Quick adjuster lever
Comfort	Comfort	Comfort	Comfort
- / -	- / -	- / -	- / -
-	Standard	Standard	-
196-967-678	196-967-678	196-967-678	196-967-678
88 / 98 / 100	88 / 98 / 100	88 / 98 / 100	88 / 98 / 100
1 / 0,5 m/s ²			
5 / 1,5 m/s ²			
170 / 115 / 100	225 / 99 / 103	225 / 99 / 103	225 / 110 / 103
175	195	195	198
13HG79DG603	13H277DE603	13H271DE603	13HG71DN603
4 008423 868050		11 1 11 1111 1 111 1111 1 11 1 111 1 11 111	4 008423 868043

* Recommended retail price of the manufacturer



900-SERIES

STRENGTH MEETS PERFORMANCE


The 900 Series impress with the same strength, durability and comfort of the 700 Series with select premium features that deliver even higher levels of performance, power and convenience.








cubcadet.eu



RevTEK - Reverse Mowing Technology: To mow in reverse, when no kids or animals are around. This cares for more safety.



The advanced cutting system features a wide discharge chute and a deep deck for optimal grass lift and mulching capability.



Anti-scalping deck wheels to prevent damage to the turf especially on tight turns.

Foot pedals



Individual foot pedals for forward and reverse (on selected models).



CC 917 AF	NEW 3-in-1 ortion
Cutting width:	96 cm
Engine:	CC OHV, 1 Cylinder, 547 cm ³
Pated power (kW / min ⁻¹):	12 5 / 2 250

Cutting width:	96 cm
Engine:	CC OHV, 1 Cylinder, 547 cm ³
Rated power (kW / min ⁻¹):	12,5 / 2.250
Speed:	Autodrive™
Model no.: 13H890AF603	Price:







RevTEK Technology

RevTEK - Reverse Mowing Technology: To mow in reverse, when no kids or animals are around. This cares for more safety.



Pivoting one-piece hood The entire motor hood can be removed within seconds without the need for tools, for easy maintenance.



12-position height adjustment with memory indicator. More freedom to find the ideal cutting height perfectly suited to your demands.



Anti-scalping deck wheels to prevent damages to the turf especially on tight turns.




Luxury high back seat The pillowy seat with its high back lets you sit in highest comfort even on a long run.



Front bumper Prevents your investment from damages and thanks to the Fast Attach[™] system you can replace the bumper with i.e. a dozer blade within minutes with no tools required.

cubcadet.eu

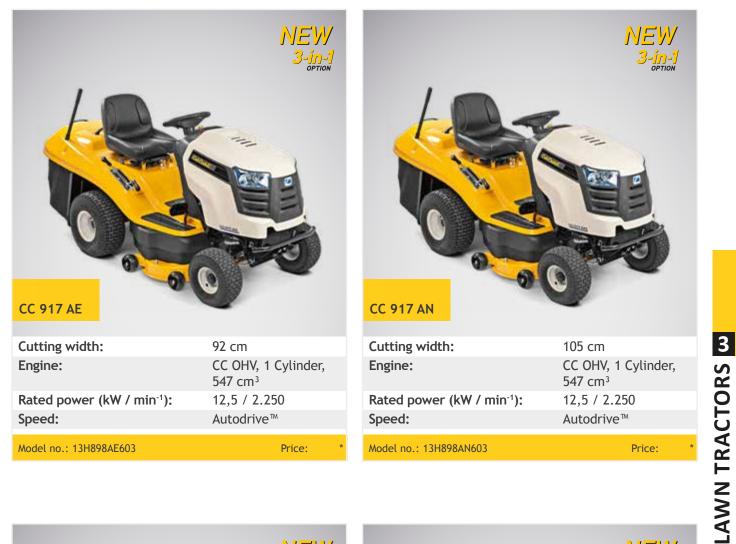



Price:

Model no.: 13H899AE603



Cutting width:	105 cm
Engine:	CC OHV, 1 Cylinder, 547 cm ³
Rated power (kW / min ⁻¹):	12,5 / 2.250
Speed:	Hydrostatic
Model no.: 13H899AN603	Price: *

* Recommended retail price of the manufacturer

Cadel

	CC 917 AF	CC 919 HG
Engine type	Cub Cadet OHV	B&S Intek
Engine displacement	547 cm ³	500 cm ³
Rated power (kW / min-1)	12,5 / 2.250	9,4 / 2.800
Cylinders	Single	Single
Tank volume (capacity) (l)	13	13
Lubrication	Fully pressurized automotive-style oil pump w/ spin-on oil filter	Fully pressurized automotive-style oil pump w/ spin-on oil filter
Transmission	AutoDrive™	Hydrostatic
Speeds	Infinitely variable	Infinitely variable
Control	Foot pedal control	Dual direction foot pedal control
Cruise control	Standard	Standard
Mowing area in m²/h	> 1.500	> 2.000
Cutting width (cm)	96	107
Cutting height (min-max)	30 - 90 mm	30 - 90 mm
Cutting options	3 in 1 Option	3 in 1 Option
Number of blades	2	2
Deck engagement	Manual lever control	Manual lever control
Deck height positions	12	12
Deck wheels	2 anti scalp	4 anti scalp
Wash nozzle / mulching plug	- / Standard	Standard / standard
	Optional 200 / 196-180A699	Optional 200 / OEM-190-180A
Bag lever / hardtop	- /-	- /-
Bag (capacity in l) / accessory no Bag lever / hardtop Bag full indicator / grass deflector	- / - - / Standard	- / - - / Standard
Front axle	Cast-iron	Cast-iron
Front axie Front bumper		Standard
•	Standard 40	40
Turning radius (cm)	40 15" x 6" / 20" x 8"	40 15" x 6" / 20" x 8"
Wheel size (front/rear)		
Wheel bearings	Sleeve bearings	Sleeve bearings
Easy entry frame	Standard	Standard
Battery	12 V heavy-duty 275 cold crank amp	12 V heavy-duty 275 cold crank amp
Headlights System monitor package	Standard	Standard
System monitor package	Standard	Standard
Safety systems	Neutral start, operator presence, brake pedal lock	Neutral start, operator presence, brake pedal lock
Seat type	High back	High back
Seat adjustment	Quick adjuster lever	Quick adjuster lever
Steering wheel	Comfort	Comfort
Tool box / 12 V plug	- / -	Standard / standard
Mow in reverse (RevTEK™)	Standard	Standard
Battery charger	196-967-678	196-967-678
LpA / LwA / LwAg (dB)	88 / 98 / 100	88 / 98 / 100
Vibration value body / (K-factor)	1 / 0,5 m/s ²	1 / 0,5 m/s ²
Vib. value hand-arm / (K-factor)	5 / 1,5 m/s²	5 / 1,5 m/s²
Dimensions (L / W / H) (cm)	172 / 107 / 100	172 / 115 /116
Weight net (kg)	215	225
Model number	13H890AF603	13HJ93AG603
EAN	4 008423 866254	4 008423 866377
Price*	4 000423 000234"	4 000423 0003//~

LAWN TRACTORS

CC 917 AE	CC 917 HE	CC 917 AN	CC 917 HN
Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV
547 cm ³	547 cm ³	547 cm ³	547 cm ³
12,5 / 2.250	12,5 / 2.250	12,5 / 2.250	12,5 / 2.250
Single	Single	Single	Single
10	10	10	10
Fully pressurized automotive- style oil pump w/ spin-on oil filter	Fully pressurized automotive- style oil pump w/ spin-on oil filter	Fully pressurized automotive- style oil pump w/ spin-on oil filter	Fully pressurized automotive style oil pump w/ spin-on oi filter
AutoDrive™	Hydrostatic	AutoDrive™	Hydrostatic
Infinitely variable	Infinitely variable	Infinitely variable	Infinitely variable
Foot pedal control	Dual direction foot pedal control	Foot pedal control	Dual direction foot pedal control
Standard	Standard	Standard	Standard
> 1.500	> 2.000	> 1.500	> 2.000
96	105	96	105
20 - 92 mm	20 - 92 mm	20 - 105 mm	20 - 120 mm
3 in 1 Option	3 in 1 Option	3 in 1 Option	3 in 1 Option
2	2	2	2
Manual lever control	Manual lever control	Manual lever control	Manual lever control
12	12	12	12
4 anti scalp	4 anti scalp	4 anti scalp	4 anti scalp
Standard / 196-751A678	Standard / 196-751A678	Standard / 196-751A678	Standard / 196-751A678
 280	280	240	350
Standard / standard	Standard / standard	Standard / standard	Standard / standard
Standard / optional	Standard / optional	Standard / optional	Standard / optional
Cast-iron	Cast-iron	Cast-iron	Cast-iron
Standard	Standard	Standard	Standard
40	40	40	40
15" x 6" / 20" x 8"	15" x 6" / 20" x 8"	15" x 6" / 20" x 8"	15" x 6" / 20" x 8"
Sleeve bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Standard	Standard	Standard	Standard
12 V heavy-duty 275 cold crank amp	12 V heavy-duty 275 cold crank amp	12 V heavy-duty 275 cold crank amp	12 V heavy-duty 275 cold crank amp
Standard	Standard	Standard	Standard
Standard	Standard	Standard	Standard
Neutral start, operator presence, brake pedal lock	Neutral start, operator presence, brake pedal lock	Neutral start, operator presence, brake pedal lock	Neutral start, operator presence, brake pedal lock
High back	High back	High back	High back
Quick adjuster lever	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
Comfort	Comfort	Comfort	Comfort
- / -	- / -	- / -	- / -
Standard	Standard	Standard	Standard
196-967-678	196-967-678	196-967-678	196-967-678
88 / 98 / 100	88 / 98 / 100	88 / 98 / 100	88 / 98 / 100
1 / 0,5 m/s ²	1 / 0,5 m/s ²	1 / 0,5 m/s ²	1 / 0,5 m/s ²
5 / 1,5 m/s ²	5 / 1,5 m/s ²	5 / 1,5 m/s ²	5 / 1,5 m/s ²
242 / 99 / 112	242 / 99 / 112	/ 99 / 112	250 / 111 / 112
219	227	230	240
13H898AE603	13H899AE603	13H898AN603	13H899AN603
4 008423 866261	4 008423 866285	4 008423 866278	4 008423 865684



1000-SERIES SD

EFFICIENCY MADE COMFORTABLE

Nothing makes cutting grass as comfortable as the Cub Cadet 1000 Series lawn tractors. Many comfortable features - like a storage place for your mobile phone, your garden gloves or a tool set, a cup holder for beverages, the cruise control or the fact that the operating functions can be activated with minimum effort - make the work much easier. The professional grade engines provide the power you need day in and day out. Sit down on the pillowy high back seat and grab the soft grip steering wheel and you already feel the difference. No more hard garden work, this is fun to ride.




Bag Disengaging

We improved the performance of our bag disengagement. The guidance of the bar is much smoother and very easy to attempt. You can use the disengagement now with less effort and more effience.



Narrow turning radius Cub Cadet 1000 Series lawn tractors have an ultra-tight turning radius of only 40 cm for remarkable manoeuvrability.

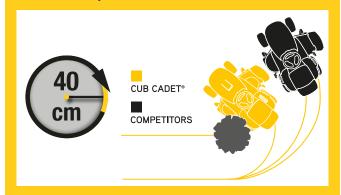



RevTEK Technology

RevTEK - Reverse Mowing Technology: To mow in reverse, when no kids or animals are around. This cares for more safety.



Pivoting one-piece hood The entire motor hood can be removed within seconds without the need for tools, for easy maintenance.



Seat adjustment

Comfortable 10-position seat adjustment lever on the left side for easy access. With 16,5 cm of seat travel these tractors are industry leading in driver's comfort.



Fully welded steel frame The especially thick frame allows for more stiffness and reduced vibrations.



12-position height adjustment with memory indicator. More freedom to find the ideal cutting height perfectly suited to your demands.



Deck wash nozzle

The deck wash nozzle allows to easily attach a hose lock type fitting directly to the deck to flush water in. The fitting is angled to ensure an even distribution of water to fully clean the deck. (on selected models) ï

2





Cleaner cut

The advanced cutting system features a wide discharge chute and a deep deck for optimal grass lift and mulching capability.



Cruise control / Parking brake With this lever you can set a cruise speed when driving and set the parking brake when the tractor is not in motion.



Deck engagement

The deck engagement lever next to the cutting height adjustment lever care for ergonomical handling. Selected models even come with electro-magnetic clutch.



Anti-scalping deck wheels to prevent damage to the turf especially on tight turns.



Fuel tank and fuel window

The extra large 10 l fuel tank can easily be filled from the side; there is no need to open the hood. The angled fuel neck prevents fuel spilling. Thanks to the fuel window at the dashboard, you can comfortably control the fuel level from the driver's seat.



Front bumper

Prevents your investment from damages and thanks to the Fast Attach^M system you can replace the bumper with i.e. a dozer blade within minutes with no tools required.

Kohler 7000 series engine



CC 1224 KHP and CC 1022 KHI are equipped with powerful Kohler OHV twin-cylinder engines with 725 cm³. Move torque and premium specs. They provide more torque and professional grade features.

E-PTO deck



The electro-magnetic fingertip deck engagement provides highest user comfort.



Cutting width:	107 cm
Engine:	B&S Intek, V-Twin, 656 cm ³
Rated power (kW / min ⁻¹):	10,5 / 2.500
Speed:	Hydrostatic
Model no.: 13HT93AG603	Price:



Speed: Hydrostatic Model no.: 13HP93AT603







V-Twin, 725 cm³ 14,1 / 2.400 Hydrostatic Price:

CC 1224 KHP

Cutting width:

Model no.: 14HQ94AP603

Engine:

Speed:






PERFORMANCE MEETS EFFICIENCY

When there are large areas to be mowed and long mowing times are needed, more convenience is desirable. Cub Cadet 1000 Series lawn tractors with rear discharge deliver unparalleled comfort and a premium cut every time. An easy handling of the bag despite a large grass bag volume, an acoustic signal which sounds as soon as the bag is full and has to be emptied, low vibration, quiet engines, large pneumatic tires, a high back luxury seat and soft grip steering wheel - these are only a few of many benefits which make mowing much more comfortable and stressless.





Narrow turning radius Cub Cadet 1000 Series lawn tractors have an ultra-tight turning radius of only 40 cm for remarkable manoeuvrability.






RevTEK Technology

RevTEK - Reverse Mowing Technology: To mow in reverse, when no kids or animals are around. This cares for more safety.



Pivoting one-piece hood The entire motor hood can be removed within seconds without the need for tools, for easy maintenance.

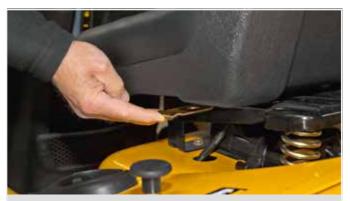

Seat adjustment

Comfortable 10-position seat adjustment lever on the left side for easy access. With 16,5 cm of seat travel these tractors are industry leading in driver's comfort.



Fully welded steel frame The especially thick frame allows for

The especially thick frame allows for more stiffness and reduced vibrations.



12-position height adjustment with memory indicator. More freedom to find the ideal cutting height perfectly suited to your demands.



Deck wash nozzle

The deck wash nozzle allows to easily attach a hose lock type fitting directly to the deck to flush water in. The fitting is angled to ensure an even distribution of water to fully clean the deck. (on selected models)






Luxury high back seat The pillowy seat with its high back lets you sit in highest comfort even on a long run.



Cruise control / Parking brake With this lever you can set a cruise speed when driving and set the parking brake when the tractor is not in motion.

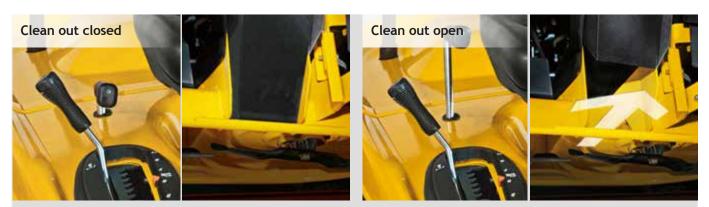

Clean out system

Pulling a lever on the right side of the seat, the chute opens in the area of the deck and the clogged grass can fall out. The grass on the rear plate and on the bag full indicator is pushed into the grass bag. This clean out system can be operated while the blades are running. It is also perfect in combination with the deck wash nozzle as the grass will not end up in the bag. The overflow will be closed. The result is a better collection of light debris and autumn leafs.



Easy removal of the grass bag You only have to pull the knob on top of the fender, and then the bag sinks softly to the ground.



Anti-scalping deck wheels to prevent damages to the turf especially on tight turns.



CC 1018 BHE

Cutting width:

Rated power (kW / min⁻¹):

Model no.: 13HT91AE603

Model no.: 13HQ91AN603

Engine:

Speed:



The acoustic bag full indicator sounds when the bag is full and needs to be emptied. This indicator can be adjusted according to changing grass conditions.



Tool box with integrated 12V power outlet.



СС 1024 КНМ	KORLER	Electric bag opener
Cutting width:	105 cm	
Engine:	Kohler 7000 Series, V-Twin, 725 cm ³	
Rated power (kW / min ⁻¹):	14,5 / 2.400	
Speed:	Hydrostatic	

Price:

92 cm

656 cm³

10,5 / 2.500

Hydrostatic

B&S Intek, V-Twin,

Price:

KOLUER

CC 1020 BHN

Cutting width:	105 cm
Engine:	B&S Intek, V-Twin, 656 cm ³
Rated power (kW / min ⁻¹):	13,2 / 2.400
Speed:	Hydrostatic
Model no.: 13HT91AN603	Price:

Kohler 700 series engine



grade features.

Lift the grass catcher with the push of a button at the highest level of comfort.

CC 1024 KHN are equipped

with powerful Kohler OHV

twin-cylinder engines with

725 cm³. Move torque and

premium specs. They provide

more torgue and professional

* Recommended retail price of the manufacturer

_		CC 1018 BHG	CC 1022 KHT	СС 1224 КНР
	Engine type	B&S Intek	Kohler 7000 Series	Kohler 7000 Series
	Engine displacement	656 cm ³	725 cm ³	725 cm ³
	Rated power (kW / min-1)	10,5 / 2.500	14,1 / 2.400	16,9 / 3.000
	Cylinders	V-Twin	V-Twin	V-Twin
	Tank volume (capacity) (l)	13	13	10
	Lubrication	Fully pressurized automotive-style oil pump w/ spin-on oil filter	Fully pressurized automotive-style oil pump w/ spin-on oil filter	Fully pressurized automotive-style oil pump w/ spin-on oil filter
	Transmission	Hydrostatic	Hydrostatic	Hydrostatic
	Speeds	Infinitely variable	Infinitely variable	Infinitely variable
	Control	Dual direction foot pedal control	Dual direction foot pedal control	Dual direction foot pedal control
ī	Cruise control	Standard	Standard	Standard
	Mowing area in m ² /h	> 2.000	> 3.000	> 5.000
	Cutting width (cm)	107	117	127
	Cutting height (min-max)	30 - 90 mm	30 - 90 mm	30 - 90 mm
	Cutting options	3 in 1 Option	3 in 1 Option	3 in 1 Option
	Number of blades	2	2	3
	Deck engagement	Electro-magnetic	Electro-magnetic	Electro-magnetic
	Deck height positions	12	12	12
	Deck wheels	4 anti scalp	4 anti scalp	4 anti scalp
	Wash nozzle / mulching plug	Standard / standard	Standard / standard	Standard / standard
	Bag (capacity in l) / accessory no	Optional 200 / OEM-190-180A	Optional 200 / 19A40003OEM	Optional 300 / 19A40002OEM
	Bag lever / hardtop	- / -	- / -	- / -
-	Bag full indicator / grass deflector	- / Standard	- / Standard	- / Standard
	Front axle	Cast-iron	Cast-iron	Cast-iron
	Front bumper	Deluxe	Deluxe	Deluxe
	Turning radius (cm)	40	40	40
	Wheel size (front/rear)	15" x 6" / 20" x 8"	15" x 6" / 20" x 8"	16" x 6,5"-8" / 23" x 10,5"- 12"
	Wheel bearings	Ball bearings	Ball bearings	Ball bearings
ī	Easy entry frame	Standard	Standard	Standard
	Battery	12 V heavy-duty 275 cold crank amp	12 V heavy-duty 275 cold crank amp	12 V heavy-duty 275 cold crank amp
	Headlights	Standard Digital hour meter, oil	Standard Digital hour meter, oil	Standard Digital hour meter, oil
MILLEN	System monitor package	service minder, engine oil service indicator, battery voltage	service minder, engine oil service indicator, battery voltage	service minder, engine oil service indicator, battery voltage
	Safety systems	Neutral start, operator presence, brake pedal lock, RevTEK™	Neutral start, operator presence, brake pedal lock, RevTEK™	Neutral start, operator presence, brake pedal lock, RevTEK™
	Seat type	High back	High back	High back with armrests
	Seat adjustment	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
	Steering wheel	Comfort	Comfort	Comfort
	Tool box / 12 V plug	Standard / standard	Standard / standard	Standard / standard
	Mow in reverse (RevTEK™)	Standard	Standard	Standard
	Battery charger	Deluxe	196-967-678	196-967-678
	LpA / LwA / LwAg (dB)	88 / 98 / 100	88 / 98 / 100	93 / 103 / 105
	Vibration value body / (K-factor)	1 / 0,5 m/s²	1 / 0,5 m/s ²	1 / 0,5 m/s ²
	Vib. value hand-arm / (K-factor)	5 / 1,5 m/s ²	5 / 1,5 m/s ²	5 / 1,5 m/s ²
	Dimensions (L / W / H) (cm)	172 / 115 / 116	172 / 124 / 116	194 / 150 / 114
	Weight net (kg)	225	225	235
_	Model number	13HT93AG603	13HP93AT603	14HQ94AP603
	EAN	4 008423 862058	4 008423 862027	4 008423 862089

Price*

LAWN TRACTORS

	CC 1022 KHI	CC 1018 BHE	CC 1020 BHN	CC 1024 KHN
	Kohler 7000 Series	B&S Intek	B&S Intek	Kohler 7000 Series
	725 cm ³	656 cm ³	656 cm ³	725 cm ³
	14,1 / 2.400	10,5 / 2.500	13,2 / 2.400	14,5 / 2.400
	V-Twin	V-Twin	V-Twin	V-Twin
	10	10	10	10
	Fully pressurized automotive- style oil pump w/ spin-on oil filter	Fully pressurized automotive- style oil pump w/ spin-on oil filter	Fully pressurized automotive- style oil pump w/ spin-on oil filter	Fully pressurized automotive- style oil pump w/ spin-on oil filter
	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
	Infinitely variable	Infinitely variable	Infinitely variable	Infinitely variable
	Dual direction foot pedal control	Dual direction foot pedal control	Dual direction foot pedal control	Dual direction foot pedal control
	Standard	Standard	Standard	Standard
	> 1.500	> 1.500	> 2.000	> 2.000
	92	92	105	105
	65 - 105 mm	20 - 120 mm	20 - 120 mm	20 - 120 mm
	-	3 in 1 Option	3 in 1 Option	3 in 1 Option
	2	2	2	2
	Manual lever control	Manual lever control	Manual lever control	Manual lever control
	8	12	12	12
	2	4 anti scalp	4 anti scalp	4 anti scalp
	- / -	Standard / 196-751-678	Standard / 196-751-678	Standard / 196-751-678
	-	280	350	350
	- / -	Telescopic handle / Steel	Telescopic handle / Steel	Electric / Steel
	- / -	Standard / 196-972-678	Standard / 196-972-678	Standard / 196-713E678
	Cast-iron	Cast-iron	Cast-iron	Cast-iron
	Deluxe	Deluxe	Deluxe	Deluxe
	40	40	40	40
	15" x 6" / 18" x 9,5", Agricultural tires	15" x 6" / 20" x 8"	15" x 6" / 20" x 8"	15" x 6" / 20" x 8"
	Ball bearings	Ball bearings	Ball bearings	Ball bearings
	Standard	Standard	Standard	Standard
	12 V heavy-duty 275 cold crank amp			
	Standard	Standard	Standard	Standard
	Digital hour meter, oil service minder, engine oil service indicator, battery voltage	Digital hour meter, oil service minder, engine oil service indicator, battery voltage	Digital hour meter, oil service minder, engine oil service indicator, battery voltage	Digital hour meter, oil service minder, engine oil service indicator, battery voltage
	Neutral start, operator presence, brake pedal lock, RevTEK™			
	High back	High back	High back	High back
	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
	Comfort	Comfort	Comfort	Comfort
	Standard / standard	Standard / standard	Standard / standard	Standard / standard
	Standard	Standard	Standard	Standard
	Deluxe	Deluxe	Deluxe	Deluxe
	88 / 98 / 100	88 / 98 / 100	88 / 98 / 100	88 / 98 / 100
	1 / 0,5 m/s ²	1 / 0,5 m/s ²	1 / 0,5 m/s²	1 / 0,5 m/s ²
	5 / 1,5 m/s ²			
	185 / 98 / 110	242 / 99 / 112	250 / 111 / 112	250 / 111 / 112
	240	227	240	242
	13HP91AI603	13HT91AE603	13HT91AN603	13HQ91AN603
1	4 008423 862010	4 008423 862065		

* Recommended retail price of the manufacturer



2000-SERIES SD


POWERFUL AND DURABLE


The Cub Cadet 2000 Series works hard for those who demand more out of their equipment. You get more power from the professional grade Kohler Command engine. More control and comfort available from electric power steering, an adjustable steering wheel and a great seat. You even get more life out of your tractor with a fully welded steel frame, cast-iron transmission, cast-iron front axle and the legendary Cub Cadet direct shaft drive.





Powerful KOHLER Command engine Strong and durable Kohler Command engine for best support in tough conditions.

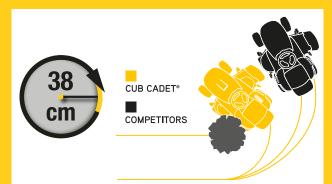





You have the choice of 3 different side discharge cutting deck sizes, 122 cm, 127 cm or 137 cm. The 122 cm deck is made of 2.8 mm thick fabricated steel and thus made for tougher jobs.

- 19A40015603 19A40013603 19A40014603
- 122 cm fabricated deck 127 cm stamped deck 137 cm stamped deck



Direct shaft drive gives the 2000 Series garden tractor the most efficient power transfer with no belts to slip or break. The dual pedal foot-controlled hydrostatic transmission and cast-iron transaxle gives you maximum power to handle attachments and is the ultimate in durability and performance



With electronic power steering and a very tight turning radius of 38 cm only, you will be rewarded with nearly effortless operation and smooth control. Ask your dealer for more details.

+ X
PLUS X AWARD [®]
achieved for:
Innovation
High Quality
Functionality
Ergonomics

"Garden tractor of the year 2012"

GTX 2100

Cutting width:	Optional
Engine:	Kohler Command, V-Twin, 674 cm ³
Rated power (kW / min ⁻¹):	15,9 / 3.000
Speed:	Hydrostatic

Model no.: 14A-3GE-603







With the pillowy driver's seat with extra high back and armrests there's no more back-aching garden work. On this seat it's fun to ride.

Electro-mechanical deck lift

Lift the heavy duty cutting deck with just a push on the button. The 6-step deck positioner reliably stops the down travel of the deck at your preferred cutting height.



	GTX 2100
Engine type	Kohler Command
Engine displacement	674 cm ³
Rated power (kW / min-1)	15,9 / 3.000
Cylinders	V-Twin, horizontal shaft
Tank volume (capacity) (l)	17
Lubrication	Fully pressurized automotive-style oil pump w/ spin-on oil filter
Transmission	Hydrostatic, heavy-duty cast-iron
Speeds	Infinitely variable
Control	Dual direction foot pedal control
Cruise control	Standard
Mowing area in m²/h	> 5.000
Cutting width (cm)	122 / 127 / 137 cm
Cutting height (min-max)	38 - 116 mm
Cutting options	2 in 1
Number of blades	122 cm = 2;127/137 cm = 3
Deck engagement	Electro-magnetic
Deck height positions	6 positions, electric lift
Deck wheels	2 wheels and front roller
Wash nozzle	Standard
Mulching plug	Optional, 122 cm 19A70016100 / 127 and 137 cm OEM-190-193
Bag (capacity) (l)	-
Bag lever / hardtop	- / -
Bag full indicator	-
Grass deflector	Optional
Front axle	Heavy-duty cast-iron with dual grease fittings
Front bumper	Heavy-duty steel
Turning radius (cm)	38
Wheel size (front/rear)	16" x 6,5"-8" / 23" x 10,5"-12"
Wheel bearings	Ball bearings
Easy entry frame	Standard
Battery	12 V heavy-duty 275 cold crank amp
Headlights	Standard
System monitor package	Digital hour meter, oil service minder, engine oil service indicator, battery voltage
Safety systems	Neutral start, operator presence, brake pedal lock, RevTEK $^{\rm M}$ reverse mowing technology
Seat type	High back with armrests
Seat adjustment	Quick adjuster lever
Steering wheel	Comfort / Electric power steering
Tool box / 12 V plug	- / -
Mow in reverse (RevTEK TM)	Standard
Battery charger	196-967-678
LpA / LwA / LwAg (dB)	93 / 103 / 105
Vibration value body / (K-factor)	1 / 0,5 m/s ²
Vib. value hand-arm / (K-factor)	5 / 1,5 m/s²
Dimensions (L / W / H) (cm)	191 / depend on mowing deck/ 120
Weight net (kg)	320
Model number	14A-3GE-603
EAN	



ACCESSORIES

CC 1018 AN

[66] LAWN TRACTORS

CUB CADET HAULER BIG VERSATILITY. SMALL FOOTPRINT.



CONVENIENT - FOLDS TO STORE EASILY. COLLAPSIBLE SIDES FOR EASY STORAGE.

Collapse all four sides and store vertically, taking up 70 % less space in a garage or shed than traditional yard carts.

TAKES UP 70 % LESS SPACE



VERSATILE - LETS YOU DO MORE. **EASY FLAT-BED HAULING**

Increase versatility by operating in foldflat mode, convenient for hauling long loads like logs or lumber.



FOLD-OUT PANELS

Allows convenient access for loading, unloading and dumping.



SERIOUS LOAD CAPACITY Rated for loads up to 800 lbs., with

the sides set upright, easily haul soil or mulch, brick or stone, shrubs or plants, or even garbage bins.

Hauler: Mod. no.: 19A40026100 Price:



HANDLE AND TOOL HOLDER FOR CUB CADET HAULER

- Soft grip handle
- Creates portable work station
- Easy and quick assembly Handle:

Mod. no.: 19A400270EM Price:

Tool holder: Mod. No.: 19A400300EM Price:







LAWN TRACTORS [67]

-AWN TRACTORS



ACCESSORIES		
	 Lawn tractor cover L / XL Size L: for small and medium sized lawn tractors Size XL: for large sized and rear discharge lawn tractors 	4 ⁰⁰⁸⁴²³ 806441 Mod. no.: 2024-U1-0003 Price: *
	Cub Cadet Tow behind sweeper • Working width: 112 cm Catcher capacity: 736 liter	4 ¹⁰⁰⁸⁴²³¹⁸²³⁸⁸²¹ Mod. no.: 2024-U1-0004 Price: * 4 ⁰⁰⁸⁴²³¹⁸⁵⁸⁹⁷⁶ Mod. no.: 196-543-000 Price: *
	Cub Cadet Tow behind broadcast spreader • Spreading width: 370 cm Container capacity: 87 kg	4 008423 858969 Mod. no.: 196-542-000 Price: *
	Cub Cadet Trailer • Capacity: 544 kg Volume: 425 liter	4 008423 858952 Mod. no.: 196-541-000 Price: *
	 Spreader Tow broadcast spreader, volume 80 kg, poly (measurements: approx. L 109,2 / W 96,52 / H 104,1 cm, weight: 26 kg) Tow broadcast spreader, volume 39 kg, poly (measurements: approx. L 88,9 / W 55,9 / H 60,9 cm, weight: approx. 8 kg) 	4 008423 816310 Mod. no.: 196-036-000 Price: * 4 008423 813432 Mod. no.: 196-031-000 Price: *
	 Tow broadcast spreader, volume 45 kg, poly (measurements: approx. L 67,3 / W 67,3 / H 36,8 cm, weight: approx. 15 kg) Utility cart with poly bed Poly convertible push/tow cart , capacity max. 159 kg (measurements: approx. L 142,2 / W 83,8 / H 76,2 cm) 	4 016918 011423 Mod. no.: 190-525-000 Price: * 4 008423 804331 Mod. no.: 190-236A000 Price: *
	Utility carts with steel bed	

- Tow steel dump cart, capacity max. 227 kg (measurements: approx. L 152,4 / W 83,8 / H 72 cm, weight: approx. 27 kg)
- Tow steel dump cart, capacity max. 340 kg, steel (measurements: approx. L 177,8 / W 83,8 / H 73,7 cm, weight: approx. 70 kg)

4 016918 006894 Mod. no.: 190-223B000 Price: * 4 008423 804348 Mod. no.: 196-507-000 Price: *



Lawn sweeper

Lawn rollers

H 45,6 cm

Sprayers

• Tow lawn sweeper, width 96 cm, 340 l, steel (measurements: approx. L 182,9 / W 114,3 / H 58,4 cm, weight: approx. 30 kg)

 Push / tow poly lawn roller, max. weight 114 kg when filled with water, 61 cm (measurements: approx. L 127 / W 76,2 /

• Tow poly lawn roller, max. weight 182 kg when filled with

water, 91 cm (measurements: approx. L 127 / W 106,7 /



Mod. no.: 190-145A000 Price: *

3

-AWN TRACTORS

4 008423 401264

Mod. no.: 190-228-000 Price: *

4⁰⁰⁸⁴²³804478 Mod. no.: 190-229-000



4 008423 804423

Mod. no.: 190-155-000 Price: *

4⁰⁰⁸⁴²³804430 Mod. no.: 190-537-000

4 008423 804454

Mod. no.:190-526-000

4 008423 815498

Mod. no.: 190-224A000 Price: *

0 043033 560202

Mod. no.: 19A70025100 Price: *

Price:

Price:



Aerators / De-thatcher

H 45,7 cm, weight 18 kg)

 Tow sprayer, 5,3 l/min, capacity 57 l, poly (measurement: L 139,7 / W 61 / H 45,7 cm)

• Tow sprayer, large, 6,8 l/min, capacity 95 l, poly

• Tow tine de-thatcher 101,6 cm, 20 teeth (heat treated tines), steel (measurements: approx. L 104 / W 101,6 / H 104 cm)

(measurements: approx. L 139,7 / W 66 cm / H 50,8 cm)

 Tow lawn aerator (spiker type) 101,6 cm, 12 spike wheels (spiker), steel (measurem.: approx. L 104 / W 101,6 / H 104 cm, weight: approx. 14 kg)



- Hitch
- Hitch for all RZT models



• 122 cm fabricated deck for model GTX 2100



- 127 cm stamped deck for model GTX 2100
- 137 cm stamped deck for model GTX 2100



High grass cutting deck

• 92 cm fabricated high grass cutting deck. Fits all 1000 series rear discharge models. No collecting possible.

4 008423 853247

Mod. no.: 19A40015603 Price: *



Mod. no.: 19A40013603 Price: *

4 008423 853261 Mod. no.: 19A40014603

Price: *



Mod. no.: 196-806A678 Price: *

Cub Cadet

Grass bags

- Twin bagger without blades, 200 litres, for 107 cm side discharge models
- Tripple bagger, 300 litres, with blades, for model CC 1224 KHP
- Twin bagger, 200 litres, without blades, for model CC 1022 KHT
- Twin bagger incl. blades, 200 litres, for 96 cm side discharge models
- Twin bagger, 115 litres, without blades, for MINI-RIDER CC 114 TD
- Twin bagger, 200 litres, without blades, for Z-Force SZ-48
- Twin bagger, 200 litres, with blades, for RZT 50
- Tripple bagger, 300 litres, without blades, for RZT 54



15

Deflectors

- Rear deflector for models CC 917 AE, CC 917 HE, CC 917 AN, CC 917 HN, CC 1018 BHE and CC 1020 BHN
- Rear deflector for models CC 714 TE, CC 714 HE and CC 718 HN

Mulch kits

- Mulch kit (without blades) for models 900 series, CC 1018 BHE, CC 1020 BHN and CC 1024 KHN
- Mulch kit (without blades) for model CC 714 TF
- $\,$ Mulch kit (without blades) for models CC 714 TE , CC 714 HE and CC 718 HN
- Mulch kit for 122 cm fabricated deck for model GTX 2100 and for Z-Force SZ-48
- Mulch kit for 127 cm and 137 cm stamped deck for model GTX 2100

4 008423 815849

Mod. no.: OEM-190-180A Price:



Mod. no.: 19A40002OEM Price: *

0 037049 946099

Mod. no.: 19A30003OEM Price: *

4 008423 804744

Mod. no.: 196-180A699 Price: *

0 043033 563029

Mod. no.: 19A300140EM Price: *

0 043033 565054

Mod. no.: 19A70040100 Price: *

4 008423 825466

Mod. no.: 19B70004100 Price: *

0⁰037049⁹⁵1802⁰ Mod. no.: 19A70034100

Price:

4 008423 849530

Mod. no.: 196-972A678 Price: *

4 008423 836097

Mod. no.: 196-750A678 Price: *

4 008423 851748

Mod. no.: 196-751A678 Price: *

4 008423 819632

Mod. no.: OEM-190A116 Price: *

4 008423 836080

Mod. no.: 196-749A678 Price: *

4 008423 848205

Mod. no.: 19A70016100 Price: *

4 008423 819069 Mod. no.: OEM-190-193 Price: *



Front bumper

• Front bumper kit - FastAttach™ fits all 700, 900 & 1000 series lawn tractors

4 008423 809046

Mod. no.: OEM-196B603 Price:

4 008423 816891

Mod. no.: 196-721A678 Price:

4 008423 856545

Mod. no.: 196-226C678 Price:

4 008423 828511 Mod. no.: 196-227A678 Price:

4 008423 813678

Mod. no.: 196-898-699

4 008423 824797

Mod. no.: 196-658-699

4 008423 804126 Mod. no.: 196-964-678

4 008423 807684

Mod. no.: OEM-190-833 Price:

4 008423 854008

Mod. no.: 19B40022100 Price:

4 008423 815368 Mod. no.: 196-718-678

4 008423 807691

Mod. no.: OEM-190-032

Price:

Price:

Price:

Price:

Price:



Agricultural tires

• Chevron style rear wheels 18" x 9,5". Set exists of 2 cpl. wheels. Fits all tractors with either 18" or 20" rear wheels.

Front sweeper and collector

- Front sweeper FastAttach[™] for models 900 series, CC 1018 BHE, CC 1020 BHN und CC 1024 KHN
- Front collector for front sweeper model 196-226C678



Tire chains

- Tire chains 18" x 9,5" with adapter for models CC 714 TE, CC 714 HE and CC 718 HG
- Tire chains 20" x 8,0" with spacers for models CC 714 TF, CC 714 HF, CC 718 HG, CC 1018 BHG, CC 1018 BHE, CC 1020 BHN, CC 1024 KHN and 900 series
- Tire chains 23" x 9,5" for model GTX 2100 and CC 1224 KHP



Dozer blade & rubber lip

- 117 cm dozer blade for all models, except model GTX 2100
- 117 cm dozer blade with remote control lever for model GTX 2100
- Rubber lip universal for all dozer blades



Snow thrower accessory

• 107 cm 2-stage snow thrower, front attachment for models CC 1018 BHG, CC 1224 KHP, CC 1018 BHE, CC 1020 BHN and CC 1024 KHN



Battery charger

• Electric battery charger with 12V plug, 1000 mA for all tractor models, with trigger charge function (for battery Winter maintenance)



Mod. no.: 196-967-678 Price:

AWN TRACTORS

3

Z-TURNS

Cub Cadet, the proven innovator of zero-turn technology, has created the industry's strongest line of zero-turn riders. Our leading 360° turning technology lets you easily mow around obstacles with incredible confidence, making every mowing-maneuver more efficient. And with models that feature four-wheel steering with steering wheel control you enjoy increased stability and ease, letting you cut down your cutting time.









PRECISE PERFORMANCE WITH LAP BAR TECHNOLOGY

Built strong with heavy-duty components and high-performance commercial-grade engines, the RZT Series delivers dependability and the professional results you and your custommers demand.



Turning to the left: To turn to the left, move the left drive control lever rearward of the right lever.



Driving forward:

Slowly and evenly move both drive control levers forward. The mower will start to move forward. To slow down the tractor move the control levers rearward to attain the desired speed or move the levers to the neutral position to stop the mower.



Executing a zero-turn: To execute a zero-turn, move one control lever forward while simultaneously moving the other control lever rearward.



Driving reverse: To drive the mower in reverse, slowly and evenly move both drive control levers rearwards.




Turning to the right: To turn to the right, move the right drive control lever rearward of the left lever. The greater the distance between the two levers, the sharper the mower will turn.



Deep frame for easy entry on your Cub Cadet RZT.

Soft grip



Soft grip features the lap bars on your rider and make the work more confident and comfortable.



Durability

With a reinforced steel frame and chassis and a heavy-duty fabricated front axle, the RZT Series is above all else, strong.



More than enough legroom during the operation and in couple with the high-back seat a matchless mowing performance.



Cutting width:	107 cm
Engine:	CC OHV, 1 Cylinder, 547 cm ³
Rated power (kW / min ⁻¹):	12,5 / 2.300
Drive:	Dual Hydrostatic
Model no.: 17BMCACS603	Price:



Cutting width:	127 cm	
Engine:	KAWASAKI OHV, V-Twin, 726 cm ³	
Rated power (kW / min ⁻¹):	12,0 / 2.400	
Drive:	Dual Hydrostatic	
Model no.: 17AICACQ603	Price:	







STRENGTH, EASE AND VERSATILITY.

Feature for feature, the RZT-S gives you more. Zero-Turn handling combined with the ease of steering-wheel control and four-wheel steering makes for unmatched stability and unprecedented versatility. An award-winning combination, there's no doubt in its strength of performance. And with its incredible durability, there'll be no doubt for years to come.



Dual Hydrostatic transmission The dual Hydrostatic transmission provides you with the highest manoeuvrability.



Synchro Steer® Technology

Patented SynchroSteer technology, pioneered by Cub Cadet, is a system of dual hydrostatic

transmissions synchronized with steering-wheel control of all four wheels to create true zero-turn maneuverability. Not to mention, tremendous ease-ofuse and stability.




Floating cutting dec

The floating deck follows the contours of the ground for superior cutting, providing a smoother and more uniform look

SYNCRO-STEER TECHNOLOGY®

Unbeatable manoeuvrability and unmatched climbing ability

The Cub Cadet Syncro-Steer® Technology is the next evolution of Zero-Turn technique. Our unique Zero-Turn riders with a traditional steering wheel provide you with the amazing manoeuvrability of a conventional Zero-Turn but with full control of the front wheels. Steering and drive are perfectly syncronized to ensure the exact speed and rotating direction of each rear wheel at every position of the front wheels. This revolutionary technology is available on RZT-S, Z-FORCE and TANK series.

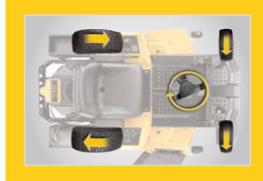








The electro-magnetic fingertip deck engagement provides highest user comfort.



Optional Tow Hitch for easy attach of the original Cub Cadet accessory program.

Dual Hydrostatic

Price:





RZT-S 42

Cutting width:	107 cm
Engine:	KAWASAKI OHV, V-Twin, 603 cm ³
Rated power (kW / min ⁻¹):	10,0 / 2.400
Drive:	Dual Hydrostatic
Model no.: 17BICBDS603	Price:



Drive: Model no.: 17AICACW603

		RZT 42	RZT 50
	Engine type	Cub Cadet OHV	Kawasaki OHV
	Engine displacement	547 cm ³	726 cm ³
	Rated power (kW / min ⁻¹)	12,5 / 2.300	12,0 / 2.400
	Cylinders	Single	V-Twin
	Tank volume (capacity) (l)	11,4	11,4
÷	Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
	Transmission	Dual Hydrostatic	Dual Hydrostatic
	Speeds	Infinitely variable	Infinitely variable
	Control	Lap bars	Lap bars
-	Cruise control	Standard	Standard
	Mowing area in m²/h	> 2.000	> 3.500
	Cutting width (cm)	107	127
	Cutting height (min-max)	38 - 100 mm	38 - 100 mm
	Cutting options	3 in 1 Option	3 in 1 Option
	Number of blades	2	3
	Deck engagement	Electro-magnetic	Electro-magnetic
	Deck height positions	8	8
	Deck wheels	2	4
_	Wash nozzle / mulching plug	Standard / standard	Standard / standard
	Bag (capacity in l) / accessory no	Optional 200 / 19B70020OEM	Optional 200 / 19B70004100
;	Grass deflector	Standard	Standard
_	Front axle	Steel	Steel
	Front bumper / rear bumper	-	-
	Turning radius (cm)	Zero	Zero
	Wheel size (front/rear)	11" x 4" / 18" x 8,5"	13" x 5" / 18" x 9,5"
	Wheel bearings	Ball bearings	Ball bearings
	Easy entry frame	Standard	Standard
	Battery	12 V / 230 cold crank amp	12 V / 230 cold crank amp
٤	Headlights	-	-
SYSIEM	Hour meter & service minder	Standard	Standard
	Safety systems	Operator presence	Operator presence
	Seat type	High back	High back with armrests
	Seat adjustment	Quick adjuster lever	Quick adjuster lever
	Steering wheel	2-way adjustable lap bars with comfort grips	2-way adjustable lap bars with comfort grips
	Utility bin	Standard	Standard
	Mow in reverse (RevTEK™)	-	-
-	Battery charger	196-967-678	196-967-678
	LpA / LwA / LwAg (dB)	88 / 98 / 100	93 / 103 / 105
;	Vibration value body / (K-factor)	1 / 0,5 m/s ²	1 / 0,5 m/s ²
ŧ.	Vib. value hand-arm / (K-factor)	5 / 1,5 m/s ²	5 / 1,5 m/s²
	Dimensions (L / W / H) (cm)	203 / 116 / 92	203 / 150 / 92
-	Weight net (kg)	228	253
	Model number	17BMCACS603	17AICACQ603
-	EAN	4 ¹ 008423 ¹ 866308 ¹	4 ⁰ 008423 ⁸⁵⁷⁶⁹⁶
7	Price*		

Dual HydrostaticDual HydrostaticDual HydrostaticInfinitely variableInfinitely variableInfinitely variableLap barsDual foot pedal controlDual foot pedal controlStandardStandardStandard* 5.000* 2.000* 3.000137107117* 8 - 100 mm38 - 100 mm38 - 100 mm3 in 1 Option3 in 1 Option3 in 1 Option3 in 1 Option3 in 22Electro-magneticElectro-magneticElectro-magneticStandard8 424424Standard / standardStandard / standardOptional 300 / 19A70008100Optional 200 / 19B700200EMOptional 200 / 19B700200EMOptional 300 / 19A70008100Optional 200 / 19B700200EMStandardStandardStandardStandardStandardStandardStandardStandardStandardStandardStandardStandardStandardStandardStandardStandardStandard0ptional 300 / 19A7008100Optional 200 / 19B700200EMOptional 200 / 19B700200EM0ptional 300 / 19A7008100StandardStandardStandardStandardStandard13* x5* / 18* x 9,5*13* x5* / 18* x 8,5*Ball bearingsSleeve bearingsStandardStandard12 V / 230 cold crank amp12 V / 230 cold crank am	RZT 54	RZT-S 42	RZT-S 46
12,5 / 3,100 10,0 / 2,400 12,0 / 2,400 VTwin VTwin VTwin 11,4 10,5 10,5 Full-pressure with spin-on oil filter Full-pressure with spin-on oil filter Full-pressure with spin-on oil filter Dual Hydrostatic Dual Hydrostatic Dual Hydrostatic Dual Hydrostatic Infinitely variable Infinitely variable Infinitely variable Infinitely variable Lap bars Dual foot pedal control Dual foot pedal control Dual foot pedal control 3 standard Standard Standard Standard 3 st 100 mm 38 - 100 mm 38 - 100 mm 38 - 100 mm 3 in 1 Option 3 with 2 C 2 2 2 Electro-magnetic Electro-magnetic Electro-magnetic Standard Standard Standard Standard Standard Optional 30 / 19A70008100 Optional 20 / 198700200EM Optional 200 / 19870020EM Standard Standard Standard Standard	Kawasaki OHV	Kawasaki OHV	Kawasaki OHV
V-Twin V-Twin V-Twin 11,4 10,5 10,5 Full-pressure with spin-on oil filter Full-pressure with spin-on oil filter Full-pressure with spin-on oil filter Dual Hydrostatic Dual Hydrostatic Dual Hydrostatic Dual Hydrostatic Lap bars Dual foot pedal control Dual foot pedal control Dual foot pedal control Standard Standard Standard Standard 3 107 117 38 - 100 mm 38 - 100 mm 38 - 100 mm 3 2 2 Electro-magnetic Electro-magnetic Electro-magnetic 8 8 8 4 2 4 2 4 2 Standard / standard Standard / standard Standard 0ptional 300 / 19A70008100 Optional 200 / 19B700200EM Optional 200 / 19B700200EM Standard Standard Standard Standard 13 * 5 / 18 * 9,5" 13 * 5 / 18 * 8,5" 13 * 5 / 18 * 8,5" Ball bearings Sleeve bearings Sleeve bearings	726 cm ³	603 cm ³	726 cm ³
11,410,510,5Full-pressure with spin-on oil filterFull-pressure with spin-on oil filterFull-pressure with spin-on oil filterDual HydrostaticDual HydrostaticDual HydrostaticDual HydrostaticInfinitely variableInfinitely variableInfinitely variableInfinitely variableLap barsDual foot pedal controlDual foot pedal controlDual foot pedal controlStandardStandardStandardStandard> 5,000> 2,0003.3,00011713710711738 - 100 mm38 - 100 mm38 - 100 mm3 in 1 Option3 in 1 Option222Electro-magneticElectro-magneticElectro-magnetic8888424Standard / standardStandard / standardStandardOptional 300 / 19A70008100Optional 200 / 19B700200EMOptional 200 / 19B700200EMStandardStandardStandardStandard5StandardStandardStandard5StandardStandardStandard13" x 5" / 18" x 9,5"13" x 5" / 18" x 8,5"13" x 5" / 18" x 8,5"Ball bearingsSileeve bearingsSileeve bearingsStandardStandardStandard12 V / 230 cold crank amp12 V /	12,5 / 3.100	10,0 / 2.400	12,0 / 2.400
Full-pressure with spin-on oil filterFull-pressure with spin-on oil filterFull-pressure with spin-on oil filterDual HydrostaticDual HydrostaticDual HydrostaticLap barsDual foot pedal controlDual foot pedal controlStandardStandardStandard* 5,000> 2,000> 3,00013710711738 - 100 mm38 - 100 mm38 - 100 mm3 in 1 Option3 at 222Electro-magneticElectro-magnetic888424Standard / standardStandard / standardOptional 300 / 19A70008100Optional 200 / 19B700200EMOptional 300 / 19A7008100Optional 200 / 19B700200EMSteelSteel5Steel5Steel2Zero2Zero13" x 5" / 18" x 8,5"13" x 5" / 18" x 8,5"Ball bearingsSteelSteel5Standard12 V / 230 cold crank amp12 V / 230 cold c	V-Twin	V-Twin	V-Twin
Dual HydrostaticDual HydrostaticDual HydrostaticInfinitely variableInfinitely variableInfinitely variableLap barsDual foot pedal controlDual foot pedal controlStandardStandardStandard> 5.000> 2.000> 3.00013710711738 - 100 mm38 - 100 mm38 - 100 mm3 in 1 Option3 in 1 Option322Electro-magneticElectro-magnetic888424Standard / standardStandard / standardOptional 300 / 19A70008100Optional 200 / 19B700200EMOptional 200 / 19B700200EMStandardStandar	11,4	10,5	10,5
Infinitely variableInfinitely variableInfinitely variableLap barsDual foot pedal controlDual foot pedal controlStandardStandardStandard> 5.000> 2.000> 3.00013710711738 - 100 mm38 - 100 mm38 - 100 mm3 in 1 Option3 in 1 Option3 in 1 Option322Electro-magneticElectro-magneticElectro-magnetic888424StandardStandard / standardOptional 300 / 19A70008100Optional 200 / 19B700200EMOptional 300 / 19A70008100Optional 200 / 19B700200EMStandardStaelSteelSteel222Zero13" x 5" / 18" x 9,5"13" x 5" / 18" x 8,5"Ball bearingsSleeve bearingsSteeve bearingsSleeve bearingsStandardStandard12 V / 230 cold crank amp12 V / 230 cold crank ampStandardStandard12 V / 230 cold crank amp12 V / 230 cold crank ampStandardStandardOperator presenceOperator presence, brake switch, deck clutch switchHigh backHigh backHigh backHigh backOperator presenceQuick adjuster lever2.way adjustel leap barsStandardStandardStandardStandardStandardOperator presenceOperator presence, brake	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
Lap barsDual foot pedal controlDual foot pedal controlStandardStandardStandard \times 5.000 \sim 2.000 \sim 3.00013710711738 - 100 mm38 - 100 mm38 - 100 mm3 in 1 Option3 in 1 Option3 in 1 Option322Electro-magneticElectro-magneticElectro-magnetic888424Standard / standardStandard / standardOptional 300 / 19A70008100Optional 200 / 19B700200EMStandardStandardStandardSteel513" x 5" / 18" x 9,5"13" x 5" / 18" x 9,5"13" x 5" / 18" x 8,5"Ball bearingsSleeve bearingsStandardStandard12 V / 230 cold crank amp12 V / 230 cold crank amp2-way adjustable lap bars with comfort gripsGoperator presence, brake switch, deck clutch switchHigh back with armrestsHigh backHigh back with armrestsHigh back196-967-678196-967-67893 / 103 / 10588 / 98 / 1001 / 0,5 m/s2 <td>Dual Hydrostatic</td> <td>Dual Hydrostatic</td> <td>Dual Hydrostatic</td>	Dual Hydrostatic	Dual Hydrostatic	Dual Hydrostatic
Standard Standard Standard Standard > 5.000 > 2.000 > 3.000 137 107 117 38 - 100 mm 38 - 100 mm 38 - 100 mm 3 in 1 Option 3 in 1 Option 3 in 1 Option 3 2 2 Electro-magnetic Electro-magnetic Electro-magnetic 8 8 8 4 2 4 Standard / standard Standard / standard Standard / standard Optional 300 / 19A70008100 Optional 200 / 19B700200EM Optional 200 / 19B700200EM Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard 13" x 5" / 18" x 8,5" 13" x 5" / 18" x 8,5" Standard Standard Standard Standard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp	Infinitely variable	Infinitely variable	Infinitely variable
> 5.000 > 2.000 > 3.000 137 107 117 38 - 100 mm 38 - 100 mm 38 - 100 mm 3 in 1 Option 3 in 1 Option 3 in 1 Option 3 in 1 Option 3 in 1 Option 3 in 1 Option 3 2 2 Electro-magnetic Electro-magnetic Electro-magnetic 8 8 8 4 2 4 Standard / standard Standard / standard Optional 300 / 19A70008100 Optional 200 / 19B700200EM Optional 200 / 19B700200EM Standard Standard Standard Standard Steel Steel Steel Steel - - / - - / - - / - Zero Zero Zero Zero Standard Standard Standard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp - - - - - Standard Operator presence, brake switch, deck clutch switch	Lap bars	Dual foot pedal control	Dual foot pedal control
137 107 117 38 - 100 mm 38 - 100 mm 38 - 100 mm 3 in 1 Option 3 in 1 Option 3 in 1 Option 3 2 2 Electro-magnetic Electro-magnetic Electro-magnetic 8 8 8 4 2 4 Standard / standard Standard / standard Standard / standard Optional 300 / 19A70008100 Optional 200 / 19B700200EM Optional 200 / 19B700200EM Standard Standard Standard 13" x 5" / 18" x 9,5" 13" x 5" / 18" x 8,5" 13" x 5" / 18" x 8,5" Ball bearings Standard Standard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12	Standard	Standard	Standard
38 - 100 mm 38 - 100 mm 38 - 100 mm 3 in 1 Option 3 in 1 Option 3 in 1 Option 3 2 2 Electro-magnetic Electro-magnetic Electro-magnetic 8 8 8 4 2 4 Standard / standard Standard / standard Standard / standard Optional 300 / 19A70008100 Optional 200 / 19B700200EM Optional 200 / 19B700200EM Standard Standard Standard Standard Standard Standard Standard Standard Standard 195700200EM Optional 200 / 19B700200EM Standard Standard Standard Standard Standard Standard Standard Standard Standard 13" x 5" / 18" x 9,5" 13" x 5" / 18" x 8,5" 13" x 5" / 18" x 8,5" Ball bearings Standard Standard Standard Standard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp </td <td>> 5.000</td> <td>> 2.000</td> <td>> 3.000</td>	> 5.000	> 2.000	> 3.000
3 in 1 Option 3 in 1 Option 3 in 1 Option 3 2 2 Electro-magnetic Electro-magnetic Electro-magnetic 8 8 8 4 2 4 Standard / standard Standard / standard Standard / standard Optional 300 / 19A70008100 Optional 200 / 19B700200EM Optional 200 / 19B700200EM Standard Standard Standard Standard Steel Steel - -/- -/- Zero Zero Zero Standard Standard Standard 12 V / 230 cold crank amp 12 V / 240 cold crank amp - - - Standard Standard Standard Operator presence Operator presence, brake switch,	137	107	
3 in 1 Option 3 in 1 Option 3 in 1 Option 3 2 2 Electro-magnetic Electro-magnetic Electro-magnetic 8 8 8 4 2 4 Standard / standard Standard / standard Standard / standard Optional 300 / 19A70008100 Optional 200 / 19B700200EM Optional 200 / 19B700200EM Standard Standard Standard Standard Standard Steel - / - - / - - / - Zero Zero Zero I 3" x 5" / 18" x 9,5" 13" x 5" / 18" x 8,5" 13" x 5" / 18" x 8,5" Ball bearings Sleeve bearings Sleeve bearings Standard Standard Standard 12 V / 230 cold crank amp 12 V / 24 cold crank amp Operator presence Operator presence, brake switch, deck cl	38 - 100 mm	38 - 100 mm	38 - 100 mm
3 2 2 Electro-magnetic Electro-magnetic Electro-magnetic 8 8 8 4 2 4 Standard / standard Standard / standard Standard / standard Optional 300 / 19A70008100 Optional 200 / 19B700200EM Optional 200 / 19B700200EM Standard Standard Standard Standard Standard Standard Steel Steel Steel - · / · · / · Zero Zero Zero Standard Standard Standard Standard Standard Steel 13" x 5" / 18" x 9,5" 13" x 5" / 18" x 8,5" 13" x 5" / 18" x 8,5" Ball bearings Sleeve bearings Sleeve bearings Standard Standard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp Quick adjuster lever Quick adjuster lever Quick adjuster lever Quick adjuster lever Qu		3 in 1 Option	3 in 1 Option
Electro-magnetic Electro-magnetic Electro-magnetic 8 8 8 4 2 4 Standard / standard Standard / standard Standard / standard Optional 300 / 19A70008100 Optional 200 / 19B700200EM Optional 200 / 19B700200EM Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Steel Steel Steel - - / - - / - Zero Zero Zero Standard Steeve bearings Steeve bearings Ball bearings Standard Standard Standard Standard Standard Operator presence Operator presence, brake switch, deck clutch switch Operator presence, brake switch, deck clutch switch Guick adjuster lever Quick adjuster lever Quick adjuster lever 2-way adjustable lap bars with comfort grips Standard Standard Standard Standard Stan			
8 8 8 4 2 4 Standard / standard Standard / standard Standard / standard Optional 300 / 19A70008100 Optional 200 / 19B700200EM Optional 200 / 19B700200EM Standard Standard Standard Steel Steel Steel - - / - - / - Zero Zero Zero 13" x 5" / 18" x 9,5" 13" x 5" / 18" x 8,5" 13" x 5" / 18" x 8,5" Ball bearings Sleeve bearings Sleeve bearings Standard Standard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp - - - - - Standard Standard Standard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp - - - - - Standard Standard Standard Standard Operator presence Operator presence, brake switch, deck clutch switch High back <td>Electro-magnetic</td> <td></td> <td></td>	Electro-magnetic		
Standard / standard Standard / standard Standard / standard Optional 300 / 19A70008100 Optional 200 / 19B700200EM Optional 200 / 19B700200EM Standard Standard Standard Standard Standard Standard Standard Standard Standard Steel Steel Steel - - / - - / - Zero Zero Zero 13" x 5" / 18" x 9,5" 113" x 5" / 18" x 8,5" 113" x 5" / 18" x 8,5" Ball bearings Steeve bearings Steeve bearings Standard Standard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp Standard Standard Standard Operator presence Operator presence, brake switch, deck clutch switch witch switch Operator presence, brake switch, deck clutch switch Quick adjuster lever Quick adjuster lever Quick adjuster lever Quick adjuster lever 2-way adjustable lap bars with comfort grips Standard <td>-</td> <td></td> <td></td>	-		
Optional 300 / 19A70008100 Optional 200 / 19B700200EM Optional 200 / 19B700200EM Standard Standard Standard Standard Steel Steel Steel Steel - - / - - / - - / - Zero Zero Zero Zero 13" x 5" / 18" x 9,5" 13" x 5" / 18" x 8,5" 13" x 5" / 18" x 8,5" Standard Ball bearings Steeve bearings Steeve bearings Steeve bearings Standard Standard Standard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp - - - - Standard Standard Standard Operator presence, brake switch, deck clutch switch Operator presence Operator presence, brake switch, deck clutch switch Operator presence, brake switch, deck clutch switch High back with armrests High back High back Quick adjuster lever Quick adjuster lever Quick adjuster lever 2.way adjustable lap bars with comfort grips Standard Standard Standard<	4	2	4
Standard Standard Standard Steel Steel Steel - - / - - / - Zero Zero Zero 13" x 5" / 18" x 9,5" 13" x 5" / 18" x 8,5" 13" x 5" / 18" x 8,5" Ball bearings Sleeve bearings Sleeve bearings Standard Standard Standard 12 V / 20 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 20 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp - - - - Standard Standard Standard Standard Operator presence Operator presence, brake switch, deck clutch switch Operator presence, brake switch, deck clutch switch Operator presence, brake switch, deck clutch switch High back High back High back High back Quick adjuster lever Quick adjuster lever Quick adjuster lever 2-way adjustable lap bars with comfort grips Comfort Comfort 196-967-678 196-967-678 196-967-678 93 / 103 / 105 88 / 98 / 100	Standard / standard	Standard / standard	Standard / standard
Steel Steel Steel Zero . . . Zero Zero Zero 13" x 5" / 18" x 9,5" 113" x 5" / 18" x 8,5" 113" x 5" / 18" x 8,5" Ball bearings Sleeve bearings Sleeve bearings Standard Standard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp Standard Standard Standard Operator presence Operator presence, brake switch, deck clutch switch Operator presence, brake switch, deck clutch switch Quick adjuster lever Quick adjuster lever Quick adjuster lever 2-way adjustable lap bars with comfort grips Comfort Comfort 2-way adjustable lap bars with comfort grips 	Optional 300 / 19A70008100	Optional 200 / 19B700200EM	Optional 200 / 19B700200EM
 - / - Zero Standard Standard Standard Zero Seve bearings Seve bearings Seve bearings Seve bearings Seve bearings Seve bearings Standard Stan	Standard	Standard	Standard
Zero Zero 13" x 5" / 18" x 9,5" 13" x 5" / 18" x 8,5" 13" x 5" / 18" x 8,5" 13" x 5" / 18" x 9,5" 13" x 5" / 18" x 8,5" 13" x 5" / 18" x 8,5" Ball bearings Sleeve bearings Sleeve bearings Standard Standard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 13" x 5" / 18" x 8,5" 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 14 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 5 Standard 0perator presence, brake switch, deck clutch switch 0perator presence, brake switch, deck clutch switch 0 perator presence Quick adjuster lever Quick adjuster lever 2 way adjustable lap bars with comfort grips Comfort Comfort 196-967-678 196-967-678 196-967-678 93 / 103 / 105 88 / 98 / 100 88 / 98 / 100 1 / 0,5 m/s2 5 / 1,5 m/s2 5 / 1,5 m/s2<	Steel	Steel	Steel
13" x 5" / 18" x 9,5" 113" x 5" / 18" x 8,5" 113" x 5" / 18" x 8,5" Ball bearings Sleeve bearings Sleeve bearings Standard Standard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp Standard M Standard Operator presence Operator presence Doperator presence, brake switch, deck clutch switch Operator presence, brake switch, deck clutch switch Quick adjuster lever Quick adjuster lever Quick adjuster lever 2-way adjustable lap bars with comfort Comfort Comfort Standard Standard Standard Standard Standard Standard Migh back vith armests Comfort Comfort Quick adjuster lever Comfort Comfort Standard Standard Standard Standar	-	- / -	- / -
Ball bearings Sleeve bearings Sleeve bearings Standard GStandard Standard 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp 12 V / 230 cold crank amp Standard Image: Cold crank amp 12 V / 230 cold crank amp Standard Image: Cold crank amp Image: Cold crank amp Standard Standard Standard Operator presence Operator presence, brake switch, deck clutch switch Operator presence, brake switch, deck clutch switch Migh back with armrests GB Standard GB Standard Operator presence, brake switch, deck clutch switch Quick adjuster lever Quick adjuster lever Quick adjuster lever Quick adjuster lever 2-way adjustable lap bars with comfort Comfort Comfort Comfort Standard Image: Standard Standard Standard - - - - 196-967-678 196-967-678 196-967-678 Image: Standard Standard Standard 1 / 0,5 m/s² I	Zero	Zero	Zero
StandardStandardStandard12 V / 230 cold crank amp12 V / 230 cold crank ampStandardStandardStandardOperator presenceOperator presence, brake switch, deck clutch switchOperator presence, brake switch, deck clutch switchHigh back with armrestsHigh backHigh backQuick adjuster leverQuick adjuster leverQuick adjuster lever2-way adjustable lap bars with comfort gripsComfortComfortStandardStandardStandardStandardStandardStandard196-967-678196-967-678196-967-67893 / 103 / 10588 / 98 / 10088 / 98 / 1001 / 0,5 m/s²1 / 0,5 m/s²1 / 0,5 m/s²203 / 192203 / 116 / 118203 / 126 / 118	13" x 5" / 18" x 9,5"	13" x 5" / 18" x 8,5"	13" x 5" / 18" x 8,5"
StandardStandardStandard12 V / 230 cold crank amp12 V / 230 cold crank ampStandardStandardStandardOperator presenceOperator presence, brake switch, deck clutch switchOperator presence, brake switch, deck clutch switchHigh back with armrestsHigh backHigh backQuick adjuster leverQuick adjuster leverQuick adjuster lever2-way adjustable lap bars with comfort gripsComfortComfortStandardStandardStandardStandardStandardStandard196-967-678196-967-678196-967-67893 / 103 / 10588 / 98 / 10088 / 98 / 1001 / 0,5 m/s²1 / 0,5 m/s²1 / 0,5 m/s²203 / 192203 / 116 / 118203 / 126 / 118			
Image: constraint of the standardImage: constraint of the standardStandardStandardStandardOperator presenceOperator presence, brake switch, deck clutch switchOperator presence, brake switch, deck clutch switchMigh back with armrestsMigh backHigh backQuick adjuster leverQuick adjuster leverQuick adjuster lever2-way adjustable lap bars with comfort gripsComfortComfortStandardStandardComfortStandardStandardStandard196-967-678196-967-678196-967-67893 / 103 / 10588 / 98 / 10088 / 98 / 1001 / 0,5 m/s²1 / 0,5 m/s²1 / 0,5 m/s²203 / 192203 / 116 / 118203 / 126 / 118	Standard	Standard	Standard
Image: constraint of the standardImage: constraint of the standardStandardStandardStandardOperator presenceOperator presence, brake switch, deck clutch switchOperator presence, brake switch, deck clutch switchMigh back with armrestsImage: constraint of the switchOperator presence, brake switch, deck clutch switchQuick adjuster leverQuick adjuster leverImage: constraint of the switch2-way adjustable lap bars with comfort gripsComfortComfortStandardComfortComfortStandardImage: constraint of the switchImage: constraint of the switch196-967-678Image: constraint of the switch88 / 98 / 10093 / 103 / 105Image: constraint of the switch88 / 98 / 1001 / 0,5 m/s²Image: constraint of the switchImage: constraint of the switch203 / 192203 / 116 / 118203 / 126 / 118	12 V / 230 cold crank amp	12 V / 230 cold crank amp	12 V / 230 cold crank amp
Operator presenceOperator presence, brake switch, deck clutch switchOperator presence, brake switch, deck clutch switchHigh back with armrestsHigh backQuick adjuster leverQuick adjuster leverQuick adjuster lever2-way adjustable lap bars with comfort gripsComfortComfortStandardComfortComfortStandardStandard196-967-678196-967-67893 / 103 / 10588 / 98 / 10088 / 98 / 1001 / 0,5 m/s²1 / 0,5 m/s²1 / 0,5 m/s²203 / 192203 / 116 / 118203 / 126 / 118	-	-	-
Operator presenceOperator presence, brake switch, deck clutch switchOperator presence, brake switch, deck clutch switchHigh back with armrestsFHigh backHigh backQuick adjuster leverQuick adjuster leverQuick adjuster lever2-way adjustable lap bars with comfort gripsComfortComfortStandardComfortComfortStandardStandardStandard196-967-678196-967-678196-967-67893 / 103 / 10588 / 98 / 10088 / 98 / 1001 / 0,5 m/s²1 / 0,5 m/s²1 / 0,5 m/s²203 / 192203 / 116 / 118203 / 126 / 118	Standard	Standard	Standard
High back with armrestsHigh backHigh backQuick adjuster leverQuick adjuster leverQuick adjuster lever2-way adjustable lap bars with comfort gripsComfortComfortStandardStandardStandardStandardStandardStandard196-967-678196-967-678196-967-67893 / 103 / 10588 / 98 / 10088 / 98 / 1001 / 0,5 m/s²1 / 0,5 m/s²1 / 0,5 m/s²203 / 1/92203 / 116 / 118203 / 126 / 118	Operator presence	Operator presence, brake switch,	Operator presence, brake switch,
2-way adjustable lap bars with comfort grips Comfort Comfort Standard Standard Standard Standard 106-967-678 196-967-678 93 / 103 / 105 88 / 98 / 100 88 / 98 / 100 1 / 0,5 m/s² 1 / 0,5 m/s² 1 / 0,5 m/s² 203 / 192 203 / 116 / 118 203 / 126 / 118	High back with armrests	High back	High back
grips Comfort Comfort Standard Standard Standard - - - 196-967-678 196-967-678 196-967-678 93 / 103 / 105 88 / 98 / 100 88 / 98 / 100 1 / 0,5 m/s² 1 / 0,5 m/s² 1 / 0,5 m/s² 5 / 1,5 m/s² 5 / 1,5 m/s² 5 / 1,5 m/s² 203 / 92 203 / 116 / 118 203 / 126 / 118	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
Image: Problem State Image: Pr		Comfort	Comfort
93 / 103 / 105 88 / 98 / 100 1 / 0,5 m/s² 1 / 0,5 m/s² 5 / 1,5 m/s² 5 / 1,5 m/s² 203 / / 92 203 / 116 / 118	Standard	Standard	Standard
93 / 103 / 105 88 / 98 / 100 1 / 0,5 m/s² 1 / 0,5 m/s² 5 / 1,5 m/s² 5 / 1,5 m/s² 203 / / 92 203 / 116 / 118	-	-	-
1 / 0,5 m/s² 1 / 0,5 m/s² 1 / 0,5 m/s² 5 / 1,5 m/s² 5 / 1,5 m/s² 5 / 1,5 m/s² 203 / / 92 203 / 116 / 118 203 / 126 / 118	196-967-678	196-967-678	196-967-678
5 / 1,5 m/s² 5 / 1,5 m/s² 5 / 1,5 m/s² 203 / / 92 203 / 116 / 118 203 / 126 / 118	93 / 103 / 105	88 / 98 / 100	88 / 98 / 100
203 / / 92 203 / 116 / 118 203 / 126 / 118	1 / 0,5 m/s ²	1 / 0,5 m/s ²	1 / 0,5 m/s ²
	5 / 1,5 m/s²	5 / 1,5 m/s²	5 / 1,5 m/s ²
265 234 256	203 / / 92	203 / 116 / 118	203 / 126 / 118
200 201 200	265	234	256
17AICACW603 17BICBDS603 17BICBDT603	17AICACW603	17BICBDS603	17BICBDT603
4 008423 857689 4 008423 859379 4 008423 857726			





ZERO TURNS. INFINITE STRENGTH.

High-performance meets practicality for one strong rider. The industry's first zero-turn system with steering wheel control and four-wheel steering for unmatched strength and stability is just one of this series' many proven strengths. From the power of a professional-grade engine to its unbeatable efficiency and durability, every mow is as strong as the last.



Dual Hydrostatic transmission The dual Hydrostatic transmission provides you with the highest manoeuvrability.



Synchro Steer® Technology

Patented SynchroSteer technology, pioneered by Cub Cadet, is a system of dual hydrostatic


transmissions synchronized with steering-wheel control of all four wheels to create true zero-turn maneuverability. Not to mention, tremendous ease-ofuse and stability.



Fabricated cutting deck

Every centimeter of the Z-Force SZ's heavy-gauge, welded steel cutting deck has been engineered to

make sure you get unsurpassed airflow, blade overlap, and quality of cut. Every time.

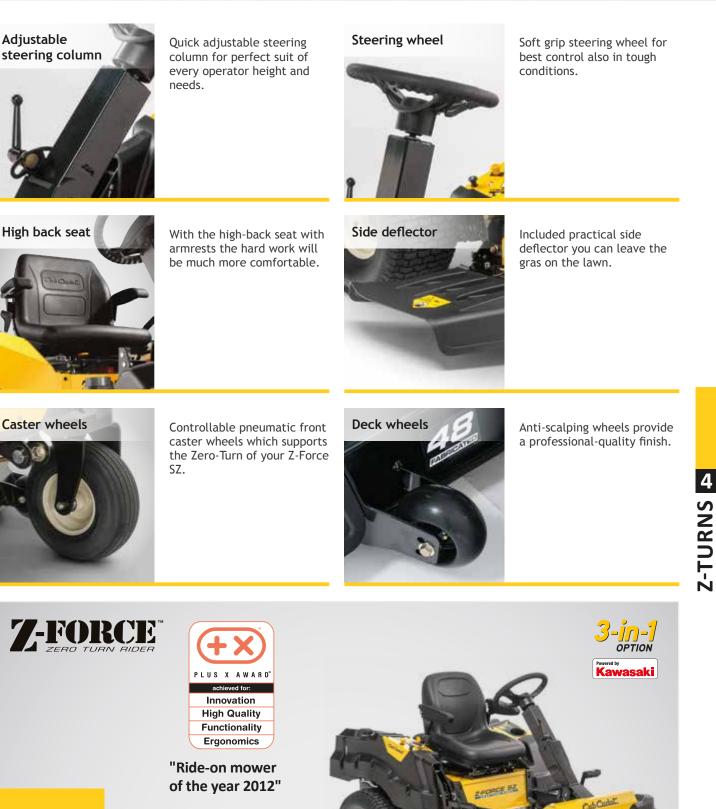

Z-FORCE SZ-48

Cutting width:	122 cm
Engine:	KAWASAKI OHV, V-Twin, 726 cm ³
Rated power (kW / min ⁻¹):	12,3 / 2.750
Drive:	Dual Hydrostatic

Model no.: 17AIDGHB603

Price:





ZERO TURNS. INFINITE STRENGTH.

High-performance meets practicality for one strong rider. The industry's first zero-turn system with steering wheel control and four-wheel steering for unmatched strength and stability is just one of this series' many proven strengths. From the power of a professional-grade engine to its unbeatable efficiency and durability, every mow is as strong as the last.





Dual Hydrostatic transmission The dual Hydrostatic transmission provides you with the highest manoeuvrability.

Incredible maneuverability



With unrivaled stability and precision control, there's no terrain the TANK SZ can't handle. Four-wheel steering gives more control and confidence on hills than ever before. By delivering a quality cut at angles other riders can't handle, it's easy to see what makes the TANK SZ the smartest choice in commercial zero-turns.



More power for unmatched results with Kawasaki® FX Series commercial-grade engines deliver higher horsepower and maximum torque for enhanced performance. Heavy-duty, remote canister air filtration system and premium cooling system provide a durable, long-life design.



Provides twice the protection against unforgiving environmental conditions while ensuring even the most complex parts are thoroughly and evenly coated inside and out with an electronically-applied dual layer of eCoat and powder. Now that's a smart investment.

Professional-Grade Comfort



A high-back elasticity vibration control (EVC) comfort seat with arm rests is the perfect place to spend hours of productive mowing. With the quick adjustable steering column the soft grip steering wheel can be perfectly adjusted to your preferred position and with the power steering it's a breeze to maneouver the TANK SZ even through the sharpest corners.



Model no.: 53AI2PUD603

Engine:

Drive:

Price:

Z-TURNS




Adjustable steering column



Quick adjustable steering column for perfect suit of every operator height and needs.

Steering wheel



Soft grip steering wheel make sure that you always have the best control of your rider.






With the professional-grade high-back seat with arm rests of your TANK SZ you feel the ultimate comfort and superior performance.




The fabricated cutting deck of the TANK SZ is made for the tough garden work. Durable and robust for the perfect cut.



Controllable pneumatic front caster wheels which makes your TANK SZ versatile at is best.



Anti-scalping wheels provide a professional-quality finish.

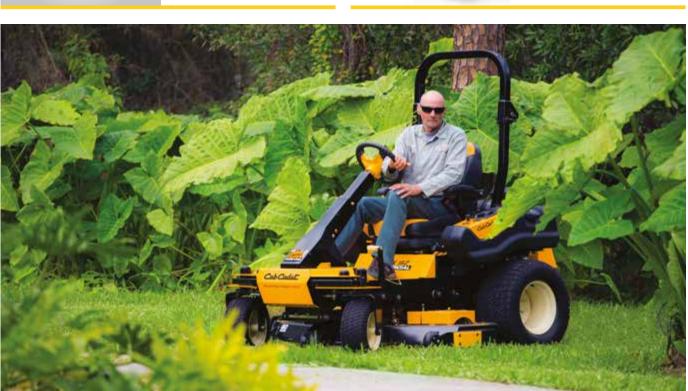

	Z-FORCE SZ 48	TANK SZ-60
Engine type	Kawasaki OHV	Kawasaki OHV
Engine displacement	726 cm ³	852 cm ³
Rated power (kW / min ⁻¹) Cylinders	12,3 / 2.750	16,7 / 2.600
Cylinders	V-Twin	V-Twin
Tank volume (capacity) (l)	17,0	68
Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
Transmission	Dual Hydrostatic	Hydraulic
Speeds Control	Infinitely variable	Infinitely variable
Control	Dual foot pedal control	Dual foot pedal control
Cruise control	-	-
Mowing area in m²/h	> 4.000	> 6.000
Cutting width (cm)	122	152
Cutting height (min-max)	25 - 102 mm	26 - 127 mm
Cutting options	3 in 1 Option	2 in 1
Number of blades	3	3
Cutting options Number of blades Deck engagement	Electro-magnetic	Electro-magnetic
Deck height positions	15	17
Deck wheels	2	2 + roller
Wash nozzle / mulching plug	Standard / optional	Standard / optional
Bag (capacity in l) / accessory no Grass deflector	Optional 200 / 19A70011100	-
Grass deflector	Standard	Standard
Front axle	Cast-iron	Cast-iron
Front bumper / rear bumper	Standard / -	- / Standard
Turning radius (cm)	Zero	Zero
Wheel size (front/rear)	13" x 5" / 20" x 10"	16" x 6,5" / 24" x 12"
Wheel bearings	Ball bearings	Sleeve bearings
Easy entry frame	Standard	Standard
Battery	12 V / 230 cold crank amp	12 V / 230 cold crank amp
s Headlights	-	-
Headlights Hour meter & service minder	Standard	Standard
Safety systems	Operator presence, brake switch, deck clutch switch	Operator presence, brake switch, deck clutch switch
Seat type	High back with armrests and gel suspension	High back with armrests and gel suspension
Seat adjustment Steering wheel Utility bin	Quick adjuster lever	Quick adjuster lever
Steering wheel	Comfort	Comfort
·····	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard
Battery charger	196-967-678	196-967-678
LpA / LwA / LwAg (dB)	93 / 103 / 105	93 / 103 / 150
Vibration value body / (K-factor)	1 / 0,5 m/s ²	1 / 0,5 m/s ²
Vib. value hand-arm / (K-factor)	5 / 1,5 m/s ²	5 / 1,5 m/s ²
Vibration value body / (K-factor) Vib. value hand-arm / (K-factor) Dimensions (L / W / H) (cm)	194 / 124 / 118	220 / 170 / 188
Weight net (kg)	312	590
Model number	17AIDGHB603	53AI2PUD603
EAN	4 ⁰⁰⁸⁴²³ 858556	4 ⁰ 08423 ⁸⁶²⁰⁰³

ROBOTICS

With our range of fully autonomous robotic lawn mowers you have made the right decision. All there is to do is the simple installation of the boundary wire around the lawn and to define a place for the base station which is also the charging station for the LAWNKEEPER. With a quick one-time-setup you teach the mower the size and individual layout of your lawn and that's it! Your LAWNKEEPER will then automatically calculate the required mowing time to keep your lawn always perfectly cut during the entire mowing season. From now on you will have more free time, while the LAWNKEEPER does the mowing for you. Quiet, strong, fast, environmentally conscious and cost efficient.





LAWNKEEPER

ROBOTIC LAWN MOWERS FOR MORE LEISURE AND LESS WORK

Quick and easy to set up. The intuitive menu system on the display makes it easy to enter the mowing program, while the area to be mown can be quickly defined in just a few steps. Simply lay the boundary wire around the area to be mown and secure it in the ground with the included solid plastic pegs. You can exclude obstacles like bushes or ponds, while hard objects as in example a tree are automatically detected and avoided.

ACCURATE EDGE CUTTING

In edge-cutting mode, the LAWNKEEPER mows the edges of the lawn twice a week. Overlapping blades extending beyond the wheels ensure an accurate, clean cut right up to the edges. No need for time consuming finishing work!







Remote control

Navigate your LAWNKEEPER with the remote control or with your Smartphone (on all 600 & 1800). On 600 & 1800 we have a bluetooth remote control and on the 3000 an Infra red remote control.

With the remote control or smartphone app you can navigate your LAWNKEEPER effortlessly to a separate mowing zone, into narrow spots which are hard to reach, or back to the base station.





Changing the blades is so easy The blade can be replaced on all LAWNKEEPER models with the included blade removal tool within seconds.



Durable steel blades

All LAWNKEEPER come with hardened steel blades which will last for up to a whole season. The strong blades in combination with the continuously variable cutting height enable the mower to cut high grass and manage the first cut of the season. No need to use a conventional mower.



LAWNKEEPER

ONE TIME SETUP Easy installation and programming

No garden is alike. Some lawns are in one piece, others are subdivided in several zones and others have a separate zone which needs a cut too. The Cub Cadet LAWNKEEPER can handle all these different lawn types with ease.



Example: One Main Zone only



Example: Main Zone and Sub Zone



Example: Main Zone and Separate Zone



Scope of delivery



Easy installation



Simple one-time setup



Ready to mow!



Cutting width / Cutting height:	28 cm / 15 - 60 mm
Recommended area:	up to 600 m ²
Battery:	26 V 3 Ah lithium iron phosphate battery
Docking station:	yes
Model no.: 18BO06LF603	Price: *



Lawnkeeper 1800

Cutting width / Cutting height:	56 cm / 20 - 80 mm
Recommended area:	up to 1800 m ²
Battery:	26 V 4 Ah lithium iron phosphate battery
Docking station:	yes
Model no.: 18BO18LF603	Price: *



Lawnkeeper 3000

Cutting width / Cutting height:	56 cm / 20 - 80 mm
Recommended area:	up to 3.000 m ²
Battery:	26 V 6 Ah lithium iron phosphate battery
Docking station:	yes
Model no.: 18AO30LF603	

Price:





Random return – avoids leaving tracks

To recharge the battery, the LAWNKEEPER has to return to the charging station. It uses the boundary wire as a guide and follows it back to the charging station, but always on a slightly different route. This means that it does not leave tracks in the lawn.



Sensitive rain sensor

The housing of the mower and the blades have to be cleaned more often if the grass is mown in the rain. To avoid this, there is a rain sensor which prevents the mower from starting or let it stop mowing and return to the base station when it's raining. The sensitivity of the sensor to moisture can be individually set using the menu.



Battery maintenance kit to winterize

The LAWNKEEPER comes with a battery maintenance kit. Connected up to this system, it can spend the winter safely in your garage or tool-shed and the trickle charge keeps the battery healthy.




Floating cutting deck

(On models LAWNKEEPER 1800 & 3000) The unique design of the cutting deck support lets the deck float over uneven terrain, thus providing a perfect and even cut.



Low maintenance costs thanks to modular construction

Cleaning and maintenance are quick and simple thanks to the modular construction of all main components.

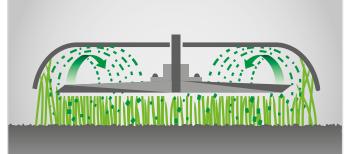

Mow and mulch at the same time

The LAWNKEEPER's mulching system cuts the grass into tiny particles at up to 4.000 rpm. This also "irrigates" the lawn, because grass consists of 90 % water. No need to compost or dispose of the clippings. Mulching is a natural fertilizer however it cannot provide all nutrients. Please ask your local dealer for special fertilizer for robotic mowers.

SUMMARY OF THE LAWNKEEPER TOP ADVANTAGES

In direct comparison with robotic mowers from other manufacturers, the Cub Cadet LAWNKEEPER impress by the following features:

 Edge mowing mode No more edge trimming required, expect on walls. Strong mowing motors Cut even high grass. Solid steel blades Cut a whole season. No need for a conventional mower for the first cut of the season! Fast Due to the large cutting width, the LAWNKEEPER models are much faster done with their job than other robotic mowers. No tracks The random return mode let the LAWNKEEPER drive back to the charging station in a different distance to the boundary wire every time. Newest battery technology Allows up to 2000 charging cycles - twice as many as with conventional Li-lon batteries. Remote control included No need for a walk behind mower to mow corners which are hard to reach. Smartphone App Download the free App and use your Smartphone as a remote control and to get full access to the settings of your 		
 Solid steel blades Cut a whole season. No need for a conventional mower for the first cut of the season! Fast Due to the large cutting width, the LAWNKEEPER models are much faster done with their job than other robotic mowers. No tracks The random return mode let the LAWNKEEPER drive back to the charging station in a different distance to the boundary wire every time. Newest battery technology Allows up to 2000 charging cycles - twice as many as with conventional Li-lon batteries. Remote control included No need for a walk behind mower to mow corners which are hard to reach. Smartphone App Download the free App and use your Smartphone as a remote control and to get full access to the settings of your 	✓ Edge mowing mode	No more edge trimming required, expect on walls.
 Fast Due to the large cutting width, the LAWNKEEPER models are much faster done with their job than other robotic mowers. No tracks The random return mode let the LAWNKEEPER drive back to the charging station in a different distance to the boundary wire every time. Newest battery technology Allows up to 2000 charging cycles - twice as many as with conventional Li-lon batteries. Remote control included No need for a walk behind mower to mow corners which are hard to reach. Smartphone App Download the free App and use your Smartphone as a remote control and to get full access to the settings of your 	✓ Strong mowing motors	Cut even high grass.
 No tracks No tracks The random return mode let the LAWNKEEPER drive back to the charging station in a different distance to the boundary wire every time. Newest battery technology Allows up to 2000 charging cycles - twice as many as with conventional Li-lon batteries. Remote control included No need for a walk behind mower to mow corners which are hard to reach. Smartphone App Download the free App and use your Smartphone as a remote control and to get full access to the settings of your 	Solid steel blades	
 Newest battery technology Allows up to 2000 charging cycles - twice as many as with conventional Li-Ion batteries. Remote control included No need for a walk behind mower to mow corners which are hard to reach. Smartphone App Download the free App and use your Smartphone as a remote control and to get full access to the settings of your 	✔ Fast	are much faster done with their job than other robotic
 Conventional Li-Ion batteries. Remote control included No need for a walk behind mower to mow corners which are hard to reach. Smartphone App Download the free App and use your Smartphone as a remote control and to get full access to the settings of your 	No tracks	the charging station in a different distance to the boundary
Smartphone AppDownload the free App and use your Smartphone as a remote control and to get full access to the settings of your	Newest battery technology	
remote control and to get full access to the settings of your	Remote control included	
LAWNKEEPER. (Only with LAWNKEEPER 600 and 1800)	Smartphone App	

ACCESSSORIES	ART. NO.	LAWNKEEPER 600	LAWNKEEPER 1800	LAWNKEEPER 3000	PRICES*
Additional base station	196-794-678		Х	Х	
Additional base station	196-809-678	х			
Additional limiter switch for boundary wire, with holder (battery not included)	196-795-678	Х	Х	Х	
Battery for limiter switch	196-796-678	Х	Х	Х	
Extra boundary wire (150 metres)	196-797-678	х	х	х	
Extra plastic pegs for boundary wire (50 pieces)	196-798-678	Х	Х	Х	
Extra connectors for boundary wire (10 pieces)	196-799-678	Х	Х	Х	
Remote control	196-810-678	Х	Х		
Remote control	196-804-678			Х	

8

		LAWNKEEPER 600
	Battery	26 V 3 Ah lithium iron phosphate battery
ERY- JEM	Running Time (min)	50-65
BATTERY- SYSTEM	Charging Time (min)	50-70
	Charging cycles	up to 2.000
USE	Recommended area (m ²)	up to 600
5	Maximum incline	19,2°/35 %; on the boundary wire: 10°/17,5 %
ECK	Cutting Width (cm)	28
CUTTING DECK	Cutting Height (mm)	15 - 60
50	Mowing Zones	1 Main zone + 1 sub zone, separate zones possible
-	Material	1 x FastAttach™ steel blade
BLADE	Blade Motor	1 x 200 W DC Brush
	Speed	Eco mode: 3.300 min ⁻¹ / Power mode: 4.000 min ⁻¹
	Bump Sensor	Standard
	Lift Sensor	Standard
SAFETY	Tilt Sensor	Standard
	PIN Code	Standard
	Alarm System	Standard
ES	Rain Sensor	Adjustable
PROPERTIES	Display	LE display
R	Wheels / Profile	Maximum traction
	Boundary wire	Standard
LIVERY	Pegs	Standard
SCOPE OF DELIVERY	Charging station	Standard
SCOPE	Remote control	Standard
	Smartphone APP	Remote control and full programming function
SN	LpA / LwA / LwAg (dB)	70 / 68 / 70
DIMENSIONS	Dimensions (L / W / H) (cm)	60,5 / 44 / 27
ΠO	Weight net (kg)	10,5
	Model number	18BO06LF603
	EAN	4 008423 857535
	Price*	

CubCadet.

LAWNKEEPER 1800	LAWNKEEPER 3000
26 V 4 Ah lithium iron phosphate battery	26 V 6 Ah lithium iron phosphate battery
60-85	90
90-120	90-120
up to 2.000	up to 2.000
up to 1.800	up to 3.000
19,2°/35 %; on the boundary wire: 10°/17,5 %	19,2°/35 %; on the boundary wire: 10°/17,5 %
56	56
20 - 80	20 - 80
1 Main zone + 4 sub zones, separate zones possible	1 Main zone + 4 sub zones, separate zones possible
 2 x FastAttach™ steel blade	2 x FastAttach™ steel blade
2 x 200 W DC Brush	2 x 150 W DC Brushless
Eco mode: 3.300 min ⁻¹ / Power mode: 4.000 min ⁻¹	Eco mode: 3.300 min ⁻¹ / Power mode: 4.000 min ⁻¹
Standard	Standard
Adjustable	Adjustable
Illuminated LC display	Illuminated LC display
Maximum traction	Maximum traction
Standard	Standard
Standard	Standard
Standard	Standard
Standard	(196-804-678)
Remote control and full programming function	-
70 / 72 / 74	70 / 72 / 74
73,5 / 66 / 31,5	73,5 / 66 / 31,5
19	19
18BO18LF603	18AO30LF603
4 ⁰ 08423 ^{857542¹}	4 ⁰ 08423 ⁸⁵⁵⁸³⁸

UTV

With the Cub Cadet UTV we combined a powerful and durable Yanmar Diesel engine with professional-grade Cub Cadet engineering and design.

If you have any harder jobs to do is the Cub Cadet UTV the right choice for you.







POWERFUL UTILITY. EXTREME VERSATILITY.

No matter what the job demands, the Cub Cadet UTV delivers. With its on-demand 4x4 system you get fourwheel drive performance at the flick of a switch. And with dual A-arm, independent suspension and adjustable coil-over shocks, no matter where you're headed, you will be traveling in comfort.





Powered by a Yanmar Diesel engine, the Cub Cadet 4×4 runs cleanly, quietly and efficiently. The direct-injection engine produces steady and constant horsepower no matter what the job. It has higher torque reserve giving the operator more power so that they can get more done.



Independent dual A-arm suspension with coil-over shocks provides 20 cm of wheel travel for an unbelievably smooth ride. You'll cruise over the most challenging terrain for a remarkably comfortable experience that you only get from the best utility vehicles.



Professional grade driver's seat A professional grade fully suspended driver's seat provides you with highest comfort.



HURST shifter With the Hurst shifter you have the choice of forward/ neutral/reverse and low speed forward gears.



Higher capacity Large tiltable bed with optional electric cylinder. It fits a Euro palet and is suitable for tough jobs.




Ergonomic dash board The ergonomic dash board is free from knick-knack and includes a tray for your belongings.



CVT Transmission

4-wheel drive: Once you switched to 4×4 , the UTV automatically turns into 4-wheel drive if more traction is needed - you do not have to press a button or operate a lever and can keep the 4×4 locked all time.

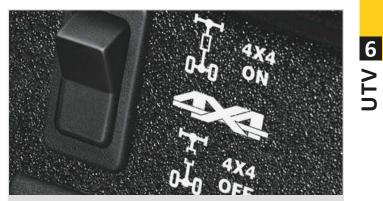

Easy switch to 4 x 4 With a rocker switch in the dash, you can switch from 4 x 2 to 4 x 4 if required.



FEATURES OF THE UTILITY VEHICLE

Welded steel frame

with box frame construction provides increased stiffness for stronger towing capability and industry-leading payload capacity. Large soft-grip steering wheel

plus rack-and-pinion steering reduce operator effort and provide optimal comfort.

Heavy-duty locking rear differential

drives torque equally to both rear wheels, supplying extra power, traction and control in severe conditions.

4-wheel hydraulic 20 cm disc brakes

with dual circuit master cylinder and stainless steel brake lines both offer exceptional control and stopping power.

> **23 cm of ground clearance** plus extra-wide wheel base and low center of gravity ensure stability under extreme conditions.

Full front and rear skid plates protect suspension and drive train components when exploring.





"Utility vehicle of the year 2012"

4 x 4 DIESEL

Engine:

Rated power (kW / min⁻¹): Drive: Yanmar Diesel, 3 Cylinder, 854 cm³ 16,3 / 3.600 CVT (Continuous Variable Transmission) with on dash switch from 2 WD to 4 WD

Model no.: 37AK466D603R

Price:


0TV 9

Cub Cadet.









ACCESSORIES	ARTICLE NO.	PRICES*
Cabin for 4 x 4, roof, wiper and windshield	196-206-603	
Cabin heating system (on dash assembly) connected to the engine cooling system	196-304-600	
Doors incl. rear window made of safety glass for cabin	196-303-600	
Beacon light for cabin	196-305-600	
2 Working lights H3 front for cabin	196-306-600	
1 Working light H3 rear for cabin	196-307-600	
Windscreen wash system for cabin	196-308-600	
Turf saving tires incl. rims, black (no road approval)	196-309-600	
Tire chains front wheels	196-893-678	
Tire chains rear wheels	196-966-678	
Soft cabin (no road approval)	39B-201-100	
Winch	39A70015100	
Head rest kit (not with hard cabin) (no road approval)	39A-207-100	
UV cover for 4 x 4	39A-211-100	
Electric bed lift (requires accessory harness 39A-209-100)	39B-212-100	
Floor mats for 4 x 4, rubber	39A-213-100	
Snow blade 183 cm with electric lift and bracket (requires accessory harness 39A-209-100)	39A-229-100	
Rockinger hitch	39A-242-600	
Plastic bed liner	39A70001100	
Electrical accessory harness. Installed when electrical accessories are used (e.g. electric bed lift, light bar, working lights) (front and rear)	39B-209-100	

		4x4 DIESEL
	Engine type	Yanmar Diesel, model 3TNV70
	Engine displacement	854 cm ³
	Rated power (kW / min ⁻¹)	16,4 / 3.600
ENGINE	Cylinders	3 in line, mid mounted
	Tank volume (capacity) (l)	21,5 Diesel
	Engine cooling	Water cooled with large radiator out front
	Max. engine torque (min ⁻¹)	/
-	Transmission	WD / CVT (Continuous Variable Transmission) with on dash switch from 2 WD to 4 WD
	Speeds	0 - 40 km/h max.
	Differential lock	Manual lever
	Gear box	Fully enclosed, oil bath
	Selector	Hurst shifter (H-L-N-R)
í	Tires	Tires all-terrain
	Wheel size (F/R)	25" x 10" x 12" / 25" x 11" x 12", 4 PR
	Power take off	-
5	Electrical system	12 V, negative earth
SYSTEM	Alternator rated power	12 V - 65 A
S.	12 V Power outlet	In-dash
	Ramp angle	28°
	Track width (min./max.)	1.269 / 1.358 mm
	Max. vertical load on coupling point	100 kg
	Wheel suspension	Adjustable coil over shock on all 4-wheels
	Spring travel	20 cm
	Brakes	20 cm diameter hydraulic disc on all 4-wheels
	Brake lines	Stainless steel braided
	Steering	Rack and pinion on front wheels
	Towing capacity (max.)	Unbraked: 750 kg, braked: 1100 kg
	Load platform	Steel, L = 110 cm, W = 131 cm, H = 29 cm
	Payload capacity (max.)	Without cabin: 420 kg, with cabin: 297 kg
	Wheelbase (cm)	198
	Ground clearance (foot platform) (approx.)	23 cm
	Ground clearance (bed) (approx.)	27 cm
	Max. turning angle of the wheels	37° to the right & left
	Turning radius (m)	4,05
	Storage	Glove box
	Road approval	All components already installed for homologation in EU countries
	Dimensions (L / W / H) (cm)	314 / 162 / 198
	Weight net (kg)	727
	Model number	37AK466D603R
	EAN	4 008423 842234

CHORE

Innovation, selection and performance are all strengths of the complete line of Cub Cadet chore performers. From the groundbreaking RT 65, over the CSV 060 up to the scrarifer CC V 40 B the Cub Cadet chore performers support you with a strong engine and a powerful performance during the whole gardening season.






GROUNDBREAKING IN EVERY SENSE OF THE WORD.

Thanks to the Cub Cadet garden tiller RT 65, the strenuous and time-consuming work of digging and loosening the soil by spade is a thing of the past.

Powerful and reliable, the tiller tackles any job - it breaks up even hard soil and facilitates seed preparation. It is ideal for areas of up to 1000 m².

Four self-sharpening, heat-treated, high-quality tine sets made of spring steel ensure excellent work results at a tilling width of 46 cm. The adjustable depth bar gives the machine better stability and allows the working speed and tilling depth to be controlled. The tiller has a forward and a reverse gear and is easy to maneuver. Acceleration, transmission and working direction can be controlled from the operator's position. The handle which is freely adjustable makes using the machine safe, comfortable and easy on your back.

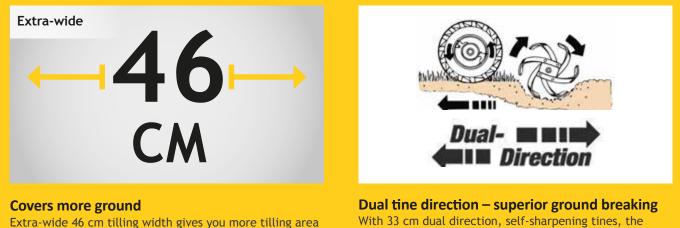

with each pass - so you can cover more ground at a time.

With 33 cm dual direction, self-sharpening tines, the Cub Cadet tiller provides fine cultivating and seedbed preparation in any soil.

Easy to use

Depth stake



Single-hand operation lets you stand to the side and steer the tiller with one hand. Comfortable full bail handle with soft grips.

Full adjustable depth stake.

Full cover

Fully covered tine set with 46 cm working width.

RT 65

Tilling width:	46 cm	
Engine:	CC OHV 65 H, 1 Cylinder, 208 cm ³	
Rated power (kW / min ⁻¹):	3,9 / 3.600	
Drive:	Dual Direction	
Model no.: 21AB45M8603	Price: *	

		RT 65
	Engine type	Cub Cadet 65 H OHV
	Engine displacement	208 cm ³
ENGINE	Rated power (kW / min ⁻¹)	3,9 / 3.600
_	Start	Pull
	Tank volume (capacity) (l)	2,2
	Tilling width (cm)	46
ΈM	Tines	4 (2 x 2) heat-treated, self-sharpening tines, 33 cm diameter
TILLING SYSTEM	Tine direction	Forward / reverse
TILLIN	Side shields	Standard
	Rear shield	With Rake
	Counter balance weight at front	Standard
DRIVE	Transmission	Wheeldrive system with forward and reverse gear
SYS	Wheels	355 mm, pneumatic, agricultural
_	Handle	Continously height adjustable for ergonomical and safe working
OPERATION	Clutch control	Full bail lever for lateral control. No side-to-side adjustment of the handle neccessary!
	Soft grip on the handle	Standard
	LpA / LwA / LwAg (dB)	98 / 108 / 110
SIONS	Vib. value hand-arm / (K-factor)	5 / 2,5 m/s²
DIMENSIONS	Dimensions (L / W / H) (cm)	172 / 61 / 114
	Weight net (kg)	104
	Model number	21AB45M8603
	EAN	4 008423 854015
	Price*	

* Recommended retail price of the manufacturer





CUT DOWN ALL THAT FALLS DOWN.

The all-in-one chipper shredder vacuum is the smartest tool for outdoor cleanup. It not only vacuums lawn debris, but also chips branches and shreds leaves. Its 60L, wide-mouth, dust-blocking collection bag is easy to empty, so you can clear more debris with less downtime. Plus, it's powered by an efficient 159cc Cub Cadet OHV engine and comes with a three-year limited warranty. So you can have professional results for years to come, without paying a professional. That's smart thinking.





Alternatively the included 2 m long vacuum hose with long grip and nozzle can be used to clean areas which are hard to reach. Simply flip the switch on the vac front nozzle to change from nozzle to hose function to clean under bushes or along a wall fast and effective.



Internal shredder blades are reducing the volume of leafs and small twigs in a relation of up to 8:1. After vacuuming and shredding the material is automatically transferred into the felt catcher.



The vacuum nozzle distance to ground can be adjusted in 5 different heights from 16 to 104 mm with an adjustment lever at the front wheels. This enables you to adapt the vacuum to individual conditions. A higher adjustment can be of advantage on gravel walkways while a lower adjustment would be preferred on solid grounds.

Separate chipper chute



Twigs and branches up to a max. diameter of 38 mm can get chipped by feeding them into the separate chipper chute. Two rotating hardened steel blades convert branches to fine mulch.



Working width:	61 cm
Engine:	CC OHV 55, 1 Cylinder, 159 cm ³
Rated power (kW / min ⁻¹):	2,7 / 3.600
Drive:	Push
Model no.: 24A-06MP603	Price: *

		CSV 060
	Engine type	Cub Cadet 55 OHV
	Engine displacement	159 cm ³
INE	Rated power (kW / min ⁻¹)	2,7 / 3.600
ENGINE	Start	Pull
	Tank volume (capacity) (l)	1,0
	Choke for easy starting	Standard
	Working width (cm)	61
ΕM	Vacuum volume	34 m ³ / min.
SYSTI	Separate chipper chute	Standard
WORKING SYSTEM	Max. branch diameter	up to 38 mm, depending on the material
Ň	Vac nozzle adjustment	Individual (16 - 104 mm)
	Reduction ratio	up to 8:1
ILS	Wheel drive	-
DRIVE / WHEELS	Speed	-
	Wheel size (Front/Rear)	200 mm / 230 mm
DF	Wheel bearings	Ball bearings
U	Catcher bag	Felt, for dust reduction
BAGGING	Bag capacity (l)	60
ß	Vacuum hose	On board, 2 m long
	Handle	Straight, foldable
COMFORT	Safety switch	Engine does not start without collector bag mounted
	Safety glasses	Standard
	LpA / LwA / LwAg (dB)	98 / 108 / 110
DIMENSIONS	Vib. value hand-arm / (K-factor)	5 / 1,5 m/s ²
DIME	Dimensions (L / W / H) (cm)	93 / 43,5 / 92,5
	Weight net (kg)	44
	Model number	24A-06MP603
	EAN	4 008423 857757
	Price*	

Cub Cadet.

SCARIFIER

BEAUTY TREATMENT FOR YOUR LAWN.

Scarifying is an important part of the perfect lawn care. It helps to fight against the notorious thatch which is formed in every lawn and is blocking the supply of air, water and nutrients to the roots.

Correct scarifying will let the lawn breathe again. The Cub Cadet scarifier CC V 40 B will bring the right power to remove this thatch so that sunlight, air and water can reach again the soil and roots.

Above that, the CC V 40 B disposes of blades and springs. This allows for two functions in one machine: aerating and scarifying.






The CC V 40 B has 17 flail double blades and 16 double springs. This combination allows for two functions in one machine - for aerating and scarifying. If you would like to aerate the soil of your garden, use the higher position with a gentle touch of the blades and springs on the surface of the soil. If there is the need to scarify, use a deeper position of the blades and springs which allows having a more aggressive action on the surface.

Important lawn care information:

After scarifying your lawn, please don't forget to reseed blank spots and to feed it with fertilizer and water. Your local dealer will be happy to provide you with further information.





The working depth of the Cub Cadet scarifyer CC V 40 B can easily be changed centrally.

Remote transport position



With the lever on the handle you can switch from transport to working position conveniently from behind the unit.



CC V 40 B

Working width:	40 cm
Engine:	CC 35 H OHV, 1 Cylinder, 123 cm ³
Rated power (kW / min ⁻¹):	2,3 / 3.600
Drive:	Push
Model no.: 16BH8AMQ603	Price: *

		CC V 40 B	
	Engine type	Cub Cadet 35 H OHV	
1.1	Engine displacement	123 cm ³	
ENGINE	Rated power (kW / min ⁻¹)	2,3 / 3.600	
ш	Engine start	Pull	
	Tank volume (capacity) (l)	1,7	
TEM	Drive	Push	
DRIVE SYSTEM	Number of speeds	-	
DRIV	Speed (max)	-	
	Chassis (material)	Steel body with plastic cover	
	Working width (cm)	40	
DOH.	Tine re-adjustment	Infinite / central	
3 MET	Adjustment range (mm)	0 to -15	
WORKING METHOD	Transport position	Standard	
Ŵ	Collecting	Standard	
	Rear discharge without collector	Standard	
	Aerating	Standard	
	Blade drive	Belt	
BLADES	Verticutter blades	34 (17 double)	
BLA	Diameter of blades (mm)	163	
	Aerating springs	32 (16 double)	
ÿ	Grass catcher type	Soft bag, included	
BAGGING	Grass catcher (capacity) (l)	60	
8	Bag full indicator	-	
EELS	Wheels (F/R) (mm)	200 / 200	
WHE	Double ball bearings	Standard	
	Washing nozzle	-	
	Handle type	Ergonomic	
RТ	Foldable handle	Standard	
DIMENSIONS	Height adjustable handle	-	
	Soft grip on the handle	-	
	Handle grip at the front end	Standard	
	Cub Cadet double action system	scarifying & dethaching	
	LpA / LwA / LwAg (dB)	86 / 96 / 98	
	Vib. value hand-arm / (K-factor)	5 / 1,5 m/s²	
DIME	Dimensions (L / W / H) (cm)	80 / 62 / 61	
	Weight net (kg)	36	
	Model number	16BH8AMQ603	
	EAN	4 008423 853223	
	Price*		

* Recommended retail price of the manufacturer

CHORE 2



SNOWTHROWERS

Whatever winter brings your way, throw it back with an X Series Snow Thrower. This powerful line of snow throwers has been built to quickly and easily clear extreme snow conditions with incredible control, maneuverability and strength. With the award-winning 1X and 2X models and the first-of-its kind 3X three-stage power, you'll be sure to find the exact level of snow removal power you need with the strength and quality you demand.






bCadet

THREE-STAGE

THREE STAGE

THE ULTIMATE IN X SERIES STRENGTH

The 3X three-stage power is the flagship of the Cub Cadet snow thrower line. It clears deep snowfall up to 50 % faster than a traditional Cub Cadet 2X two-stage snow thrower and allows you to easily and quickly remove 18 inches of snow at a comfortable pace. It will even clear the wall of winter that the snowplow makes at the end of your driveway.

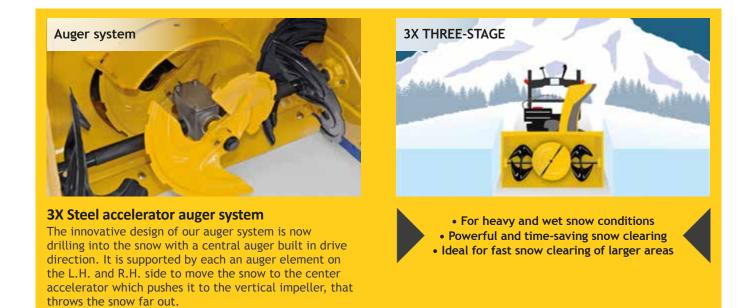

The revolutionary 3X-Series with 3-stage technology. At first stage two X-treme segments in the outer part of the auger housing are pushing the snow to the center, where at second stage a central X-treme segment drills through the snow and pushes it to the third stage, the impeller, which powerfully throws the snow through the chute channel far away into the desired direction.



CubCadet



SNOWTHROWERS





OHV Winter engines with large fuel tanks The Cub Cadet 4-cycle OHV winter engines offer improved starting and a low emission and are especially developed for low temperatures. The large fuel tank allows for a long working without refueling. Thanks to their large displacement they offer enough power even in toughest conditions.



Electric start Thanks to the 23

Thanks to the 230 Volt electric start, you can conveniently start your snow thrower by just connecting it with a socket-outlet and pressing the starter button. One push and you are ready to go.



Clutch lock

The clutch lock system keeps both the drive clutch and auger clutch engaged with just one hand. This gives the possibility to change the chute direction or ground speed during operation. A big time saving element and more comfort while out in the snow.



Shear bolts

The shear bolts connect the "Xtreme Auger" segments with the drive shaft. If one "Xtreme Auger" segment blocks, the shear bolt of this particular segment will act as a rated break point, which prevents other turning parts from breaking. After replacing the shear bolt, the snow thrower is ready for use again.



Fingertip trigger controls

Zero-turn power steering is at the tip of your fingers to help you get the job done faster with effortless, singlehand turning. Easily manoeuvre driveways of all shapes and sizes, so you can get the job done in less time and with less effort.





Working lights The bright in-dash headlights allow a safe handling even in the darkness.



1. Packed snow: Bringing the lever in the "packed snow" position, the weight is shifted to the front end of the snow thrower and presses this on to the ground.

2. Normal snow: This position allows the user to easily manoeuver the unit in normal snow conditions.

3. Gravel position: Use this position when clearing gravel or split walkways from snow to prevent gravel to be picked up.

4. Transport position: In this position the auger housing is lifted off the ground for easy moving without leaving scratches on the pavement.



Clearing width / Intake height:	66 cm / 58 cm
Engine:	Cub Cadet 90, 357 cm ³
Rated power (kW / min ⁻¹):	7,4 / 3.600
Speeds:	6 forward / 2 reverse
Model no.: 31AY55KX603	Price: *



Clearing width / Intake height:	71 cm / 58 cm
Engine:	Cub Cadet 90, 357 cm ³
Rated power (kW / min ⁻¹):	7,4 / 3.600
Speeds:	6 forward / 2 reverse
Model no.: 31AY55KY603	Price: *



Price:

Model no.: 31AY57KZ603



Clearing width / Intake height.	
Engine:	Cub Cadet 130, 420 cm ³
Rated power (kW / min ⁻¹):	8,3 / 3.600
Speeds:	6 forward / 2 reverse
Model no.: 31AY77KZ603	Price: *

SNOWTHROWERS



STRENGTH IN CHOICES AND PERFORMANCE

If you need to clear larger spaces, a Cub Cadet 2X two-stage power snow thrower is the right choice. The selfpropelled 2X can tackle winter weather on any surface and features a steel auger that collects snow in the first stage and launches snow out of the chute to complete the second stage. The 2X series offers a full array of clearing width options to battle Old Man Winter.




[118] SNOWTHROWERS

Heated hand grips



Keep your hands warm to finish the job in comfort! To activate the heated grips, iust move the switch found on the rear of the dash panel into the ON position. The handles stay warm and you can keep working through the coldest weather.

Safety first



All our snow throwers are equipped with a spring loaded finger guard, which prevents you from injuries but can tilt back when heavy snow loads need to get through.



The tires have a special X-Trac tread. This allows for a perfect grip in the snow. No snow chains required!

COOL BLUE skid shoes



The revolutionary COOL BLUE skid shoes glide along surfaces for better manoeuverability. The advanced long-lasting material won't rust or mar your drive way. The space between the shave plate and the ground can be adjusted by raising or lowering the skid shoes.

Drift cutters



The drift cutters which are mounted on both sides of the auger housing, break deep snow banks away and thus allow the snow thrower to power through even the heaviest drifts. Better performance and easier working in extremely deep snow.

High discharge chute




The discharge chute is exceedingly high and consists of plastic on the 2X Series. It is clog-resistant and assures an optimal discharge of the snow. Snow throwing direction and width can be adjusted conveniently from the dashboard.



524 SWE

Clearing width / Intake height:	61 cm / 53 cm
Engine:	Cub Cadet 70, 208 cm ³
Rated power (kW / min ⁻¹):	3,9 / 3.600
Speeds:	6 forward / 2 reverse
Model no.: 31AW53LR603	Price: *

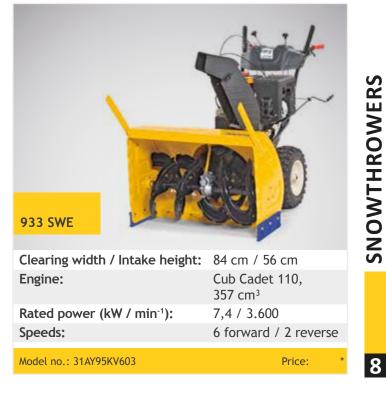






COMPACT SIZE. ENORMOUS STRENGTH.

made of reinforced heavy duty rubber to avoid damages to the pavement. You will clear your driveway and

sidewalk with less effort.

The 1X single-stage power is ideal for quickly and easily removing six inches of snow from smooth, smaller areas. 1X snow throwers pack quite a punch. A single-stage high-performance auger efficiently scoops and discharges snow accumulation to clear the way all winter.

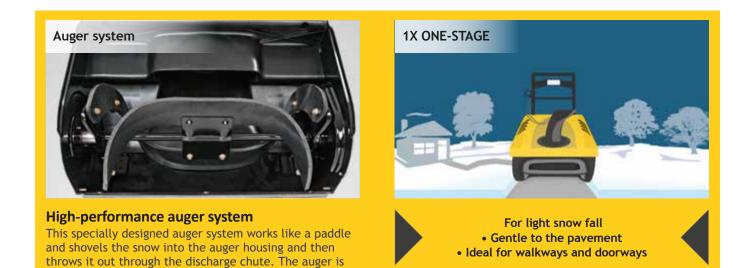



Throw the snow in any direction you want, with the on-dash remote control. Conveniently, comfortable and effortless.



Large and easy to access control elements make it simple to control the power even with winter gloves. It's incredibly easy to start in tough winter conditions thanks to the 230 Volt electric starter.

Electric start & large control buttons



The extra large mitten grip starter handle is just another well engineered detail which makes the difference of this premium snow thrower.



Provides clear information on the fuel level without the need for opening the gas cap.

Ergo-handle



Ergo-handle with full bail switch allows for fatigueproof operation.

	221	LHP
--	-----	-----

Clearing width / Intake height:	53 cm / 33 cm
Engine:	Cub Cadet 70, 208 cm ³
Rated power (kW / min ⁻¹):	3,9 / 3.600
Drive system:	Auger-assist
Model no.: 31AR2T6D603	Price:

WINTER ACCESSORIES



Cub Cadet

Dozer blade

- Suitable for all Cub Cadet 2X and 3X Series snow throwers, 100 cm working width, zinc coated, pivoting to the right and left, with FastAttach™, weight incl. packaging 20 kg
- Optional rubber lip

Dozer blades



Mod. no.: 396-004-678 Price:

4 008423 815832 Mod. no.: 396-005-678 Price:

008423 807684

Mod. no.: OEM-190-833 Price:

Front mount sweeper

weight incl. packaging 34 kg

• Fits 1000 series rear discharge tractors, 105 cm working width, full remote control from driver's seat, belt drive system and front mount bracket included, weight: incl. packaging 61 kg

• 117 cm dozer blade, fits all 700 and 1000 series lawn

system, 3 angling options (left, right, straight), with

remote lifting handle to operate from the driver's seat,

tractors, with adjustable spring loaded overload protection

• Front collector for front sweeper model 196-226C678

4 008423 856545

Mod. no.: 196-226C678 Price:

4 008423 828511 Mod. no.: 196-227A678 Price:

4 008423 808261

Mod. no.: 190-454A000

4 008423 804492 Mod. no.: 190-701-000

4 047427 520458

Mod. no.: 2024-U1-0005

Price:

Price:

Price:



- Push spreader, 23 kg tray capacity, weight approx. 4 kg



Cover for snow throwers

• Fits all Cub Cadet snow throwers, heavy gauge vinyl cover with straps, it is UV-resistant and water-repellent, measurements: approx. 170 x 80 x 100 cm, weight: incl. packaging 1,3 kg



Shear bolts

- For all models except 933 SWE, The shear bolts connect the auger with the drive shaft. In case of unintended blocking of the auger, the shears act as rated break points. Set of 4 bolts and cotter pins. Weight incl. packaging 0,07 kg
- For model 933 SWE, weight incl. packaging 0,08 kg

Winter engine oil

• We recommend the use of Cub Cadet winter oil for all Cub Cadet snow throwers. Special winter engine oil (SAE 5W-30), capacity 1000 ml, weight incl. packaging 0,95 kg

4 008423 821871

Mod. no.: 7011-M6-0010 Price:

4 008423 829259

Mod. no.:7011-M6-0011 Price:



Mod. no.: 6012-X1-0040 Price:





- Spreader, push, 59 kg tray capacity, solid pro construction



Fuel stabilizer "Easy-Run"

• Snow throwers have often long period of non-use. Therefore, we recommend to use a fuel stabilizer. This fuel conservation with oxidation protection binds water and protects the system against rust and corrosion. A reliable starting is thus assured. Capacity 250 ml, weight: incl. packaging 0,25 kg



Mod. no.: 6012-X1-0045 Price:



Tractor shown with dozer blade, spreader & snow chains

Cub Cadet.


	526 HD SWE	528 HD SWE	530 HD SWE	
4-cycle OHV Winter engine	Cub Cadet 90, 357 cm ³	Cub Cadet 90, 357 cm ³	Cub Cadet 130, 420 cm ³	
Nominal power (kW / min ⁻¹)	7,4 / 3.600	7,4 / 3.600	8,3 / 3.600	
Starter	230 V electric start	230 V electric start	230 V electric start	
Fuel capacity	4,7 l	4,7 l	4,7 l	
Clearing width / Intake height	66 cm / 58 cm	71 cm / 58 cm	76 cm / 58 cm	
Cool Blue skid shoes	Heavy duty polymer - prevent scratches	Heavy duty polymer - prevent scratches	Heavy duty polymer - prevent scratches	
Auger diameter / material	30 cm / steel	30 cm / steel	30 cm / steel	
Auger system	3-stage, with Xtreme- Auger segments	3-stage, with Xtreme- Auger segments	3-stage, with Xtreme- Auger segments	
Impeller diameter	30 cm	30 cm	30 cm	
Grease fittings	maintenance free	maintenance free	maintenance free	
Power Steering	Fingertip trigger controls	Fingertip trigger controls	Fingertip trigger controls	
Speeds	6 forward / 2 reverse	6 forward / 2 reverse	6 forward / 2 reverse	
Tires	16" x 4,8", X-Trac bolded Winter tread	16" x 6,5", X-Trac bolded Winter tread	16" x 6,5", X-Trac bolded Winter tread	
Chute rotation	crank / 200°	crank / 200°	crank / 200°	
Pitch control	2-way-joystick	2-way-joystick	2-way-joystick	
Heated hand grips	Standard	Standard	Standard	
Headlight	28 V / 28 W	28 V / 28 W	28 V / 28 W	
Sound pressure level measured LpA (dB)	89	90	90	
Sound power level LwA (dB)	99	100	100	
Sound power level guaranteed LwAg (dB)	101	102	102	
Vibration value AHV Hand/Arm (m/s²)	5,0	5,0	5,0	
Uncertainty Hand/Arm (m/s ²) (K Factor)	1,5	1,5	1,5	
Dimensions (L / W / H) (cm)	140 / 72 / 110	140 / 77 / 110	140 / 80 / 110	
Weight net (kg)	116	118	120	
Model number	31AY55KX603	31AY55KY603	31AY57KZ603	
EAN	4 008423 857191	4 ⁰⁰⁸⁴²³ 857207	4 ¹ 008423 ¹ 857214	
Price*				
	Nominal power (kW / min*) Starter Fuel capacity Clearing width / Intake height Cool Blue skid shoes Auger diameter / material Auger system Impeller diameter Grease fittings Power Steering Speeds Tires Chute rotation Pitch control Headlight Sound pressure level measured LpA (dB) Sound power level guaranteed LwAg (dB) Vibration value AHV Hand/Arm (m/s²) Vibration s(L / W / H) (cm) Weight net (kg) Model number EAN	4-cycle OHV Winter engineCub Cadet 90, 357 cm³Nominal power (kW / min')7,4 / 3,600Starter230 V electric startFuel capacity4,7 lClearing width / Intake height66 cm / 58 cmCool Blue skid shoesHeavy duty polymer - prevent scratchesAuger diameter / material30 cm / steelAuger system3-stage, with Xtreme- Auger segmentsImpeller diameter30 cmGrease fittingsmaintenance freePower SteeringFingertip trigger controlsSpeeds6 forward / 2 reverseTires16" x 4,8", X-Trac bolded Winter treadOthute rotationcrank / 200"Pitch control2-way-joystickHeadlight28 V / 28 WSound pressure level measured LpA (dB)89Sound power level guaranteed LwAg (dB)101Vibration value AHV Hand/Arm (m/s²) (K Factor)1,5Dimensions (L / W / H) (cm)140 / 72 / 110Weight net (kg)116Model number31AY55KX603EANAuger Stager, Stard	4-cycle OHY Winter engineCub Cadet 90, 357 cm³Cub Cadet 90, 357 cm³Nominal power (kW / min*)7,4 / 3.6007,4 / 3.600Starter230 V electric start230 V electric startFuel capacity4,7 14,7 1Clearing width / Intake height66 cm / 58 cm71 cm / 58 cmCool Blue skid shoesPleavy duty polymer - prevent scratches90 cm / steelAuger diameter / material30 cm / steel30 cm / steelAuger system3-stage, with Xtreme- Auger segments3-stage, with Xtreme- Auger segmentsImpeller diameter30 cm30 cmGrease fittingsmaintenance freemaintenance freePower SteeringFingertip trigger controlsFingertip trigger controlsSpeeds6 forward / 2 reverse6 forward / 2 reverseChute rotationcrank / 200*crank / 200*Pitch control2-way-joystick2-way-joystickHeated hand gripsStandardStandardSound power level luwA (dB)99100Sound power level luwA (dB)101102Vibration value AHY Hand/Arm (m/s*) (K Factor)1,51,5Dimensions (L / W / H) (cm)140 / 72 / 110140 / 77 / 110Weight net (kg)116118Model number31AY55KX60331AY55KY603EANQuint and anter stress s	4-cycle OHV Winter engineCub Cadet 90, 357 cm²Cub Cadet 90, 357 cm²Cub Cadet 130, 420 cm²Nominal power (XW / min²)7, 4 / 3, 6007, 4 / 3, 6008, 3 / 3, 600Starter230 V electric start230 V electric start230 V electric startFuel capacity4, 7.14, 7.14, 7.1Clearing width / Intake height66 cm / 58 cm71 cm / 58 cm76 cm / 58 cmCool Blue skid shoesHeavy duty polymer - prevent scratchesHeavy duty polymer - prevent scratchesHeavy duty polymer - prevent scratchesAuger diameter / material30 cm / steel30 cm / steel30 cm / steelAuger diameter / material30 cm30 cm30 cm30 cmGrease fittingsmaintenance freemaintenance freemaintenance freePower SteeringFingertip trigger controlsFingertip trigger controlsFingertip trigger controlsSpeeds6 forward / 2 reverse6 forward / 2 reverse16' s 6, 5', X Trac bolded Winter tread16' s 6, 5', X Trac bolded Winter tread16' s 6, 5', X Trac bolded Winter tread16' s 6, 5', X Trac bolded Winter tread100Chute rotationcrank / 200'crank / 200'crank / 200'2.8 V / 28 WSound pressure level measured LpA (db)99100100Sound pressure level measured LpA (db)101102102Vibration value AHV Hand/Arm (m/s²)5,05,05,05,0Uncertainty Hand/Arm (m/s²)5,05,05,05,0Sound prever level measured LpA (db) <td< th=""></td<>

cubcadet.eu

730 HD TDE	524 SWE	933 SWE	221 LHP
Cub Cadet 130, 420 cm ³	Cub Cadet 70, 208 cm ³	Cub Cadet 110, 357 cm ³	Cub Cadet 70, 208 cm ³
8,3 / 3.600	3,9 / 3.600	7,4 / 3.600	3,9 / 3.600
230 V electric start	230 V electric start	230 V electric start	230 V electric start
4,7 l	1,9 l	4,7 l	1,9 l
76 cm / 58 cm	61 cm / 53 cm	84 cm / 56 cm	53 cm / 33 cm
Heavy duty polymer - prevent scratches	Heavy duty polymer - prevent scratches	Heavy duty polymer - prevent scratches	Scraper Polymer / reversible
30 cm / steel	30 cm / steel	41 cm / steel	23 cm / reinforced heavy duty rubber
3-stage, with Xtreme- Auger segments	2-stage, with Xtreme-Auger segments	2-stage, with Xtreme-Auger segments	Single stage
30 cm	30 cm	41 cm	-
maintenance free	on auger bearings	on auger bearings	_
Fingertip trigger controls	Fingertip trigger controls	Fingertip trigger controls	-
6 forward / 2 reverse	6 forward / 2 reverse	6 forward / 2 reverse	Auger-assist
Track drive	15" x 5", X-Trac bolded, Winter tread	16" x 6,5", X-Trac bolded, Winter tread	Wheels 8" x 2", ball bearings
crank / 200 $^\circ$	4-way-joystick / 200°	crank / 200°	Remote lever / 190°
2-way-joystick	4-way-joystick	2-way-joystick	Remote lever
Standard	Standard	Standard	-
28 V / 28 W	28 V / 28 W	28 V / 28 W	12,8 V / 21 W
91	88	91	88
101	98	101	98
103	100	103	100
5,0	5,0	5,0	5,0
1,5	1,5	1,5	1,5
137 / 80 / 110	137 / 65 / 111	171 / 88 / 113	107 / 58 / 110
125	84	150	41
31AY77KZ603	31AW53LR603	31AY95KV603	31AR2T6D603
4 008423 857221	4 008423 852233	4 008423 852325	4 008423 852370



NOTES

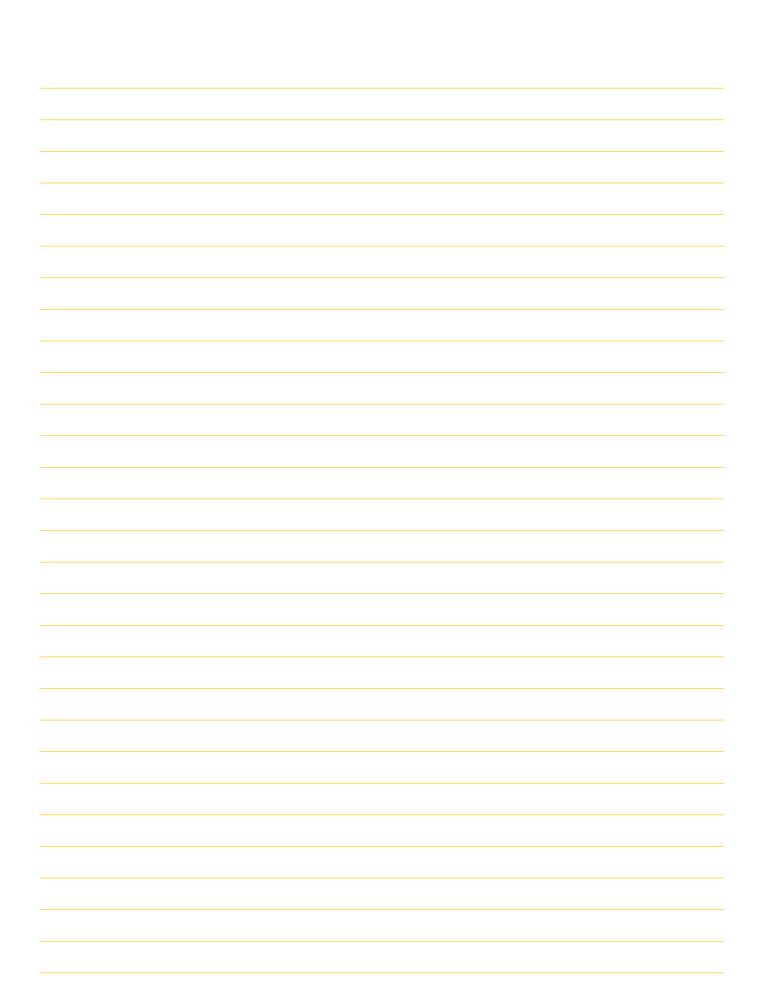



MTD Products Aktiengesellschaft Industriestraße 23 • 66129 Saarbrücken Tel.: 0049 (0) 68 05 / 79-528 • Fax: 0049 (0) 68 05 / 79-401 www.mtdproducts.eu • e-mail: mtdeurope@mtdproducts.com

© 2015 MTD Products Aktiengesellschaft, Germany. All rights reserved. Cub Cadet and other product signs are registered trademarks of the MTD Products Group. For more information please visit our website: www.cubcadet.eu. Amendments due to misprint or errors are reserved. All prices with VAT, as long stock lasts. (Status: September, 2015)