

Cub Cadet

ENDURO SERIES™

**QUALITY
AND
PRECISION
FOR THE
EXPERIENCED
GARDENER**



XT
ENDURO SERIES™

**THE LEADING
LAWN TRACTORS
ON THE MARKET**



2019

Cub Cadet[®]

XT
ENDURO SERIES[™]

**STRONG,
POWERFUL
AND AGILE.**

Powerful performance, agility and market leading innovations make the XT Enduro Series the best lawn tractors Cub Cadet has ever built.

Designed for the expert gardener the XT Enduro Series boasts the tightest turning circle on the market, especially useful if your lawn has obstacles such as trees and shaped beds.

The power and performance of the XT Enduro will allow you to finish your work faster and with better results - meeting and exceeding your high expectations.

OUR TOP 5 MARKET LEADING FEATURES

1.

MARKET LEADING CUTTING, COLLECTING AND MULCHING 3-IN-1 SYSTEM

3-in-1 option means that you have the choice between collecting the clippings, or discharging them out the back. You also have the option to buy an additional mulch kit as an accessory.



THE SMALLEST TURNING CIRCLE ON THE MARKET

Unbeatable efficiency even in confined spaces thanks to innovative TIGHT TURN XTREME Technology on all XT2 models.

2.

3.

ULTRA-STURDY, CORROSION-RESISTANT FRAME

Ultra-rigid frame for top durability.



PERFECTLY MATCHED TRANSMISSION AND ENGINE POWER

Optimal drive system and the most powerful engine in its class.

4.


5.

ULTRA-RELIABLE V-BELT DESIGN

Improved V-belt design reduces belt tension ensuring longer belt life and impressive stability. The XT2 PS117i and XT3 QS137 tractors are also equipped with a welded fabricated mowing deck.



MORE GREAT FEATURES THAT MAKE YOUR MOWING EASIER




GRASS BAG WITH ELECTRONIC EMPTYING

At the touch of a button, the grass bag lifts up and tips the cuttings out, even when the bag is full. (Fitted on XT2 PR106ie & XT3 QR106e).



DIAGONAL ADJUSTABLE SEAT

The seat can be adjusted to suit you and provide pure comfort whilst you mow.




POWERFUL KAWASAKI V-TWIN ENGINE

A two-cylinder engine for challenging terrain. Ultra-smooth running with low fuel consumption.

XT MODELS WITH KAWASAKI V-TWIN ENGINES:

XT2 PR95, XT2 QR106, XT2 PS107, XT2 PS117, XT3 QS127, XT3 QS137, XT3 QR106e



USB SOCKET

You can charge your phone while mowing using the multifunction socket on the XT2 and XT3 models.



MEMORY CURSOR

A cutting height memory cursor which displays your most frequently used and/or favorite cutting heights.



CUB CADET APP – THE SMART WAY TO STAY CONNECTED


Want to know when your next oil change is due, when the blades need to be replaced, or how many operating hours your XT lawn tractor has clocked up?

Simply download the Cub Connect Bluetooth® App.


Use your smart phone to view the operating status and any maintenance information about your Cub Cadet XT2 or XT3 lawn tractor. You can even charge your phone while mowing using the multifunction socket on these models.




OPERATORS MANUAL
Direct online access to the manual for your XT lawn tractor.



OPERATING HOUR COUNTER
The operating hour counter tells you how many hours your XT lawn tractor has worked.



MAINTENANCE SCHEDULES
Various maintenance schedules inform you how many operating hours remain until the oil, air filter and blades need changing. You can also check the battery charge status here.



LOCAL DEALERSHIPS
Find out where your nearest Cub Cadet dealership is and how to get there.

Cub Cadet[®]

DESIGNED FOR FUEL EFFICIENCY AND RELIABLE PERFORMANCE

THE CUB CADET EFI ENGINE –

A WHOLE HOST OF BENEFITS

- Lower fuel costs (uses up to 25% less than carburetor engines that deliver comparable performance) saving you both time and money when you refuel.
- Large engine displacement for miles of mowing power: 679 cm³.
- Engine no longer requires a manual choke. Simply take a seat, push the start button and get mowing.
- Improved driving characteristics (cold running performance, power consumption, no afterburning or continued running).
- Less servicing required thanks to direct fuel injection. No carburetor to drain, so you save on maintenance.
- Eco-friendly due to reduced emissions.
- Simple troubleshooting and diagnostic system for direct fuel injection lets dealers service models faster.

THE FOLLOWING XT MODELS FEATURE THE CUB CADET EFI ENGINE:

XT2 PR106ie, XT2 PS117i



Cub Cadet[®]
ENGINES

WHICH XT ENDURO TO CHOOSE? THE XT ENDURO SERIES™ AT A GLANCE

XT1
ENDURO SERIES™

XT2
ENDURO SERIES™

XT3
ENDURO SERIES™



MARKET LEADING CUTTING, COLLECTING AND MULCHING SYSTEM

- All-new grass collecting system and the rear-discharge mowing decks.
- With twice the grass-catching of previous Cub Cadet lawn tractors.
- Best direct collect rear discharge on the market.
- Push-button switch-on.

320 LITRE BAG CAPACITY

360 LITRE BAG CAPACITY

**HYDROSTATIC
V-BELT**

HYDROSTATIC POWER TRANSMISSION




Smooth drive system – simply put your foot on the pedal and go

POWERFUL CUB CADET ENGINE
reliable and high performance engine
(XT1 OS96, XT1 OS107, XT1 OR95,
XT1 OR106)

**EFFICIENT CUB CADET
EFI V-TWIN ENGINE**
2-cylinder engine
(XT2 PR106ie, XT2 PS117i)
KAWASAKI V-TWIN ENGINE
(XT2 PR95, XT2 QR106, XT2 PS107,
XT2 PS117)

KAWASAKI V-TWIN ENGINE
2-cylinder engine for difficult terrain,
ultra-smooth running
and low fuel consumption
(XT3 QS127, XT3 QS137,
XT3 QR106e)

EASIEST STEERING SYSTEM ON THE MARKET

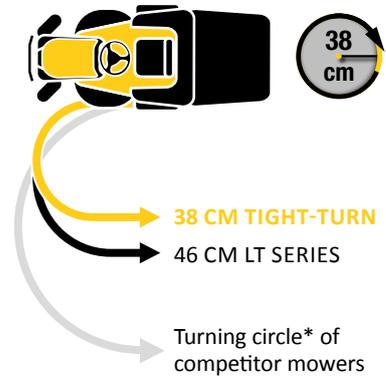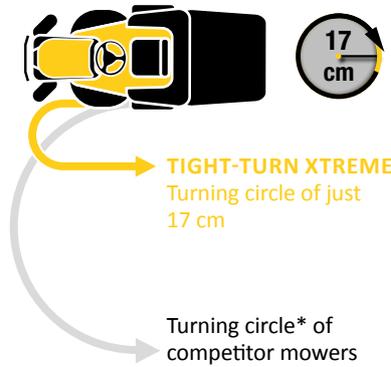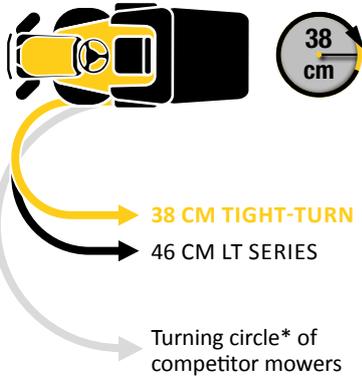

CUB CONNECT BLUETOOTH® APP

ELECTRIC GRASS BAG LIFTER for XT2 PR106ie & XT3 QR106e

KEY START

PUSH BUTTON START

SOLID, WELDED MOWING DECK for XT2 PS117i & XT3 QS137

12V MULTI-FUNCTION CHARGING SOCKET; CHARGE BATTERIES AND
MOBILE DEVICES WHILE YOU DRIVE

ANTI-DUST GRASS BAG SYSTEM
AVAILABLE AS AN OPTIONAL EXTRA

ANTI-DUST SYSTEM
Rear discharge with multi-layer dust
apron included in accessories. The apron
protects against flying grass and dirt

ALL-GROUND TRACTION SYSTEM
Perfect traction even on heavy ground –
thanks to mechanical
differential lock

*The turning circle of a lawn tractor involves marking the position of the left rear wheel while the tractor completes a 360-degree circle (on plain ground). Now you measure the distance between the mark and the actual position of the left rear wheel again. Half this distance is the turning circle – included in all product specifications.

Cub Cadet®

XT1™

ENDURO SERIES™



UNBELIEVABLE POWER & EFFICIENCY

The Cub Cadet XT1 lawn tractors are ideally equipped for mowing, collecting and transporting clippings and can be expanded with a range of accessories.

3-in-1
OPTION

POWERED BY
Cub Cadet



XT1 OS96

Cutting width:	96 cm / 38"
Mowing area:	6,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

KEY BENEFITS



DIAGONAL ADJUSTABLE SEAT
Individually adaptable – pure comfort for all users.



PUSH BUTTON BLADE START
Activate the cutting blades safely and more efficiently.



MECHANICALLY SUPPORTED CUTTING HEIGHT ADJUSTMENT
Quickly and easily select the perfect setting.



HYDROSTATIC DRIVE SYSTEM
Smooth drive system for precise mowing – simply put your foot on the pedal and go.

MODELS AVAILABLE



XT1 OS107

Cutting width:	107 cm / 42"
Mowing area:	8,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



XT1 OR95

Cutting width:	95 cm / 38"
Mowing area:	5,500 m ² /h
Grass bag capacity:	320 l
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



XT1 OR106

Cutting width:	106 cm / 42"
Mowing area:	7,500 m ² /h
Grass bag capacity:	320 l
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

Cub Cadet[®]

XT2[™]
ENDURO SERIES[™]



POWER FOR GREATER CHALLENGES

The Cub Cadet XT2 offers you an even higher level of power, control functions and durability. XT2 lawn tractors are the most agile in the XT Series thanks to Tight Turn Xtreme making them ideal for working on tough terrain, transporting and using additional accessories, whatever the season. At just 17 cm turning circle the XT2 series have the tightest turning radius on the market. Innovative tight turn technology delivers unsurpassed capability in tight places.

KEY BENEFITS



DIAGONAL ADJUSTABLE SEAT
Individually adaptable – pure comfort for all users.



MECHANICALLY SUPPORTED CUTTING HEIGHT ADJUSTMENT
Quickly and easily select the perfect setting.



PUSH BUTTON BLADE START
Activate the cutting blades safely and more efficiently.



HYDROSTATIC DRIVE SYSTEM
Smooth drive system for precise mowing – simply put your foot on the pedal and go.

MODELS AVAILABLE



XT2 PR95

Cutting width:	95 cm / 38"
Mowing area:	6,000 m ² /h
Grass bag capacity:	320 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



XT2 QR106

Cutting width:	106 cm / 42"
Mowing area:	8,000 m ² /h
Grass bag capacity:	320 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



XT2 PR106ie

Cutting width:	106 cm / 42"
Mowing area:	8,000 m ² /h
Grass bag capacity:	320 l, electric bag lift
Engine:	EFI Cub Cadet, V-TWIN dual cylinder
Engine displacement:	679 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



XT2 PS107

Cutting width:	107 cm / 42"
Mowing area:	8,500 m ² /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



XT2 PS117

Cutting width:	117 cm / 46"
Mowing area:	9,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



XT2 PS117i

Cutting width:	117 cm / 46", welded mowing deck
Mowing area:	9,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	EFI Cub Cadet, V-TWIN dual cylinder
Engine displacement:	679 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

Cub Cadet[®]

XT3[™]
ENDURO SERIES[™]



MAXIMUM STRENGTH AND POWER FOR THE TOUGHEST TASKS

Designed to meet the toughest and most demanding conditions, driven by true power packages and equipped with ultra-strong components – the Cub Cadet XT3 are the ultimate lawn tractors. The XT3 range are brimming with power, capable of mowing dense grass and transporting larger loads including a mechanical differential lock that provides optimum traction however tough the terrain.

KEY BENEFITS



GRASS BAG WITH ELECTRIC BAG LIFT

At the touch of a button, the grass bag of the XT3 QR106e lifts up and tips the cuttings out.



STRONG V-TWIN KAWASAKI ENGINE

Two-cylinder engine for demanding terrain with particularly quiet running and low fuel consumption.



LARGE GRASS BAG

Vast 360 litre capacity ensures maximum efficiency.



ANTI-DUST SYSTEM

Rear discharge with multi-layer dust apron included in the equipment protects against swirling grass and dirt.



WELDED MOWING DECK

For high durability and robustness on the XT3 QS137.



MODELS AVAILABLE

3-in-1
OPTION
Powered by
Kawasaki



XT3 QS127

Cutting width:	127 cm / 50"
Mowing area:	10,000 m ² /h
Grass bag capacity:	210 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

3-in-1
OPTION
Powered by
Kawasaki



XT3 QS137

Cutting width:	137 cm / 54", fabricated mowing deck
Mowing area:	11,000 m ² /h
Grass bag capacity:	210 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

3-in-1
OPTION
Powered by
Kawasaki



XT3 QR106e

Cutting width:	106 cm / 42"
Mowing area:	8,000 m ² /h
Grass bag capacity:	360 l, electric bag lift
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

The Bluetooth® wordmark and logo are registered trademarks of Bluetooth SIG, Inc.

XT1 OS96

XT1 OS107

XT1 OR95

ENGINE

Engine type	Cub Cadet	Cub Cadet	Cub Cadet
Engine displacement	547 cm ³	547 cm ³	547 cm ³
Rated power	6.1 kW / 2,050 min ⁻¹	9.4 kW / 2,400 min ⁻¹	6.2kW / 2,100 min ⁻¹
Cylinders	Single	Single	Single
Tank volume (capacity)	11.4 l	11.4 l	11.4 l

DRIVE SYSTEM

Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard

CUTTING SYSTEM

Mowing area in m ² /h	6,000	8,000	5,500
Cutting width	96 cm / 38"	107 cm / 42"	95 cm / 38"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting options	3-in-1 option	3-in-1 option	3-in-1 option
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12	12	12
Deck wheels	4 rounded deck wheels	4 rounded deck wheels	4 rounded deck wheels
Wash nozzle/Mulch Kit/ mulching blade	-/Standard/Standard	Standard/Standard/Standard	Standard / (196-551-000)/ (196-561-000)

DISCHARGE SYSTEM

Bag (capacity)/accessory no.	200 l optional/(OEMR190-180A)	200 l optional/(19A30003100)	320 l / (196-555-603 Anti-Dust-System)
Bag lever/hardtop	-/-	-/-	Rounded ergo telescopic handle/ synthetic material
Bag full indicator/grass deflector	-/Standard	-/Standard	Deluxe w Blade Shutoff/196-552-000

FRAME

Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Single Tube	Single Tube	Single Tube
Turning circle	TIGHT TURN 38 cm / 15"	TIGHT TURN 38 cm / 15"	TIGHT TURN 38 cm / 15"
Wheel size (f/r)	15" x 6" Turf Saver / 20" x 8"	15" x 6" Turf Saver / 20" x 8"	15" x 6" Turf Saver / 18" x 9,5"
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame

ELECTRIC

Headlights	LED	LED	LED
Bluetooth® App	-	-	-

COMFORT

Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
12 V plug	-	-	-
Mow in reverse (RevTEK™)	Standard	Standard	Standard

DIMENSIONS

LpA/LwA/LwAg (dB)	88/98/100	88/98/100	88/98/100
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	175 cm / 124 cm / 110 cm	175 cm / 134 cm / 110 cm	245 cm / 100 cm / 118 cm
Net weight	195 kg	195 kg	235 kg
Model number	13A8A1CF603	13A8A1CS603	13B8A1CB603

EAN



XT1 OR106

XT2 PR95

XT2 QR106

ENGINE			
Engine type	Cub Cadet	Kawasaki	Kawasaki
Engine displacement	547 cm ³	603 cm ³	726 cm ³
Rated power	6.6 kW / 2,250 min ⁻¹	9.3 kW / 2,150 min ⁻¹	11.6 kW / 2,100 min ⁻¹
Cylinders	Single	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4 l	11.4 l	11.4 l
DRIVE SYSTEM			
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m ² /h	7,500	6,000	8,000
Cutting width	106 cm / 42"	95 cm / 38"	106 cm / 42"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting options	3-in-1 option	3-in-1 option	3-in-1 option
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12	12	12
Deck wheels	4 rounded deck wheels	4 rounded deck wheels	4 rounded deck wheels
Wash nozzle/Mulch Kit/ mulching blade	Standard/(196-550-000)/ (196-560-000)	Standard/(196-551-000)/ (196-561-000)	Standard/(196-550-000)/ (196-560-000)
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	320 l / (196-555-603 Anti-Dust-System)	320 l / (196-555-603 Anti-Dust-System)	320 l / (196-555-603 Anti-Dust-System)
Bag lever/hardtop	Rounded ergo telescopic handle/ synthetic material	Rounded ergo telescopic handle/ synthetic material	Rounded ergo telescopic handle/ synthetic material
Bag full indicator/grass deflector	Deluxe w Blade Shutoff/196-552-000	Deluxe w Blade Shutoff/196-552-000	Deluxe w Blade Shutoff/196-552-000
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Single Tube	Loop	Loop
Turning circle	TIGHT TURN 38 cm / 15"	TIGHT TURN XTREME 17 cm / 6.6"	TIGHT TURN XTREME 17 cm / 6.6"
Wheel size (f/r)	15" x 6" Turf Saver / 18" x 9.5"	15" x 6" Turf Saver / 18" x 9.5"	15" x 6" Turf Saver / 18" x 9.5"
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC			
Headlights	LED	LED	LED
Bluetooth® App	-	Standard	Standard
COMFORT			
Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
12 V plug	-	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard
DIMENSIONS			
LpA/LwA/LwAg (dB)	88/98/100	88/98/100	88/98/100
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	245 cm / 110 cm / 118 cm	250 cm / 100 cm / 118 cm	250 cm / 110 cm / 118 cm
Net weight	258 kg	254 kg	253 kg
Model number	13B8A1CR603	13BGA1CB603	13BFA1CR603
EAN	 4 008423 872231	 4 008423 872279	 4 008423 872262

XT2 PR106ie

XT2 PS107

XT2 PS117

ENGINE

Engine type	Cub Cadet EFI	Kawasaki	Kawasaki
Engine displacement	679 cm ³	603 cm ³	603 cm ³
Rated power	9.9 kW / 2,150 min ⁻¹	10.4 kW 2,250 min ⁻¹	11.8 kW / 2,600 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	9.5 l	11.4 l	11.4 l

DRIVE SYSTEM

Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard

CUTTING SYSTEM

Mowing area in m ² /h	8,000	8,500	9,000
Cutting width	106 cm / 42"	107 cm / 42"	117 cm / 46"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting options	3-in-1 option	3-in-1 option	3-in-1 option
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12	12	12
Deck wheels	4 rounded deck wheels	4 rounded deck wheels	4 rounded deck wheels
Wash nozzle/Mulch Kit/ mulching blade	Standard/(196-550-000)/ (196-560-000)	Standard/Standard/Standard	Standard/Standard/Standard

DISCHARGE SYSTEM

Bag (capacity)/accessory no.	320 l, electric bag lift/ (Anti-Dust-System 196-555-603)	200 l optional/(19A30003100)	200 l optional/(19A30003100)
Bag lever/hardtop	Rounded ergo telescopic handle/ synthetic material	-/-	-/-
Bag full indicator/grass deflector	Deluxe w Blade Shutoff/(196-552-000)	-/Standard	-/Standard

FRAME

Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Loop	Loop	Loop
Turning circle	TIGHT TURN XTREME 17 cm / 6.6"	TIGHT TURN XTREME 17 cm / 6.6"	TIGHT TURN XTREME 17 cm / 6.6"
Wheel size (f/r)	15" x 6" Turf Saver / 18" x 9.5"	15" x 6" Turf Saver / 20" x 8"	15" x 6" Turf Saver / 20" x 8"
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame	Fully robotically-welded frame

ELECTRIC

Headlights	LED	LED	LED
Bluetooth® App	Standard	Standard	Standard

COMFORT

Seat type	High Back Seat Cub Cadet	High Back Seat Cub Cadet	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
12 V plug	Standard	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard	Standard

DIMENSIONS

LpA/LwA/LwAg (dB)	88/98/100	88/98/100	88/98/100
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	250 cm / 110 cm / 118 cm	180 cm / 134 cm / 110 cm	180 cm / 146 cm / 110 cm
Net weight	253 kg	210 kg	215 kg
Model number	13BZA1CR603	13AGA1CS603	13AGA1CT603

EAN



XT2 PS117i

ENGINE	
Engine type	Cub Cadet EFI
Engine displacement	679 cm ³
Rated power	12.6 kW / 2,600 min ⁻¹
Cylinders	V-TWIN dual cylinder
Tank volume (capacity)	9.5 l
DRIVE SYSTEM	
Transmission	Hydrostatic
Speeds	Infinitely variable (f/r)
Control	Foot pedal control
Cruise control	Standard
CUTTING SYSTEM	
Mowing area in m ² /h	9,000
Cutting width	117 cm / 46"
Cutting height (min-max)	25–100 mm
Cutting options	3-in-1 option
Number of blades	2
Deck engagement	Electric PTO
Deck height positions	12
Deck wheels	4 rounded deck wheels
Wash nozzle/Mulch Kit/ mulching blade	Standard/Standard/Standard
DISCHARGE SYSTEM	
Bag (capacity)/accessory no.	200 l optional/(19A30003100)
Bag lever/hardtop	-/-
Bag full indicator/grass deflector	-/Standard
FRAME	
Front axle	Heavy-duty cast-iron
Front bumper	Loop
Turning circle	TIGHT TURN XTREME 17 cm / 6.6"
Wheel size (f/r)	15" x 6" Turf Saver / 20" x 8"
Wheel bearings	Sleeve bearings
Frame	Fully robotically-welded frame
ELECTRIC	
Headlights	LED
Bluetooth® App	Standard
COMFORT	
Seat type	High Back Seat Cub Cadet
Seat adjustment	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard
12 V plug	Standard
Mow in reverse (RevTEK™)	Standard
DIMENSIONS	
LpA/LwA/LwAg (dB)	88/98/100
Vibration value body/K-factor	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²
Dimensions (L/W/H)	180 cm / 144 cm / 110 cm
Net weight	230 kg
Model number	13BZA1CN603
EAN	 4 008423 881943

XT3 QR106e

XT3 QS127

ENGINE		
Engine type	Kawasaki	Kawasaki
Engine displacement	726 cm ³	726 cm ³
Rated power	12.7 kW / 2,300 min ⁻¹	15.7 kW / 2,900 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4 l	11.4 l
DRIVE SYSTEM		
Transmission	Hydrostatic, All-Ground Traction System	Hydrostatic, All-Ground Traction System
Speeds	Infinitely variable (f/r)	Infinitely variable (f/r)
Control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard
CUTTING SYSTEM		
Mowing area in m ² /h	8,000	10,000
Cutting width	106 cm / 42"	127 cm / 50"
Cutting height (min-max)	25–100 mm	25–100 mm
Cutting options	3-in-1 option	3-in-1 option
Number of blades	2	3
Deck engagement	Electric PTO	Electric PTO
Deck height positions	12	12
Deck wheels	4 rounded deck wheels	4 rounded deck wheels
Wash nozzle/Mulch Kit/ mulching blade	Standard/(196-550-000/196-560-000)	Standard/Standard/Standard
DISCHARGE SYSTEM		
Bag (capacity)/accessory no.	360 l/electric bag lift and Anti-Dust-System	200 l optional/(19A30018100)
Bag lever/hardtop	Rounded ergo telescopic handle/ synthetic material	-/-
Bag full indicator/grass deflector	Deluxe w Blade Shutoff/(196-552-000)	-/Standard
FRAME		
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Bull Bar	Bull Bar
Turning circle	TIGHT TURN 38 cm / 15"	TIGHT TURN 38 cm / 15"
Wheel size (f/r)	15" x 6" Turf Saver / 18" x 9.5"	16" x 6.5-8" Turf Saver / 22" x 9.5"
Wheel bearings	Sleeve bearings	Ball bearings
Frame	Fully robotically-welded frame	Fully robotically-welded frame
ELECTRIC		
Headlights	LED	LED
Bluetooth® App	Standard	Standard
COMFORT		
Seat type	High Back Seat Cub Cadet/Armrests	High Back Seat Cub Cadet/Armrests
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard	Standard/Standard
12 V plug	Standard	Standard
Mow in reverse (RevTEK™)	Standard	Standard
DIMENSIONS		
LpA/LwA/LwAg (dB)	88/98/100	93/103/105
Vibration value body/K-factor	1 / 0.5 m/s ²	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²	5 / 1.5 m/s ²
Dimensions (L/W/H)	267 cm / 110 cm / 118 cm	197 cm / 155 cm / 110 cm
Net weight	268 kg	260 kg
Model number	13BIA5CR603	14AIA5CQ603
EAN	 4 008423 881950	 4 008423 872545

XT3 QS137

ENGINE	
Engine type	Kawasaki
Engine displacement	726 cm ³
Rated power	16.2 kW / 3,000 min ⁻¹
Cylinders	V-TWIN dual cylinder
Tank volume (<i>capacity</i>)	11.4 l
DRIVE SYSTEM	
Transmission	Hydrostatic, All-Ground Traction System
Speeds	Infinitely variable (f/r)
Control	Foot pedal control
Cruise control	Standard
CUTTING SYSTEM	
Mowing area in m ² /h	11,000
Cutting width	137 cm / 54"
Cutting height (<i>min-max</i>)	25–100 mm
Cutting options	3-in-1 option
Number of blades	3
Deck engagement	Electric PTO
Deck height positions	12
Deck wheels	4 rounded deck wheels
Wash nozzle/Mulch Kit/ mulching blade	Standard/Standard/Standard
DISCHARGE SYSTEM	
Bag (<i>capacity</i>)/accessory no.	200 l optional/(19A30018100)
Bag lever/hardtop	-/-
Bag full indicator/grass deflector	-/Standard
FRAME	
Front axle	Heavy-duty cast-iron
Front bumper	Bull Bar
Turning circle	TIGHT TURN 38 cm / 15"
Wheel size (f/r)	16" x 6.5-8" Turf Saver /22" x 9.5"
Wheel bearings	Ball bearings
Frame	Fully robotically-welded frame
ELECTRIC	
Headlights	LED
Bluetooth® App	Standard
COMFORT	
Seat type	High Back Seat Cub Cadet/Armrests
Seat adjustment	Lever, angled, 10 slide
Steering wheel	Ergo Soft-Grip
Toolbox/Cupholder	Standard/Standard
12 V plug	Standard
Mow in reverse (<i>RevTEK™</i>)	Standard
DIMENSIONS	
LpA/LwA/LwAg (dB)	93/103/105
Vibration value body/K-factor	1 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5 / 1.5 m/s ²
Dimensions (L/W/H)	197 cm / 167 cm / 110 cm
Net weight	270 kg
Model number	14AIA5CA603
EAN	 4 008423 872323

Cub Cadet[®]



**THE MOST
COMPREHENSIVE
RANGE OF ACCESSORIES
FOR XT LAWN TRACTORS**

The extensive range of Cub Cadet accessories will help to meet all your gardening requirements and means you can use your XT lawn tractor all year round.

LAWN TRACTOR ACCESSORIES



STEEL CARGO CARRYING PLATFORM FOR XT SERIES SIDE DISCHARGE

- Folds vertically and locks into place
- Easy to install thanks to the FastAttach™ System
- Max. weight: 36 kg
- Suitable for XT1 OS96, XT1 OS107, XT2 PS107, XT2 PS117, XT2 PS117, XT3 QS127 and XT3 QS137 side dischargers



ELECTRIC SPREADER FOR XT SERIES SIDE DISCHARGE

- Easy to install thanks to the FastAttach™ System
- Can be switched on/off from the driver's seat
- Capacity: 45 kg
- Suitable for XT1 OS96, XT1 OS107, XT2 PS107, XT2 PS117, XT2 PS117, XT3 QS127 and XT3 QS137 side dischargers



LAWN TRACTOR COVER L/XL

Size L: for small and medium sized lawn tractors



Size XL: for large-sized and rear discharge lawn tractors



MULCH KITS

Mulch Kit (without blades) for models XT1 OR106, XT2 QR106, XT2 PR106ie and XT3 QR106.
Mulching blades option available (196-560-000)



Mulch Kit (without blades) for models XT1 OR95, XT2 PR95 and XT3 QR95.
Mulching blades option available (196-561-000)



GRASS BAGS		
	Anti-Dust-System for 360 litre grass collection system, XT3 Series	4 008423 874976 Mod. no.: 196-553-603
	Anti-Dust-System for 320 litre grass collection system, XT1 and XT2 Series	4 008423 875089 Mod. no.: 196-555-603
	Twin bagger, 200 litre, for 96 cm / 107 cm decks of LT1 NS96, LT2 NS96 and LT3 PS107	4 008423 815849 Mod. no.: OEM-190-180A
	Twin bagger, 200 litre, for 96 cm decks of XT Series	4 008423 883350 Mod. no.: OEMR190-180A
	Twin bagger for 200 litre, for 107 / 117 cm decks of XT Series	0 043033 547708 Mod. no.: 19A30003100
	Twin bagger for 200 litre, for 107 / 117 cm, with variable tube, inspection window and FastAttach™ System, for XT Series	4 008423 879636 Mod. no.: 19A30030100
	Triple bagger 210 litre, for 127 / 137 cm decks of XT Series	0 037049 957286 Mod. no.: 19A30018100
DEFLECTORS		
	Rear deflector for all XT Series rear discharge models (for XT2 PR106ie & XT3 QR106e order number is ED-DEFLECT)	4 008423 875676 Mod. no.: 196-552-000
	Rear deflector for LT1 NR76, LT1 NR92, LT2 NR92 and LT3 PR105 rear discharge models	4 008423 836097 Mod. no.: 196-750A678
FRONT BUMPER		
	Front Bumper Kit with FastAttach™ fits all XT Series lawn tractors	4 008423 809046 Mod. no.: OEM-196B603
	Front Bumper Single, XT Series	4 008423 876086 Mod. no.: 196-562-000
	Front Bumper Loop, XT Series	4 008423 876093 Mod. no.: 196-563-000
	Front Bumper Bull Bar, XT Series	4 056494 171210 Mod. no.: 196-564-000



AGRICULTURAL TYRES

Chevron style rear wheels 18" x 9.5". Set consists of 2 complete wheels. Fits all tractors with either 18" or 20" rear wheels. Not approved for XT3 models.



TYRE CHAINS

For 20" x 8" wheels incl. adapter



For 18" x 9.5" wheels incl. adapter



For XT 18" x 8.5" wheels



For XT 22" x 9", 5" x 12" and 23" x 9", 5" x 12" wheels



DOZER BLADE AND RUBBER LIP

117 cm dozer blade for XT Series



Rubber lip – universal – for all dozer blades



117 cm dozer blade for XT Series



ADDITIONAL XT ACCESSORIES

Armrests for XT Series



Mod. no.: 196-564-603

Battery charger for XT Series



Mod. no.: 196-967-678

Electrical grass bag emptying mechanism for XT Series rear discharge system. Only suitable for 2018 and later models.



Mod. no.: 196-570-600

Fuel canister, 10 litre



Mod. no.: 196-558-603

WARRANTY

Cub Cadet offers a three year domestic user warranty across the entire range of garden machinery. This is great news for both customers and dealers, inspiring confidence in the quality and reliability of Cub Cadet products.

Details of terms and conditions can be found at www.cubcadet.co.uk.



For further information please contact your local Cub Cadet dealer

Text and photographs, specifications of dimensions and performance are composed with greatest care. The correctness of the information cannot be guaranteed, especially it is not guaranteed that the products comply with the images regarding colour, form and equipment or that the products comply with the proportion of the images. The engine horsepower information provided by the engine manufacturer is to be used for comparison purposes only. Amendments due to misprints or errors are reserved. Please see the operator's manual and the warning labels posted on the vehicle itself for more details.



CubCadet_uk



@CubCadet_uk

Cub Cadet Supported by Barrus

E. P. Barrus Ltd, Glen Way, Launton Road, Bicester, Oxfordshire. OX26 4UR
Tel: 01869 363658 Fax: 08714 290936 www.cubcadet.co.uk



The Power
Behind The Brands